SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1904, by Munn & Co.]

Vol. XC.—No. 18.
ESTABLISHED 1845.

NEW YORK, APRIL 30, 1904.

5 CENTS A COPY
$3.00 A YEAR.

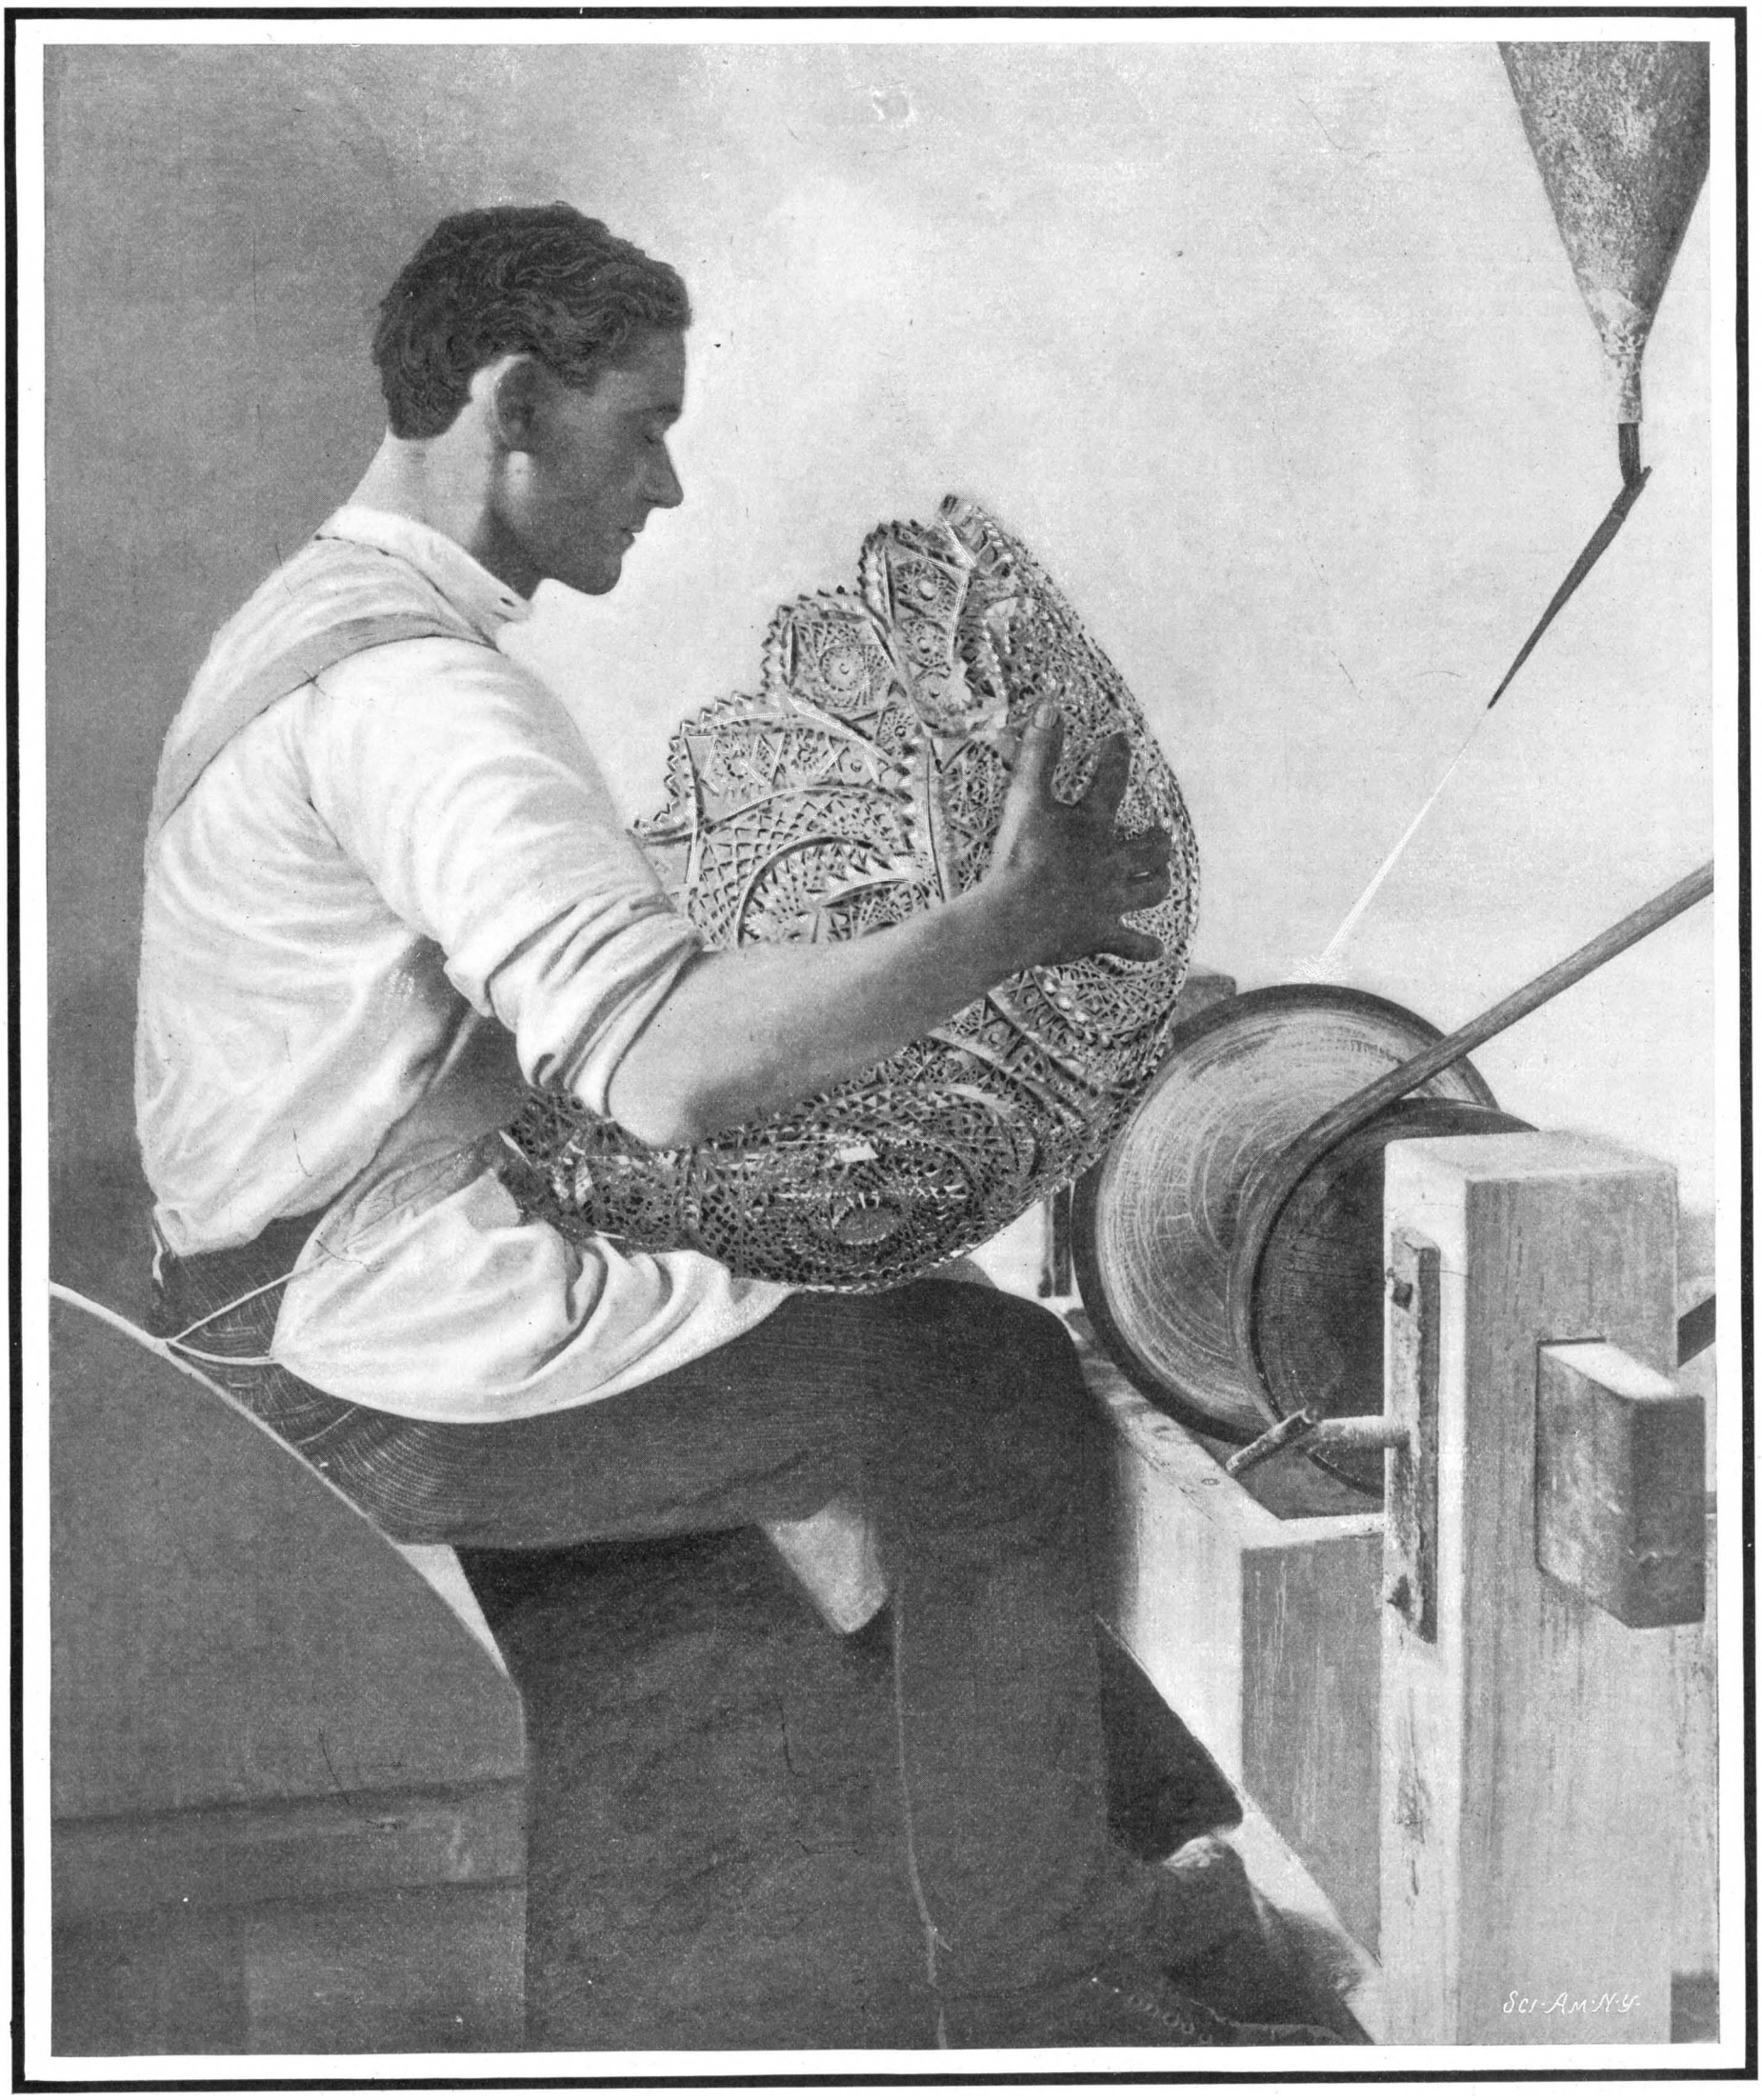

Polishing a 25-Inch Glass Bowl for Exhibition at the St. Louis Exposition. Height with Foot, 24 Inches; Weight of Bowl and Foot Before Cutting, 143 Pounds.

THE LARGEST PIECE OF CUT GLASS IN THE WORLD.—[See page 348.]

© 1904 SCIENTIFIC AMERICAN, INC

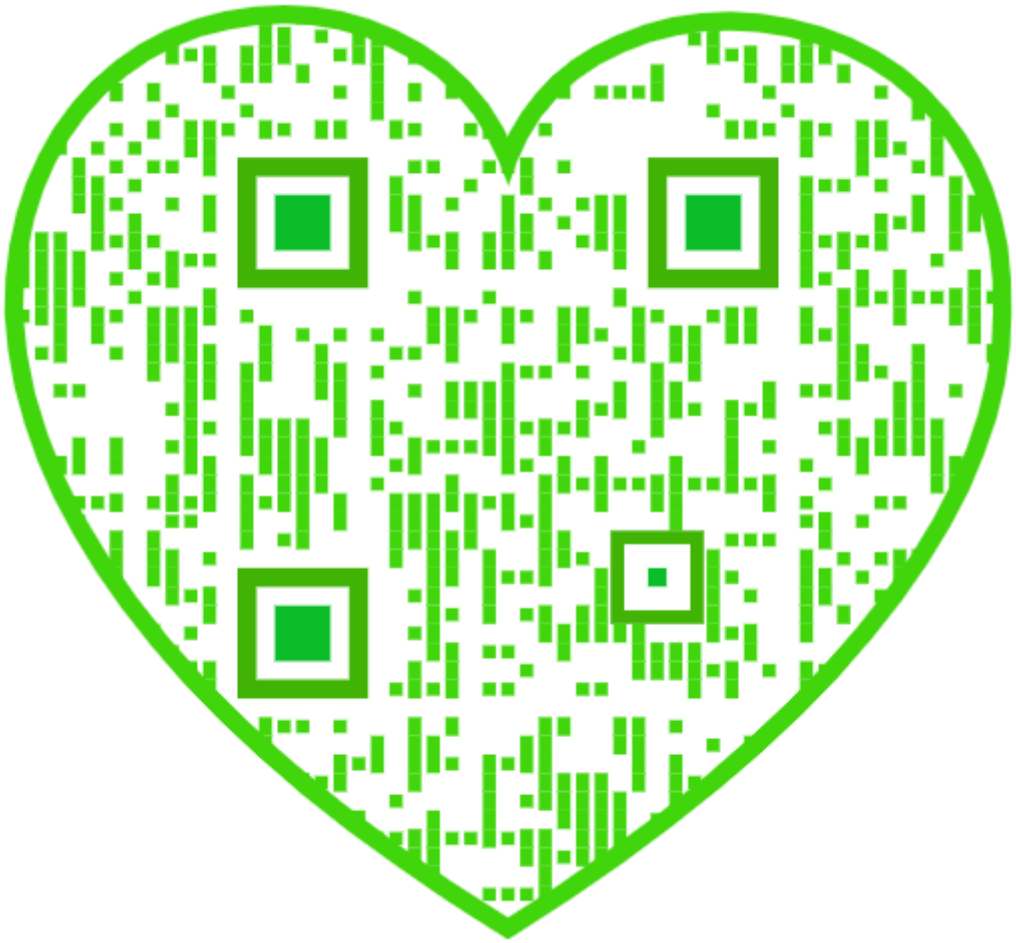

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) ..... $3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
Scientific American Building Monthly (Established 1885) ..... 2.50 "
Scientific American Export Edition (Established 1878) ..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, APRIL 30, 1904.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

THE AQUEDUCT COMMISSIONERS AND THE NEW YORK CITY WATER SUPPLY.

The object of constructing the new Croton dam, which was begun in 1892, was to relieve the pressing danger of a water famine in the city by increasing the storage capacity of the Croton system to its fullest extent. The Jerome Park reservoir was begun in 1895, with the object of providing an adequate distributing reservoir within the city limits, capable of impounding between two billion and three billion gallons of water, and providing Manhattan and the Bronx with from a week's to ten days' supply of water, which could supply the city temporarily, should there occur any break in the thirty-five miles of the new Croton aqueduct. It was the intention of the contracts that the new Croton dam be finished by July 1, 1899, and Jerome Park reservoir by November 1, 1902. As matters now stand, four years and ten months have passed since the contract date of completion of the Croton dam, and over two years more will be required to complete the structure. That is to say, if we may be so optimistic as to hope that the intolerable delays that have marked the construction of this dam in the past will not be repeated, it is possible that this urgently-needed work will be ready for public use seven years after the date on which it should have been completed, the contract taking fourteen instead of the seven years contemplated and promised for its execution. In 1903 the Acting Chief Engineer, in an official report to the Aqueduct Commissioners, stated that the Jerome Park reservoir, at the then rate of progress, would not be finished in less than four years from that date, that is to say, five years after the original contract date for completion.

In the presence of these astounding facts, it is not surprising to learn that the Merchants' Association of this city, whose good work in the safeguarding of the city's interests is on record, have considered the matter to be so serious as to call for the preferring of charges against the Board of Aqueduct Commissioners, upon whose shoulders they consider that the chief blame for this inexcusable neglect of the city's interests is to be laid. The Association states that it can be clearly shown, by the records of the Aqueduct Commission, that the Commissioners had knowledge of the grave exigencies confronting this city in the way of a possible water famine, and that they have explicitly recognized the need for expedition in providing new reservoirs; that these Commissioners have been specifically informed, by their Chief Engineers and by the Department of Water Supply, that action was urgently necessary for the due progress of the work; and that although they were thus informed, they refrained during several years from taking any steps toward compelling the active prosecution of the work and, indeed, that at no time since 1898 have they taken any effective or proper steps to compel the contractors of either the Cornell dam or the Jerome Park reservoir to observe their contract obligations as to time. The Merchants' Association claims that it is shown by the Aqueduct Commissioners' report that, in the case of the new Croton dam, the Chief Engineer, as far back as 1899, protested officially to the Aqueduct Commission against "the inexcusably flagrant delay" of the contractors, and recommended measures to compel satisfactory progress; but that no measures to compel progress were adopted at the time or since. It is further charged that in the case of Jerome Park reservoir also, the Aqueduct Commissioners have taken no action of any kind to enforce a reasonable degree of progress, despite the obvious and unjustifiable delay in every branch of the work, including the complete stoppage for about four years of work upon the northern half of the reservoir, on which expedition had been previously ordered by the engineers.

The indifference of the Aqueduct Commissioners to the needs of the city is claimed to be the more culpable, because they have repeatedly granted unmerited extensions of time, and this in the face of many reports made to them by their own engineers, that the contractors' delay was extreme and altogether unnecessary. These are grave charges, and in view of the unparalleled delay on both these urgently-needed public works, the public will not fail to draw its own conclusions as to the inefficiency of the Aqueduct Commissioners, and their apparent indifference to the trust that has been reposed in them.

The Commission is a body of laymen who were appointed for the express purpose of safeguarding the city's interests and seeing to it, not merely that contractors do their work well, but that they do it within contract time. Now, the SCIENTIFIC AMERICAN is perfectly well aware that there have been justifiable causes for some of the delay. There has been a change from core wall to solid masonry on a portion of the Croton dam, while at Jerome Park further delay has been occasioned by a similar change from core-wall embankments to solid retaining walls. We are perfectly willing to admit that these changes were necessary at the Croton dam, and that they may have been to a certain extent necessary at Jerome Park reservoir; but having admitted this much, we must confess that after reviewing the history of these two works, and going carefully over the charges made by the Merchants' Association, we cannot but feel that the Commission has done very little to justify its existence. Amid the continued and reiterated complaints against the delay in these works, we fail to remember a single instance in which the voice of the Commission has been heard in similar expostulation. Judging by its silence, the citizens of New York might well believe that the delay was causing the Commission but very little uneasiness.

It is gratifying to know that the charges of the Merchants' Association will be presented before a Mayor who has shown himself to be thoroughly independent and fearless in protecting and promoting the welfare of the city over which he presides.

LONGITUDINAL BULKHEADS AND BATTLESHIP STABILITY.

A correspondent has asked us to give an editorial discussion of the probable cause of the Russian battleship "Petropavlovsk's" capsizing so suddenly. At the outset we must frankly confess that in the present state of our knowledge of this disaster, it is impossible to give a definite answer; but we are inclined to think that, when our correspondent asks if the capsizing of the ship was due to a too great subdivision of the water-tight compartments, he has failed to understand the true functions of the multiple-compartment system. The primary object of subdivision is to localize the effect of under-water penetration of the hull, so that should a vessel run aground, the entering water would be confined to certain compartments of a limited capacity, and her buoyancy would not be too seriously impaired. An ordinary grounding of the vessel, a ripping open of the outer shell by a jagged point of rock, will usually admit water only to the double bottom. This has been shown in the majority of the accidents of this character to our own ships that have happened of late years. As a defense against the smashing in of a considerable area of the under-water hull by the ram or by the torpedo, it is customary to divide the ship transversely by several bulkheads, and also by a continuous longitudinal bulkhead that bisects the ship in the line of the keel from stem to stern. The various compartments thus formed are further subdivided both longitudinally and laterally, particularly in the wake of the magazines and engine and boiler rooms.

Our correspondent is under the impression that the capsizing of the "Petropavlovsk" was largely due to the existence of the longitudinal bulkheads, and he asks whether, had there been no bulkheads of this kind, the water would not have distributed itself across the vessel, and, by preventing the ship from listing heavily, have delayed her sinking until the majority of the crew had been rescued. The question is not by any means a new one, for it was brought into prominence many years ago by the sinking of the British battleship "Victoria," when she was rammed by the "Camperdown" during naval maneuvers in the Mediterranean, and went down with Admiral Tryon and most of her officers and crew. The hull was perforated on the starboard side a little forward of the 16¼-inch gun turret. The water entered rapidly, and, filling the starboard compartments, it caused the ship to list so quickly that she "turned turtle" before the boats from the other ships of the fleet could rescue her crew.

A naval board of inquiry that investigated the disaster considered the question of removing the longitudinal bulkheads, with a view to preventing the quick capsize of a rammed or torpedoed warship. But it was decided that, all things considered, longitudinal bulkheads were desirable; and they remain to-day a most important feature in the design of all modern warships. Furthermore, it is a mistake to suppose that all longitudinal bulkheading is water-tight. The keel of the ship in the double-bottom, and some of the other longitudinal members there, are perforated for the express purpose of allowing the water to flow freely across the ship in case of injury to the bottom. To follow out the same principle, however, on the various decks, would be to double, and in some cases quadruple, the amount of water that would be admitted to a ship were she rammed or torpedoed, a result which would merely mean that buoyancy was sacrificed to stability.

That the accepted system of subdivision is the correct one has received most emphatic demonstration in the present war; for there seems to be very little doubt that the quick loss of the "Petropavlovsk" was due to the fact that when the burst of flame of the exploded mine or torpedo tore its way into the ship, it ignited and exploded the magazines and rent the ship asunder, the action being similar to that which occurred in the case of our own battleship "Maine" in Havana Harbor. Therefore, the sinking of the "Petropavlovsk" can scarcely be quoted against the longitudinal subdivision system. The true test came in the case of the two battleships "Czarevitch" and "Retvizan," and the cruiser "Pallada," which were torpedoed in the opening engagement at Port Arthur. These vessels were undoubtedly saved by their elaborate system of subdivision of hull; for they were able to proceed from the outer roadstead under their own steam and beach themselves, thereby rendering subsequent salvage operations and repairs possible. Naval constructors, generally, consider that the salvage of these ships is a great tribute to the efficiency of the present cellular system of construction.

THE PREPARATION OF PURE ARGON.

In a paper recently read before the Academie des Sciences, Messrs. Henri Moissan and A. Rigaut describe a method which they use for preparing argon in large quantities in a pure state. In their first experiments, Lord Rayleigh and Sir Wm. Ramsay used the action of the spark on a mixture of oxygen and nitrogen, in order to separate the argon of the air. Afterward they used metallic magnesium, which retains the nitrogen in the form of nitride. In more recent experiments, Ramsay used the action of a mixture of lime and magnesium on the nitrogen of the air.

M. Moissan had previously shown that calcium combines easily with nitrogen at a low red heat, giving a crystalline nitride having the formula Ca_3N_2. As metallic calcium also has the property of absorbing hydrogen at the same temperature, giving a crystalline hydride CaH_2, and as this hydride is not dissociated at 500 deg. C., the writers proposed to apply these properties of the metal for the extraction of argon from the air. The preparation of the argon includes four different operations. 1. Preparation of 100 liters of nitrogen. 2. Increasing the proportion of argon contained in the gas. 3. First purification. 4. Second purification by circulating the gases over calcium. In this way a practically pure argon is obtained. The first operation is carried out by using two tubes 4 feet long and 1.2 inch inside bore, filled with copper turnings which had been first oxidized in air, then reduced by hydrogen. The gas is drawn through the tubes by suction into a gas-holder. The proportion of argon in the gas is then increased by making it pass through an iron tube 3 feet long filled with copper turnings; then, after a set of sulphuric acid and potash tubes, the gas passes through two iron tubes 2.5 feet long, filled with a mixture of 5 parts powdered quicklime and 3 of powdered magnesium. The tube containing the copper is heated to redness. After driving off the hydrogen, a rubber bag is placed at the end of the apparatus. Then 100 liters of nitrogen are passed in the apparatus, and in two hours it becomes diminished in volume and is brought down to 10 liters. The gas which is collected in the rubber bag contains 10 per cent of argon.

The next step (purifying the gas) is carried out by passing the gas through a potash drier into a large tube of Berlin porcelain 3 feet long and 1.5 inches diameter. The tube is heated in a Mermet furnace. It receives a sheet iron trough containing 80 grammes of the lime and magnesium mixture. After it comes a second tube of Jena glass containing the same mixture, then a smaller tube full of copper oxide. A sulphuric acid and potash drier complete the apparatus, which is connected to a mercury pump for the purpose of drawing the gas through and sending it into a large glass collecting cylinder 2.8 feet high and having a capacity of 1,100 cubic centimeters (67.14 cubic inches). By repeated operations, the pump empties the gas-bag in 2 hours. The gas which is finally collected is nearly pure argon, containing only 5 to 10 per cent of nitrogen.

To obtain a practically pure argon, the following operation is carried out: The gas is passed from the cylinder through a tube of Jena glass containing 45 grammes of lime and magnesium mixture. After it comes a second tube containing four troughs of nickel in which are placed 3 or 4 grammes of metallic calcium in small pieces. Two mercury pumps are connected to the apparatus by a three-way cock. The first pump serves

© 1904 SCIENTIFIC AMERICAN, INC

to produce a vacuum in the apparatus in the beginning. The second causes the circulation of the gas in the tubes, which are heated to low redness. In this way, by applying the characteristic properties of calcium noted by M. Moissan, the small quantities of nitrogen and hydrogen are retained by the calcium and the argon comes off in a practically pure state. The gas is collected in bottles of 250 c.c. capacity. To find out whether the argon is pure, it was studied by the spectrum of an induction spark, which showed the characteristic lines for argon, while nitrogen was practically absent. This new method therefore affords a good working process for preparing pure argon in considerable quantities.

SOARING FLIGHT.

BY GARRETT P. SERVISS, JR.

Among the many phenomena exhibited by flying birds, and observed and studied in attempted solution of that most interesting and baffling of all engineering problems, mechanical flight, there is one which is so remarkable in its paradoxical nature, that it has attracted perhaps more attention than all the others together. I refer to soaring, or, as it is sometimes called, sailing, and, in one of its aspects, aspiration. In performing this feat, the bird holds its outstretched wings absolutely motionless, and remains suspended in the air, traveling in any desired direction without, so far as can be observed, the expenditure of the slightest amount of energy. This feat seems so absolutely impossible on first sight that men have doubted their own senses, and have taken photographs of soaring birds, hoping that the camera plate, more rapid than the eye, would be able to detect some lightning-like movement of wing which would account for the bird's support. So far as the writer is aware, no such movement was ever detected. It remains then for us to explain the phenomena on mechanical principles, or else to admit that our theories of the action of elastic fluids, such as the air, are erroneous. Such explanations have been given, it is true, but so many of them are erroneous—indeed, I hope to show that only one of them is entirely reasonable—that it seems desirable to review them, and to endeavor to show that there is one other way in which the birds frequently use the energy of the wind for their support and propulsion.

For convenience in reviewing the explanations already suggested, it will be well to divide them into three general classes:

1. Attempts to explain soaring in uniform horizontal winds.

2. Explanations which require the assumption of ascending wind currents.

3. Explanations depending upon a wind continually varying in velocity or direction, or both.

The advocates of the first class of explanations have held that some particular shape of the bird's wings might have a peculiar action upon the air, so deflecting it that the wing would be forced upward and forward into the teeth of the wind. Others have invented highly ingenious but totally inadequate evolutions, by the performance of which the bird would be enabled to gain elevation, and eventually travel in any direction by sailing down an inclined path. It is not necessary here mathematically to treat in detail these explanations, though it is entirely possible. It will suffice to show by very simple considerations, the essential fallacy involved in any theory of soaring in uniform horizontal air currents. In the first place, consider a bird being supported stationary in the wind. The downward pull of gravity upon the bird must be counteracted by an equivalent upward force. This upward force on the bird has its reaction upon the air particles under the bird's wings, and the downward force on the air produces a downward acceleration of the air particles, which, combining with their forward motion, produces a resulting velocity greater than the original velocity. This means that the air, in passing the bird, has its energy increased, which is contrary to the law of the conservation of energy. In case the bird is performing evolutions instead of remaining stationary, the force upon the bird and air particles varies both in direction and amount, but an integration still shows an increase of total energy in the wind.

This is the basis of an exact treatment, and is given because the increase or non-increase in total energy of the wind when passing the bird furnishes a universal criterion for determining the possible correctness of any explanation of the phenomenon in question. A much simpler conception, however, has been suggested by someone, and we will give this briefly before taking up the next class of explanations. The air confined in a railroad car in motion constitutes a true uniform horizontal wind with regard to the earth. Yet no one could conceive of a bird performing evolutions with motionless wings, and remaining supported indefinitely in the air carried by the car.

In the second class of explanations, it is assumed that the lower strata of air moving over the earth's surface are retarded by friction and piled up, thus deflecting the strata above, and giving the wind a slight trend upward. Marked upward wind currents also exist over natural wind breaks, and on the slopes of hills when the wind is blowing toward the higher ground. Soaring birds, it has been stated by careful observers, seem to prefer such places in which to perform their aerial evolutions. Granting the existence of upward wind currents, we can understand one way in which soaring is accomplished.

Consider a kite against which a horizontal wind is blowing. The pressure of the air is normal to the kite surface, and is thus a force directed upward and backward. If now the backward component is neutralized by the pull of the string, the kite will remain suspended in the air through the vertical component of the wind's pressure. If we release the string, the kite will drift backward by virtue of the horizontal component of pressure, and sink to the ground. Suppose, however, that the wind takes an upward trend. The kite may now be tipped down in front; and if the wind is rising at a sufficient angle, the kite may even take a horizontal position, and still present the same angle to the wind. In this case the pressure upon the kite, always normal, will become a vertical force. If the wind tends upward at a still greater angle, the kite may be tipped down in front until the front edge is lower than the back, in which case the horizontal component of the pressure is directed forward opposite to the direction of the wind. If the kite could maintain equilibrium, it would advance into the wind under these conditions, and remain in the air indefinitely. Kite experimenters have observed this very action at times, and it is a true case of soaring, or better, aspiration.

Thus we see that the existence of upward wind currents is sufficient to render flight without exertion possible, but that soaring is always or even frequently due to such currents is very doubtful. We must then look to our third class of explanations to complete the theory.

Prof. Langley, by careful measurements of air velocities, has shown that all winds are extremely variable, his readings having indicated changes in velocity of ten miles or more per hour in a small fraction of a second. His investigations are fully described in his paper, "The Internal Work of the Wind," but his theory will be briefly stated here. A bird flying in such a variable wind would be carried along at the average velocity of the air, while the alternate puffs of high and low velocity would constitute alternate virtual winds, first blowing by him in the direction of his motion, and then against him in the contrary direction, his inertia preventing him from following the rapid fluctuations. Under these conditions, the bird by facing about first toward the virtual wind in one direction, and then toward that in the other, could always present his inclined wings to a current of air, and obtain a supporting reaction. The facing about might be accomplished by sailing in circles, an evolution often observed. This in brief was Langley's theory, and highly ingenious it is. It may under exceptional conditions be the manner in which soaring is accomplished, but in ordinary winds the variations in velocity certainly cannot exceed fifteen miles an hour, and even if these variations occurred extremely rapidly, the bird would only be subjected to a virtual wind of less than seven miles per hour, which is totally inadequate to support any known soarer.

Looked at in a slightly different way, however, the writer believes that the variations in velocity of the wind may be shown to be sufficient to account for all the observed phenomena of soaring. In the first place, the relative velocity of the bird to the air, which is effective in supporting the former, must be quite high. Langley has shown that at certain velocities a plane may support as much as three hundred pounds per horse-power expended, but this velocity is much higher than the five or six miles an hour which is secured in the action just described. The bird, then, cannot drift with the same velocity as the average wind, but must possess a velocity of perhaps twenty miles an hour with regard to it, to obtain support with the energy available. How, then, can this internal energy existing in the wind by virtue of its streakiness be utilized to propel a body traveling at twenty miles an hour with regard to it? Obviously, only by taking advantage of changes in velocity occurring at *right angles* to the direction of the bird's motion. Each time such a change occurs, the bird has added to its velocity a perpendicular component, which, combining with the motion which it already had, produces a resultant velocity greater than the initial. Since the kinetic energy due to the bird's motion is proportional to the square of the velocity, and since the square of the resultant velocity is the sum of the squares of the initial and the impressed velocities (being perpendicular to each other) it is evident that the bird has absorbed all the energy which the variation in the velocity of the wind could impart, and converted it into energy of motion in its new path. Of course, if the acquired energy is being continually used for support, no increase in velocity will result.

In performing such an evolution, the bird would be forced to bring its wings into a more or less vertical position, to take full advantage of these horizontal puffs of wind, and this probably accounts for the frequency with which soaring birds move in circles, for while moving thus, the centrifugal force allows them to tip up the plane of their wings. In describing this path, the center of the circle may drift with the average wind, while the bird takes advantage of every favorable puff to produce an acceleration perpendicular to the tangent at the time it occurs. The writer has many times observed sea-gulls soaring in just such distorted circles as would be produced by this action. In this action the bird takes full advantage of the "internal work of the wind" to maintain the velocity for support which its ratio of weight to wing surface renders most efficient.

Whether or not this proves to be the final solution of the problem, it is evident that soaring is much too complicated for man to imitate, at least until he has had long experience with motor-driven machines.

SCIENCE NOTES.

E. Salvioni has devised and accurately examined a microbalance which consists of a thin thread or very thin ribbon of glass or other material, fixed at one end and placed in a closed case; the case also contains a number of small weights (the larger of platinum wire, the smaller of silk thread) which, with the aid of a handle, can be placed on the flexible thread or ribbon. The flexure of the thread when loaded is observed by means of an ocular micrometer, and, as verified by the author for his instrument, is proportional to the weight which produces it; a conveniently placed spider thread serves as a sight-line for the measurement of the displacements. A glass thread 10 centimeters long, and one of two-tenths of a millimeter in diameter, will support by flexure a weight of more than 100 milligrammes, and, if provided with an optical arrangement which magnifies one hundred times, will serve to weigh to one-thousandth of a milligramme. To avoid the inconvenience caused by subsequent elasticity, the balance is provided with a stop, which enables the flexure to be maintained after unloading. Salvioni finds that the loss of weight of musk by volatilization is clearly demonstrated by this instrument. The loss is proportional to the time.

In a study of the circulation of the atmosphere of the sun, in the Monthly Weather Review, Prof. Frank H. Bigelow presents a mass of data and observations showing that "the sun should be regarded as an incipient binary star." Recent scientific work in investigating the circulation of the solar atmosphere in accordance with the laws governing the convective and radiative action of a large mass of matter contracting by its own gravitation, have led Prof. Bigelow to the hypothesis, that "the single fiery envelope conceals two disks." A series of observations extending over many years on the period of solar rotation at various points on the surface shows that "the same meridian of the sun is seen twice in a single rotation of the entire mass, first as the eastern limb, and second, thirteen days later, as the western limb. Whatever may be the intrinsic activity of the sun at a given zone and on a given meridian, that display becomes visible twice, first to the east, and second, to the west." The tables prepared by Prof. Bigelow giving the rate of angular rotation of various zones of the sun's surface show that it is far from uniform, being increased in proportion to the distance from the equator. As yet little has been done regarding "the fundamental problem of the mode of the internal solar circulation." This difference of external activity of the sun "on two opposite sides of its mass, as if a certain diameter had greater energy than the one at right angles to it," is similar to a recent discovery of Prof. Bigelow in regard to the earth's atmosphere, and leads him to the conclusion already stated, that "this persistent excess of outflowing energy on two opposite sides of the sun suggests the possibility that the sun should be regarded as an incipient binary star where the dumbbell figure of rotation prevails instead of the spheroidal. If this is really the case, and the evidence suggests it, then there would be a reason for the existence of the two primary centers of activity of the sun instead of its having a single center. From this we would expect to find that the sun has two magnetic and two meteorological systems, and indeed some double-acting system appears to impress itself generally upon the solar cosmical relations. This view is quite in harmony with the well-known fact of the existence of numerous binary systems of suns more or less widely separated, and it can not be regarded as unlikely that the sun is developing in the same way. The enormous mass of the sun would seem to entice its constituents to group themselves preferably about two centers for the physical processes involved in circulation and radiation, rather than about one, and I suspect that this is the correct explanation of several well-known phenomena."

© 1904 SCIENTIFIC AMERICAN, INC

A GERMAN HIGH-SPEED LOCOMOTIVE.

It will be remembered that toward the close of the recent high-speed electrical tests on the Berlin-Zossen government railroad, it was decided to carry out another series of tests, this time of steam locomotives, to determine what was the highest practicable speed that could be obtained with railroad trains of a given weight hauled by steam locomotives of exceptional power designed especially for this work. The accompanying illustration was made from a photograph of one of these engines which, a short time ago, was completed at the works of Messrs. Henschel & Sohn, Cassel, Germany. The locomotive was designed to haul a train of four or five corridor passenger coaches, of a combined weight of 200 American tons at a sustained speed of 80 miles an hour, and with an indicated horse-power of 1,400.

The locomotive is a three-cylinder compound, with the high-pressure cylinder located inside, and the two low-pressure cylinders on the outside, of the frames. The inside high-pressure cylinder is connected to a crank on the axle of the forward pair of driving wheels, while the low-pressure cylinders are connected to the rear driving wheels; all four wheels are coupled together. Forward under the smokebox is a four-wheeled truck, and another four-wheeled truck is located beneath the firebox.

The tender is carried on two four-wheeled trucks, and all the wheels, both of locomotive and tender, are fitted with both hand and air brakes, the latter working under a pressure several pounds higher than is customary. The total length of the engine from the front of the locomotive to the rear of the tender is 81 feet. The peculiar appearance of the locomotive is due to the fact that both the engine and tender are completely incased in a sheet steel covering, which is finished at the front of the locomotive with a wedge shape, with the object of reducing the air resistance. The chief engineer has his cab in this wedge-shaped front, which is provided with large glass windows to give him an unobstructed view ahead. He has an assistant engineer in the cab, who takes his turn at stoking with the fireman. Communication between the fireman and engineer is had by means of running boards located inside the engine casing; while at the rear of the tender there is a gangway, which permits of communication from end to end of the train, from the engineer in his cab to the conductor or "guard" at the rear of the train.

The locomotive has a grate area of 50 square feet, and a heating surface of 3,000 square feet. The capacity of the tender is 4,000 gallons of water and 7 tons of coal. When it is fully equipped for service, the locomotive weighs 177,000 pounds, and the tender 128,000 pounds, the total weight of engine and tender being, therefore, about 150 short tons. This load has been so distributed that the concentrated wheel load will in no case exceed that which is allowed by the official regulations. It is interesting to know that this locomotive, which has been designed according to Baurat Wittfeld's data, is to be exhibited at the St. Louis World's Fair after a series of trial runs has been completed.

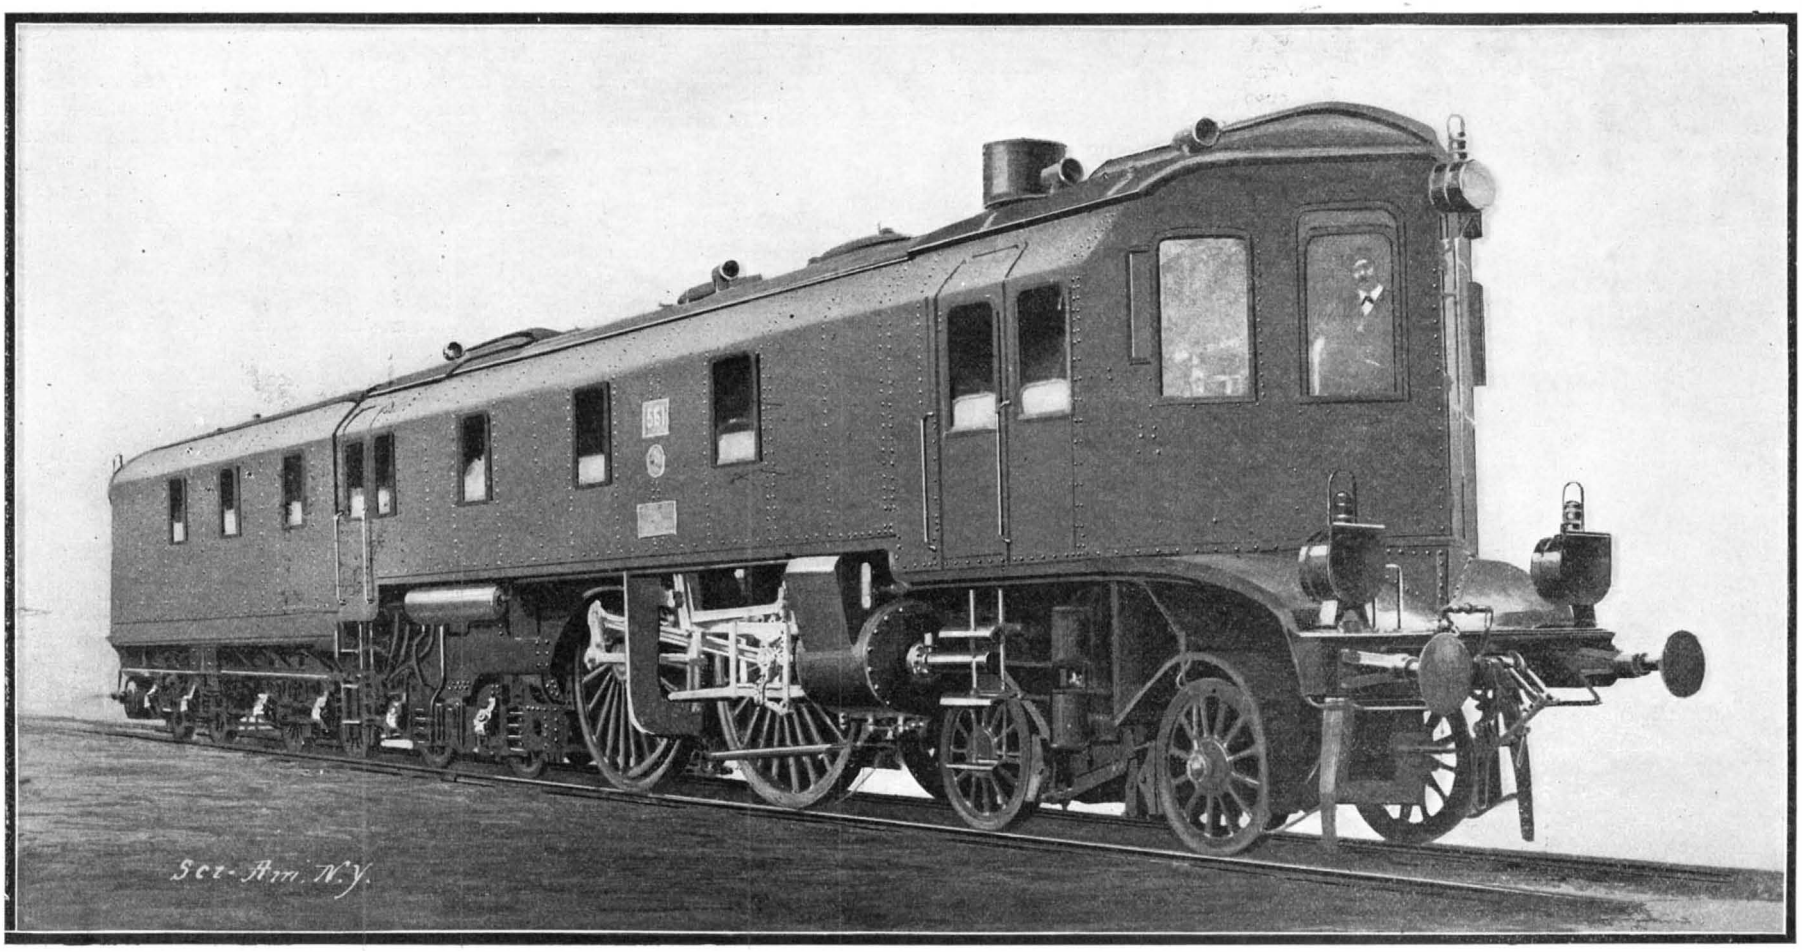

GERMAN HIGH-SPEED LOCOMOTIVE.

A New Mineral from Ceylon.*

BY SIR WILLIAM RAMSAY.

In the beginning of February I bought from Mr. Holland five hundredweight of the mineral described by Prof. Dunstan in Nature. It crystallizes in cubes, and the density is substantially that found by him. Mr. Tyrer, of the Stirling Chemical Works, Stratford, was so kind as to promise to work it up for me, and the process is still being carried on.

I had hoped to have positive and definite results to communicate before describing its constituents, but the publication by Prof. Dunstan of an analysis, and his statement that he is still engaged in its investigation, makes it necessary to write this letter.

The mineral, when heated alone, gives off 3.5 cubic centimeters of helium per gramme; fused with hydrogen potassium sulphate, the amount is increased to 9.5 cubic centimeters. From this source I have already stored about 12 cubic feet of pure helium extracted in Mr. Tyrer's works.

It was at first believed that the mineral was rich in uranium, but different specimens contain only from 8 to 12 per cent of that element, agreeing in this respect with the analyses published by Prof. Dunstan. Next, the other main constituent was believed to be zirconium, but the high density of the mineral rendered this improbable. An analyst of high standing, whose daily business it is to analyze minerals of this kind, returned 82 per cent of zirconia as a constituent; the percentage of thorium was trifling—under 1 per cent. The mineral contains practically no thorium; this has been repeatedly confirmed in my laboratory. Nor does it contain any appreciable amount of cerium, lanthanum, and didymium. The oxalate is almost completely soluble in excess of ammonium oxalate—a reaction which excludes thorium and the cerium group, but which points to zirconium. The equivalent of the elements of the oxalate group, which I at first took for zirconium, excludes the presence of any large quantity of zirconium, although that element is undoubtedly present. Fractionation shows that the oxalate precipitate (the portion soluble in ammonium oxalate) gives equivalents between 25.0 (the most insoluble portion of the double sulphate) and 44.7 (the most soluble portion); by far the major part of the element has the last-mentioned equivalent. The separation of this portion is now being carried out with large quantities of material; several hundredweight is being worked up.

Assuming that the element is a tetrad, which is probable from its behavior, it undoubtedly possesses an equivalent approaching the highest number (44.7), and for this there is a gap in the periodic table between cerium and thorium; one at least of the elements present (supposing that there is more than one present) will probably have an atomic weight of about 177, preceding tantalum (182.5) in the horizontal row of the periodic table.

I am at present engaged in mapping the spectrum of this new body or bodies.

As for the radio-activity, the mineral was bought in the hope that it would have a high content of radium. There is a trace of radium present, due, no doubt, to the spontaneous change of the uranium which the mineral contains. But the radio-activity due to this source is certainly not 5 per cent of the total.

The period of decay of the emanation appears to point to the presence of a radio-active element closely resembling thorium X. The half value is 50 or 51 seconds, and while this is not quite the time for the decay of thorium emanation, it very nearly approaches it; at present the balance of evidence appears to point to the presence of an element closely resembling thorium, but not identical with it. The total radio-activity, moreover, is much greater than can be accounted for by the supposition that the one consists of pure thoria. Within the limits of a letter I am obliged to omit many more characteristics of this curious ore which have been ascertained, but I hope soon to be able to publish more definite results; as it is, I regret to have been obliged to tell an imperfect story.

I should like to conclude by acknowledging the great assistance given me in this work by Mr. Tyrer and by my students, Messrs. Gimingham and Le Rossignol.

*Nature.

Utilizing Whale Carcasses.

It is announced that the American company which established the plant at Balena, Newfoundland, using the Russmuller process of utilizing the carcasses of whales, has met with complete success and that the government of Newfoundland has established new plants at Chateau, St. Lawrence, Agnaforte, Cape Royal, and Snooks Arm. There are now in the course of construction and nearing completion plants at St. Mary's, Trinity, Safe Harbor, Lemonine, Lance au Loupe, Cape Charles, Notre Dame Bay, and one in Labrador, all of which are operated under the same process. Up to 1892 the business of utilizing commercially the carcasses was carried on by an English syndicate, which employed a number of experts, but gave up the business after expending a capital of $180,000. Every ounce of the whale is used in the manufacture of oil, stearin, bone meal or bones, and other articles of commerce which are shipped abroad. This new industry employs a capital of more than $1,000,000 and furnishes employment to over 1,000 men, many of whom were forced to go elsewhere each season to obtain work.

Discovery of a New Comet by Dr. Brooks.

Dr. William R. Brooks, director of Smith Observatory, and professor of astronomy at Hobart College, discovered a new comet on the evening of April 16, in the constellation Hercules. Its position at discovery was right ascension 16 hours, 58 minutes, 10 seconds; declination north, 44 degrees, 10 minutes.

A second observation was secured on the evening of April 17, with a position of right ascension 16 hours, 55 minutes, 5 seconds; declination north, 44 degrees, 48 minutes. This gives a daily motion of three-quarters of a degree in a northwest direction. The comet is at present a fairly bright telescopic object with a short tail.

It is the first comet of 1904 and the twenty-fourth comet discovered by Prof. Brooks.

© 1904 SCIENTIFIC AMERICAN, INC

THE "WOLVIN," THE LARGEST FRESH-WATER STEAMSHIP AFLOAT.

BY W. FRANK M'CLURE.

On April 9 the new steamer "Augustus B. Wolvin," the largest fresh-water vessel in the world, was launched at the yards of the American Shipbuilding Company at Lorain, O., harbor. Inasmuch as this vessel is 62 feet longer than the largest vessel ever before built for the Great Lakes, and embraced several important new features of construction, the launching was of unusual interest throughout the industrial world, and was witnessed by some 20,000 people. Men from the coast yards were present.

In dimensions, it is said that there are few strictly freight vessels upon the ocean that exceed the "Wolvin." She is 560 feet over all, 540 feet keel, 56 feet beam, and has a depth of 32 feet. She is built of steel, and in this connection it is a noteworthy fact that she is just twice the length of the first steel vessel built for the lakes, in the year 1887. About three years ago four vessels were launched from the yards at Lorain with a length of 498 feet, 52-foot beam and 30-foot depth. These were the "John W. Gates," "J. J. Hill," "Isaac L. Elwood," and the "Edenborn." The cost of the new steamer "Wolvin" is close to a half-million dollars. On account of the building of this boat, the drydock at Lorain was lengthened 60 feet, at a cost of $10,000.

One of the most interesting features connected with the construction of the new vessel is the shape of the cargo hold, which is built in the form of a hopper, with sides that slope from the main deck to the tank top, and ends built on the same slope. The continuous length of this hopper, without divisions of any kind, is 409 feet. Its width at the top is 43 feet and at the bottom 24 feet. This form of construction, it will at once be seen, will best accommodate the automatic "clamshell" unloading machines, by keeping the ore cargo at all times within the grasp of the giant scoop. This will therefore obviate the greatest difficulty heretofore experienced in operating these machines.

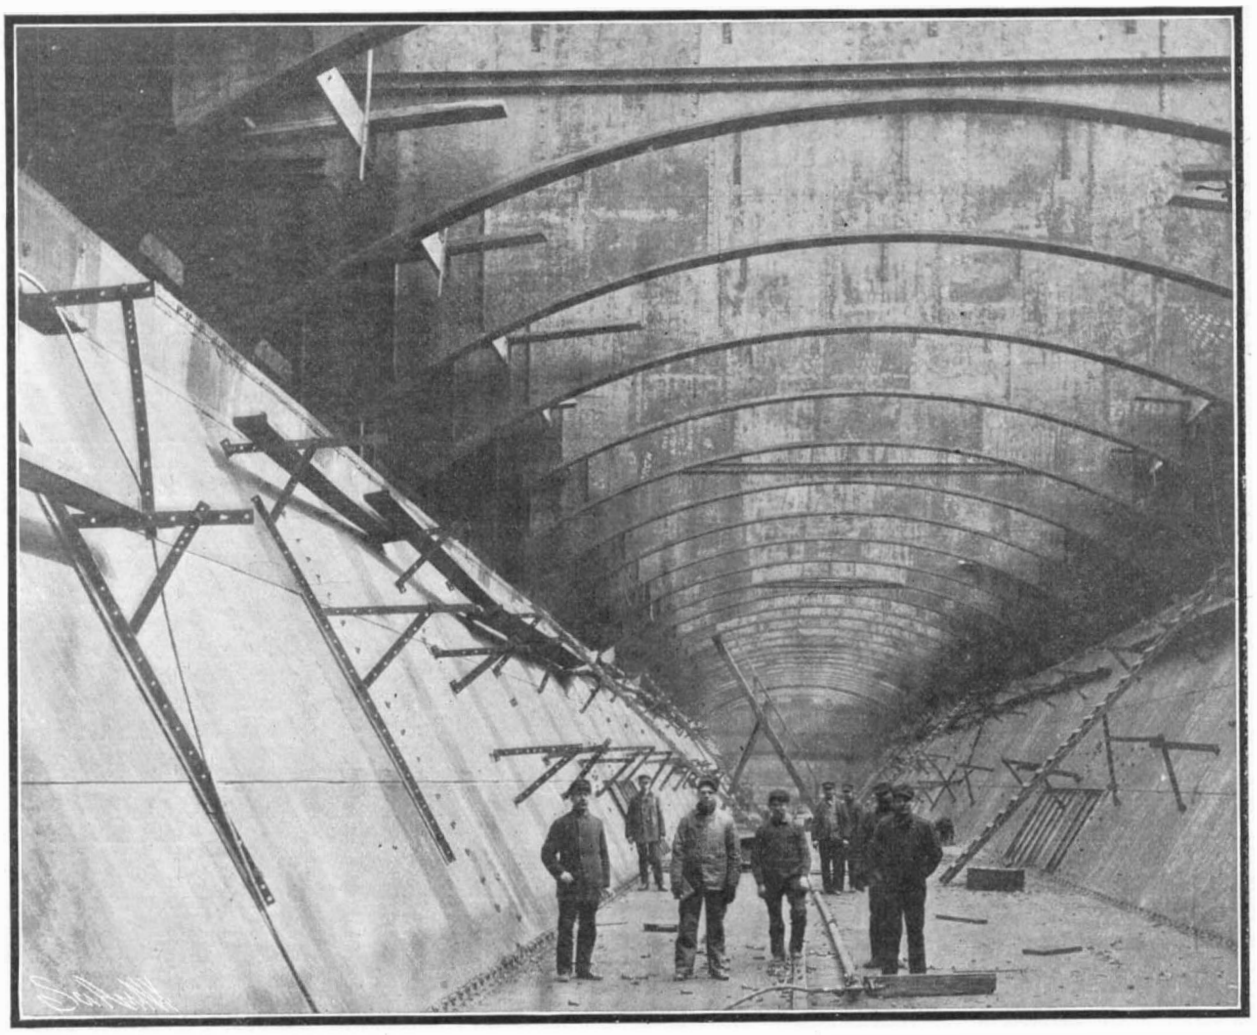

The Hopper Hold, Showing the Steel Arches Which Support the Upper Deck and Hold the Sides of the Hull to Form.

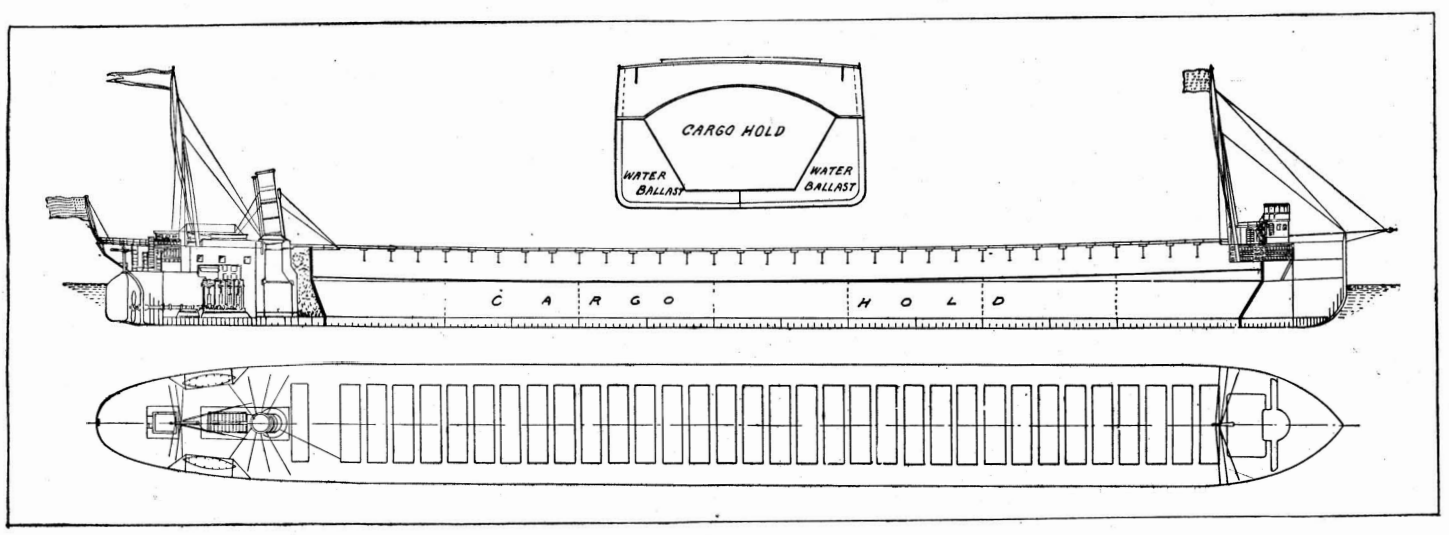

Transverse Section, Inboard Profile and Plan, Showing the One Great Hopper Hold, 409 Feet Long, with Its 33 Hatches.

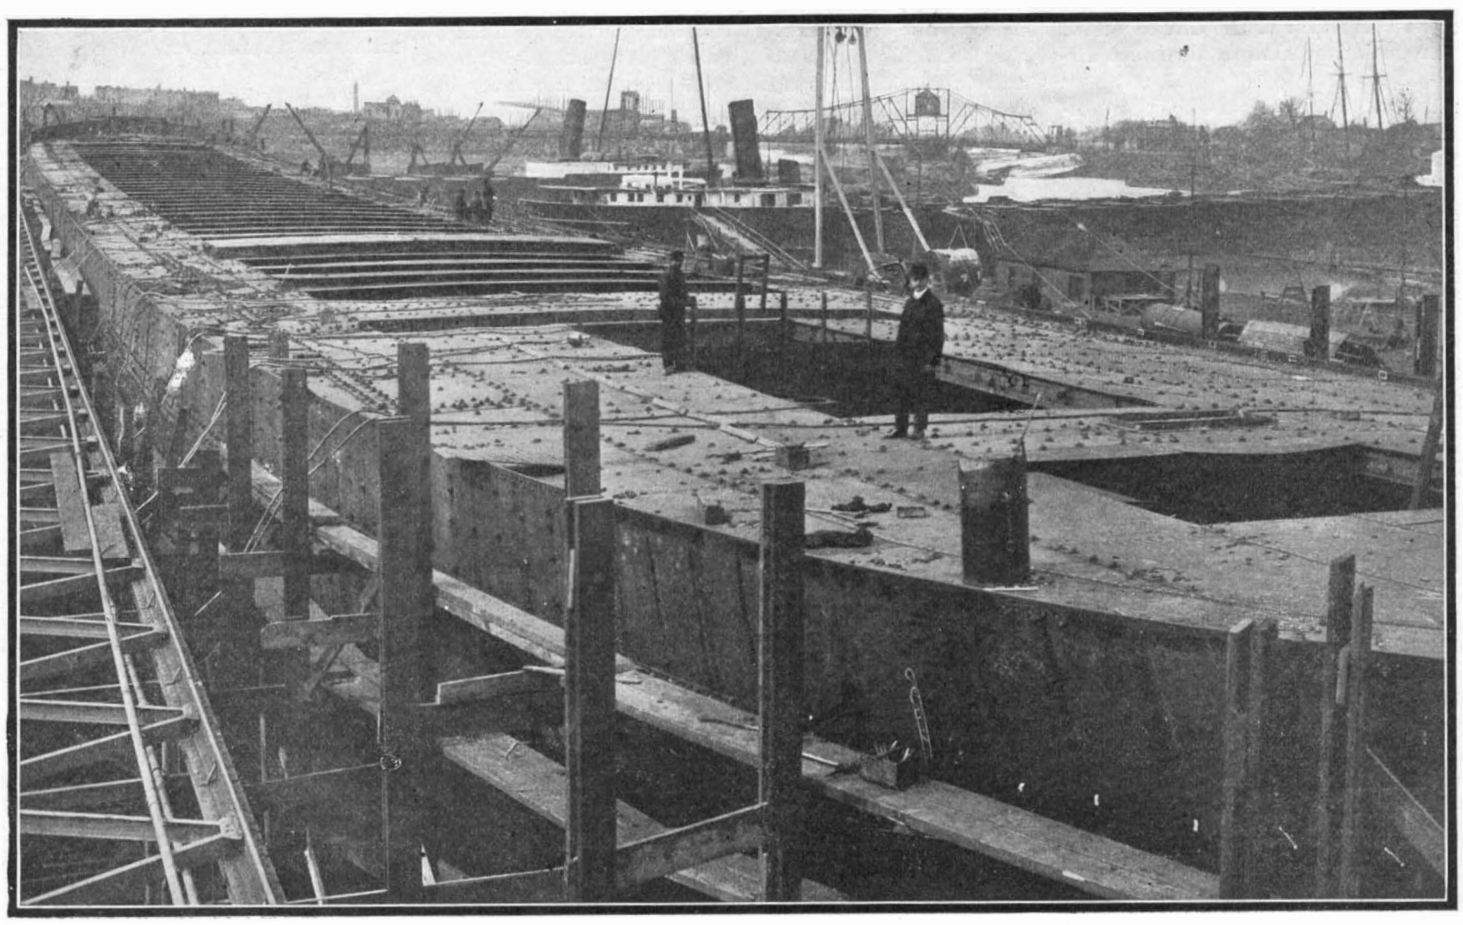

Length, 560 feet; Beam, 56 feet; Depth, 32 feet; Cargo capacity, 12,500 tons.

THE "WOLVIN," THE LARGEST FRESH-WATER SHIP IN THE WORLD.

The space between the sides of the hopper and the sides of the vessel is used for water ballast, so that the latter, as well as being in the usual double bottom underneath the hopper, extends up the sides to the height that may be desired. The water-ballast space is divided into compartments by water-tight athwartship bulkheads at intervals of some 60 feet. The total water-ballast capacity is 8,000 tons of water. Instead of the ordinary hold stanchions, there is a system of girder arches which support the upper deck as well as the sides of the ship. More than 750,000 rivets were used in the construction of this vessel. In all, it contains 4,500 tons of steel.

There are thirty-three hatches with 12-foot centers. Each hatch measures 33 x 9 feet in the clear. The patent hatch covers are opened and closed by machinery. The only erections on the spar deck are the dining-room skylight aft, the coamings around the engine and boiler openings, and the pilot-house and texas forward. Steam has been used in every possible instance where manual labor could be saved. On the spar deck there are six 8-inch by 10-inch single-drum engines, each carrying a steel-wire mooring line. Then there is a steam windlass to be used for handling the two 8,000-pound anchors, while on the spar deck aft there is a steam capstan.

The cargo hold, heretofore described, has a capacity

© 1904 SCIENTIFIC AMERICAN, INC

of 12,500 tons of coal or 401,000 bushels of grain. The vessel is expected to carry from 10,000 to 11,000 tons of iron ore on an 18-foot draft. In her coal bunker, which is located in front of the boiler room, she will carry 350 tons of fuel. During the early part of May the "Wolvin" will take on a cargo of 12,500 tons of coal at Lorain for the head of the lakes, and will thereby break all cargo records of the Great Lakes. In order to accommodate this vessel at some of the lake ports, quite extensive harbor improvements would be necessary. It is probable that her lower lake destination this season will be at Conneaut, the "Carnegie port," where the giant automatic unloaders were first installed, and where they are found to-day in largest numbers.

Comfortable staterooms, social parlor, and dining-room for the owners of the "Wolvin" and their families are situated immediately under the pilothouse and texas. The officers' quarters are on the deck immediately below those of the owners. Alongside of the engine aft are the quarters of the engine-room officers. The kitchen, dining-room, and messroom for the crew are also in the after end of the ship.

The new vessel has quadruple-expansion engines, cylinders 18½, 28½, 43½, and 66 inches, and having a 42-inch stroke. All the propelling machinery is located in the after end of the vessel. There are two boilers, both of the Babcock & Wilcox type, using 250 pounds working pressure, and the steam is superheated. Mechanical stokers are used, which is in keeping with the policy that nothing that can be done by machinery shall be done by hand. The coal is first fed into hoppers, from which it passes on to traveling grates. The ashes are taken from a point at the rear of the boilers and thrown overboard by means of steam-driven elevators. The boilers are fitted with a system of induced draft.

The new freighter, aside from its size, will be striking in appearance among other vessels of the Great Lakes, in that it is painted yellow. The bodies of most lake freight vessels are black in color. The vessel is named for Mr. A. B. Wolvin, of Duluth, who was instrumental in having this great ship built.

The Commerce of the Siberian Railway.

The total distance from St. Petersburg to Port Arthur by the Russian Trans-Siberian Railway and the Russian lines in Manchuria is 5,913 miles, or practically twice the distance from New York to San Francisco. This is one of the numerous interesting facts about Russia and her railway and commercial systems presented in a monograph just issued by the Department of Commerce and Labor through its Bureau of Statistics, entitled "Commercial Russia in 1904." The publication, which occupies more than 100 large pages, discusses in detail present commercial and financial conditions in Russia and other subjects closely allied therewith. Area, population, railways, water transportation, methods of communication, agriculture, manufactures, commerce, and many other subjects of this character are among those discussed. Agricultural conditions, and especially Russia as a rival of the United States in wheat production; mining conditions, and especially Russia as a rival of the United States in mineral oil production; manufacturing conditions, and Russia as a possible competitor of the United States in the markets of the Orient for manufactures are discussed in detail.

Regarding the railways, which are a subject of especial interest at the present time, in view of present conditions in Russia and the Orient, the report says:

The importance of railways as means of communication is now greater than that of the rivers and other water routes, as is shown by accompanying tables. The building of the trunk lines, with the exception of the St. Petersburg-Warsaw-Vienna, built during the years 1845-1848 and 1853-1862, respectively, and the St. Petersburg-Moscow (Nicholas line), constructed between 1843 and 1851, dates back to the decade between 1860 and 1870. These years witnessed the construction of the entire group of railways, with Moscow as their common starting point, viz.: Moscow-Nijni-Novgorod (1861-62), Moscow-Voronezh (1862-1869), Moscow-Volodga (1862-1872), Moscow-Kharkov (1866-1869), with its branch to Kief (1868-1870), and Moscow-Warsaw (1866-1871). Next in point of time comes the construction of roads connecting the black-soil region with its natural outlets, the ports of the Baltic and Black seas: Riga-Tsaritsyn (1861-1871), Kief-Konigsberg (1870-1873), Libau-Rommy (1871-1874), and Samara-Viasma (1866-1871), all of which lead to the Baltic. Simultaneously lines were built connecting each one of the more important southern seaports with the agricultural provinces. Chief among them are: The Odessa line, with its branch to Yelisavetgrad (1867-1869), and its Bessarabian branch (1871-1874), Kharkov-Nikolaiev (1869-1873), Kharkov-Taganrog (1869), Voronezh-Rostov (1861-1876), and, finally, Kharkov-Sevastopol (1869-1875).

The Russo-Turkish war of 1878-79 caused an almost entire suspension of railway building. It was only during the decade beginning with 1880 that activity in this field was again resumed, but the character and method of construction of the newly-built roads changed abruptly. In place of the former trunk lines, connecting either the black-soil area with the seaboards of the Baltic, Azov, and Black seas, or with the central industrial region around Moscow, these years witnessed the construction of great strategic railroads, such as the Trans-Caspian, the Polessie system, besides roads primarily destined for the service of relatively small though important industrial regions (Catherine line, Ivangorod-Dombrovo). Moreover, the system of granting franchises (concessions) was superseded by the building and working of roads directly by and on account of the state. At the same time the redemption by the government of great railway systems was going on, so that for some time it seemed as if all private roads were going to be acquired by the state. Although of late greater latitude has been given to private initiative, by for the greater part of Russian railways is in the hands of the government. Out of 36,673 miles under the control of the ministry of communication on January 1, 1904, 24,436 are worked by the state, and 12,237 miles only by private companies.

The adverse years, 1891 and 1892, gave a new impetus to railways. "In order to give employment to the starving peasantry" the government undertook and encouraged the construction of new roads. A new era of railway building began with these years, which, in its vigor, soon surpassed anything seen not only in Russia itself but anywhere else in Europe. Thus, while during the above years the number of versts opened for traffic was but 123 and 419 respectively, the succeeding years mark the beginning of an exceedingly energetic expansion of the railway system, whose termination does not seem to be at hand even in the near future. According to official figures there were opened for traffic during:

Year.	Miles.
1893	1,043
1894	1,147
1895	1,277
1896	1,953
1897	1,190
1898	1,897
1899	3,297
1900	1,647
1901	2,235

These figures include roads built not only by the state, which has its hands full with the construction of the grand trans-Siberian railway, but also by corporations whose activity now almost surpasses that of the early years of the decade beginning with 1870, the first period of great railway coustruction, when the building of roads, for some time at least, became the monopoly of a few private companies. At present franchises are eagerly contested by competing corporations, a fact unheard of until recently in Russia, where the state, not so very long ago, had yet to guarantee the interest on the stock and bonds of the chief railroad corporations. The ministries of finance and transportation have, during the latest years, been literally swamped with petitions coming not only from railroad and construction companies, but also from representatives of "local interests," as mining, manufacturing, and agricultural groups. The length of Russian railways in Europe alone has thus considerably increased during the last ten years, and surpasses now that of France and Great Britain, respectively, being inferior only to that of Germany.

Simultaneously with the redemption of the greater part of Russian railways the government undertook the difficult task of regulating the railway tariffs for both passengers and goods. The principles adopted were those of the "zone" tariff, and the results of the innovation have been very encouraging, for both passenger and freight traffic have increased considerably since the introduction of the new tariffs.

The present state of the Russian railways, according to the recently published returns of the ministry of communications, is stated as follows: At the beginning of 1902 the total length of all Russian railways (exclusive of railways in Finland) was 35,187 miles, of which 28,982 miles were in European Russia, 5,138 represented the length of railways in Asia (exclusive of the Manchurian Railway), and 1,067 were secondary railways of local character. Of this total of over 35,187 miles, 23,557 miles, or over 67 per cent, were owned and operated by the government. The value of this system, exclusive of the local secondary roads, is given as 5,149,399,000 rubles, or about 99,000 rubles per verst. Of this grand total expended in the construction of railways the government's share is 4,914,805,000 rubles, or about 95 per cent. This amount includes the value of all corporate securities, both stocks and bonds, the income from which was guaranteed by the government, those of the bonds amounting to 2,920,428,000 rubles, which are held by the treasury, and the total amount of subsidies granted for the construction of railways.

For January 1, 1904, the length of the entire Russian railway system, exclusive of 1,944 miles of railroad in Finland and 1,555 miles of the eastern Chinese road, is officially stated as 36,673 miles. Of this total, 31,493 miles were in Europe and 5,180 miles in Asia. Of the European railways, the government operates 19,256 miles, while 10,954 miles of railway of general interest and 1,312 miles of railways of local interest were operated by private corporations. The total length of double-track roads was 6,830 miles. The length of miles opened for operation during the year 1903 was 446 miles. The total number of miles under construction was 3,931.

For the five years 1897-1901 the net earnings per mile of the American railways and railways in European Russia compare as follows:

	American railways.	Russian railways in Europe.
1897	$2,016	$1,789
1898	2,325	1,778
1899	2,435	1,705
1900	2,262	1,664
1901	2,854	1,493
Average	$2,378	$1,686

It is seen that the net average per mile earnings of the American railways for the period in question are over 40 per cent higher than those of the Russian railways. Still more unfavorable comparisons might be drawn if the financial accounts of the Russian railways were set side by side with the same accounts of European railways having a much larger density of traffic than the United States railways.

Engineering Notes.

An immense scheme of additional irrigation for the Punjab, costing 6½ crores of rupees, is being prepared, and in order to keep pace with what is being done, the government of India has sanctioned a second chief engineer for irrigation for that province.

A new type of automatic loom has been devised by two Burnley operatives. In this device all the features of the existing Lancashire loom are retained, and by the introduction of a hopper containing weft in steel tubes and some simple mechanism on the slay, an automatic loom is produced. When the weft thread breaks, the weft fork sets in motion mechanism which forces the old weft tube out of the shuttle at the top, a full tube immediately taking its place at the bottom.

Pulverized coal for combustion under steam boilers was the subject of a paper read at a recent meeting of the Western Society of Engineers, Chicago, by Mr. John M. Sweeney. According to the results of comparative trials cited by him, 9.4 pounds of water, equivalent evaporation from and at 212 deg. Fahr., were realized per pound of fuel with the pulverized coal and 7.5 pounds per pound of fuel with hand firing. On the basis of combustible the equivalent evaporation in the two cases was 10.47 and 8.4 pounds, respectively.

A record railroad run is to be inaugurated by the London and South-Western Railroad of England in connection with the recent decision of the American Steamship Line to make Plymouth instead of Southampton the port of call in their transatlantic traffic. The boat train of this company is to convey the passengers direct from Plymouth to London without a single schedule stoppage, a total distance of 230¾ miles, in 270 minutes. This will represent an average speed of 51.27 miles per hour, which considering the difficult nature of the track will be a commendable performance. Furthermore, it will constitute the longest railroad run without a stop in the world.

The famous Morris Canal in New Jersey is practically condemned in a report just rendered to Governor Murphy by ex-Governors Werts, Griggs, and Voorhees. The canal company was incorporated in 1824 and built this waterway soon afterward, from Phillipsburg on the Delaware River to Jersey City, a distance of 106 miles. A number of reservoirs were constructed, some of which are now summer resorts and surrounded by valuable estates. The State has a right to take the canal in 1974. It was leased in 1871 to the Lehigh Valley Railroad Company, which has since operated it. The eminent commissioners report that even were the property in perfect condition, it could not be operated at a profit. The decline in its value has been due to the construction of railways which became powerful competitors, carrying freight at cheaper rates than is possible with the canal boats except at a loss. Eventually all traffic was diverted from it except the trifling amount from the lessee. At the present time it stands in the way of needed public improvements, but its abandonment involves the untangling of a complication of interests, including the stockholders of the canal company, the lessee railroad company, the State, the municipalities along the route, the landholders about the reservoirs, and the people having contracts for important water rights, not to mention a lot of trifling claimants for consideration. While the abandonment is assured, it now appears that it will involve more trouble and delay than the original construction of this canal, once the pride of northern New Jersey.—Engineering Record.

© 1904 SCIENTIFIC AMERICAN, INC

Correspondence.

Prevention of Premature Firing of Big Guns.

To the Editor of the SCIENTIFIC AMERICAN:

Referring to the gun explosion on the battleship "Missouri" on the 13th instant, will inquire if it would not be a simple mechanical problem to design a device which would make it impossible to fire one of these guns until the breech was closed, similar in principle to the safety attachment on the handle of a Smith & Wesson pistol, which prevents the trigger being pulled until the palm of the hand grasps the handle?

GEORGE BRECK.

San Francisco, Cal., April 15, 1904.

[The latest types of guns are provided with a safety device for the purpose of preventing premature firing. The gun is fired by closing an electrical circuit, and the contacts are not in a condition to close until the breechblock is entirely screwed home.—ED.]

The Blondlot, or N-Rays.

In this laboratory we have obtained uniformly negative results in experiments on the Blondlot rays. Our experiments were made with the help of seven observers, including five doctors, one student, and one laboratory attendant. Calcium sulphide screens rendered fluorescent in a separate room by burning magnesium were employed. They were brought into an absolutely dark room in which the observers had been kept for some time. Two forms of screens were used:

(1) Flat screens on which a circular area on a slip of glass is covered by calcium sulphide.

(2) The later form in which a circular area at the back of the hemispherical lens is covered by calcium sulphide.

The screens were either held by the hands of the observers or were clipped on stands.

The observers were told first to look steadily at the screens and report any variation in brightness, calling out "bright," "dimmer," "dim," "brighter," etc., as the appearances seemed to change. Even with the screens on the slips of glass the observers after a few moments were able to call out the changes, *although there was no attempt at muscular contraction.* With the lens form of screen the changes in brightness were very marked.

We next attempted to find whether muscular contraction behind the screen caused an increase of brightness. Of course, where the observer sees a change in brightness without muscular contraction it is easy to be misled on this point. We made the observer continue to call out the degree of brightness, and we contracted the muscles of the arm behind the screens sometimes after he had called out "bright" and sometimes after he had called out "dim." In the great majority of cases the effect we looked for did not follow. In the few cases in which it occurred we naturally attributed the results to the changes in brightness which can be observed without any muscular contraction.

We next told our observers to look, as it were, into the distance beyond the bright spot, and to report on the brightness of the screens. When the accommodation of the eyes for the near vision was relaxed they reported without exception that the brightness of the screens was constant, and that muscular contraction made no difference.

When observers were then asked to touch the backs of the screens, thus warming them, they reported an increase of brightness.

It is not easy to explain the phenomena we have described. We believe that there is difficulty in accommodating for the fluorescent circle, and that there is a wavering movement of the ciliary muscles, and probably also a wavering in the size of the pupils. Yet it is asserted that we can focus a point of light in a dark room, and it is difficult to see why the fluorescent screen cannot also be kept steadily in focus when it consists of a flat glass slip with fluorescent circle. In the case of the later, and presumably more successful form of apparatus, the difficulty is easily understood. In that form the fluorescent rays proceed from the back of a hemispherical lens, that is, from a point within the posterior principal focus, and they are widely divergent and thus strain the accommodation of all but near-sighted people. The fact that in every instance we found that the light becomes steady after relaxation of the accommodation is very striking.

But the phenomena observed by us do not go any distance toward explaining the results described in M. Blondlot's papers. How is it that he and many of his compatriots see increase of brightness under conditions in which we see none? Is the explanation to be found in the paper by Heinrich, "Die Aufmerksamkeit und die Funktion der Sinnesorgane" (Zeitschr. für Psychologie u. Physiol. d. Sinnesorg., vols. ix. and xi.), in conjunction with our observations? Heinrich found after many careful experiments that the pupil dilates when attention is directed to an object situated in the field of indirect vision, and that it dilates still more during a short mental effort, such as a calculation. He found also that on directing attention to an object in the field of indirect vision the ciliary muscle relaxes, thus diminishing the curvature of the crytalline lens, and that during mental calculation this change is very marked, causing a curvature even less than that required for vision of a remote object. He found also that under the same conditions the axes of vision tend to become parallel or even divergent.

Can it be that the mental condition of some observers in a state of expectancy reacts on the intrinsic muscles of their eyes, and thus they see what they think they should see?

We have also experimented with the rays from a Nernst lamp, but without result.—Physiological Laboratory, the University, Glasgow, March 29. John G. McKendrick, Walter Colquhoun, in Nature.

TWO HOME MADE WIRELESS TELEGRAPH RECEIVERS.

Wireless telegraph receivers or "kumascopes," to adopt the name given them by Prof. Fleming, nearly all depend upon the principle of an imperfect contact in a local circuit being made better by oscillations generated by the Hertzian waves. Most of these kumascopes have an exceedingly simple form and can be constructed by any amateur. One of the simplest is that

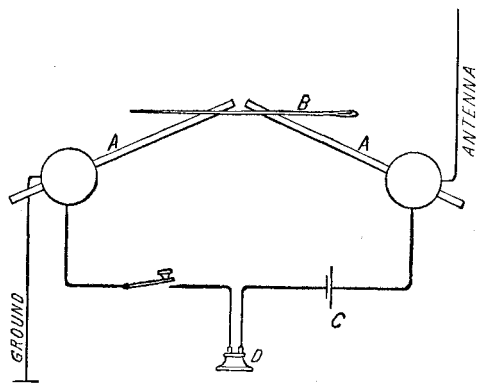

Fig. 1.

shown in Fig. 1, which only requires two binding posts, two pieces of No. 12 aluminium wire, and a large sewing needle. The wires *A* are supported at an angle with each other, as shown in the diagram, and across them lies the needle *B*. The kumascope is connected up in the usual way to a telephone receiver *D* and a local battery *C*. Care should be taken to make the battery sufficiently weak, for this is a very common cause of failure. A battery of suitable power can be made by filling a half-pint fruit jar half full of water and dissolving in the water a heaping teaspoonful of common salt. An electric-light carbon and an ordinary battery zinc rod may then be used for the electrodes. The kumascope may be used in connection with transmitting apparatus, such as that described in the SCIENTIFIC AMERICAN of September 14, 1901. The Hertzian waves sent out by the transmitter will be detected by the usual bubbling or buzzing noise in the telephone. In our diagram we have shown one of the binding posts connected with the ground, and the other to the antenna. This is necessary only where considerable distances are to be covered, but may be dispensed with where the transmitter and receiver are both located in the same room or building. The imperfect contact in this kumascope is due to the thin film of oxide which always covers the surface



Fig. 2.

of aluminium. The film is sufficiently thick to normally prevent the passage of the low-power current of the local circuit, but its conductivity is readily increased by the peculiar action of the electric surgings or oscillations set up in the aluminium wires by the Hertzian waves. The resistance of the oxide, however, is immediately restored when the oscillations cease, and the buzzing sound in the telephone is therefore due to the rapid variations in the battery current.

Another kumascope which will be found just as easy to make, and which gives equally good results, consists of two strips of copper or tin secured to a board, as shown, and having notches cut in their adjacent ends to form a seat for a carbon ball. The ball may be carved out of an electric light carbon and rounded off smoothly with a file. Connections with a telephone and local battery are made, similar to those described above. The imperfect contact between the carbon ball and the copper strips normally offers a great resistance to the current in the local circuit which is greatly lessened by the electric oscillations. It will be observed that both of these kumascopes are self-restoring, that is, they require no tapper or other mechanical device to effect decoherence.

Electrical Notes.

Some interesting experiments have been carried out in Milan with an electric street railroad car equipped with a single-phase alternate-current motor of the series laminated field type. This motor is the device of Dr. Finzi, and is designed for a frequency of 18 periods per second. The motor weighs 16 hundredweight. In this apparatus the ordinary series parallel controller is replaced by a transformer giving respective voltages of 80, 100, 120, or 140 volts as desired, when supplied with a current at 500 volts in its primary. The commutation proved highly satisfactory at starting loads, and under full voltage sparking was no greater than is the case with a good continuous-current motor. The commutator and brushes were examined after a run of 125 miles, and were found to be clean, and showed no signs of appreciable wear. The starting acceleration was not quite as good as that of a continuous-current motor, but was maintained constant longer, so that a car speed of 16 miles per hour was reached in the same time by both, the energy taken being 14.85 watt-hours per ton in the case of the continuous-current motor, as compared with 10.6 watt-hours per ton in that of the alternator.

The Kelvin Compass.—In the marine world the Thomson compass still holds its own, and its users apparently have not even yet got used to the change in name from Sir William Thomson to Lord Kelvin. We notice, however, that the most recent patent compass issued by Messrs. Kelvin and James White, Limited, bears the name of Lord Kelvin. The feature in connection with the design of this which calls for special attention is the improvement in the means of suspension, in order to secure a steady card in spite of the greater vibration due to higher speed in steamships. Another feature is the illumination of the compass at night entirely from the underside. This can be done either with electric light or by means of oil lamps. In either case adjustment in the intensity of the light is provided, as this has been found particularly useful when taking bearings from stars or other faint lights. A new form of helmet is now introduced having rifle sights upon the top. This helmet moves round freely in any direction, and bearings of the sun, lights, buoys, or other objects are taken instantaneously and read directly upon the compass card. Bearings by azimuth mirror in the usual way can also be taken by day or night without removing the helmet. These facilities for taking bearings smartly and conveniently are being greatly appreciated by shipmasters and navigating officers.

M. Routin, of Lyons, has devised an electro-mechanical governor which is described in a recent article by M. F. Brock in the Elektrotechnische Zeitschrift. The device consists of a solenoid, magnetized by a few series turns and a coil which is in shunt with the generator. The magneto-motive forces of the two windings are opposed, that of the shunt coil, however, predominating under normal conditions. The field switch, the valve mechanism and a rheostat in series with the shunt coil of the solenoid are mechanically connected to the armature of the solenoid. The last-named switch performs the function of securing the predominance of the shunt coil of the solenoid for any position of the latter's armature. Assuming additional load to be put on the generator, the armature of the solenoid will drop a certain distance, because the increased magnetomotive force of the series winding of the solenoid will, by more nearly balancing that of the shunt coil, diminish the strength of the electromagnet. In falling, the armature will have acted upon the valve gear, at the same time cutting out resistance from the field circuit of the generator as well as from the circuit of the shunt coil of the solenoid. If load is taken off, the action is reversed and the armature is drawn higher up into the solenoid, and if a short circuit takes place the series coil largely predominates, the armature is drawn right up and steam is shut off. If the fuse blows in the generator circuit, the same thing occurs, the shunt coil now being responsible for this.

The Current Supplement.

The article begun by Frank C. Perkins, in the last number of the SUPPLEMENT on the "Development of the Electric Mining Locomotive," is concluded. Some well-known foreign and American locomotives are described and illustrated. "Electrolytic Rectifiers for Charging Storage Batteries," is the title of a very instructive paper. Dr. G. Erlwein begins an admirable discussion of the "Purification of Potable Water by Means of Ozone." Mr. Hiram Percy Maxim's very thorough study of the cost of operating automobiles for commercial purposes is concluded. Assistant Naval Constructor Gleason writes instructively on the steam turbine. Mr. Charles H. Stevenson has much that is of value to write on the menhaden industry. How an automobile can be run on a railway track is a subject that is well illustrated in the current SUPPLEMENT, No. 1478. The usual electrical, engineering, and consular notes will be found in their accustomed places.

© 1904 SCIENTIFIC AMERICAN, INC

THE MANUFACTURE OF INCISED, OR CUT GLASS.

GLASS is a singularly versatile material, at once refractory and yielding, yet lending itself to use in thousands of ways. It is as a means of artistic expression that it is chiefly interesting, for its utility is beyond all question. The iridescent chatoyant colors of antique glass—Nature's destructive action—do not distract us from the charm of perfect form. Venetian glass, the beautiful product of the lagoon-island of Murano, is so very impracticably fragile, that even its possession is a care. Probably glass would have remained in a rather humble position, if it had not been that a Bohemian glass-worker more than two hundred years ago conceived the idea of a new invention, which was destined to change the glass product of the world. He thought of making the heavy "flint" or "lead" glass larger as regards the dimensions of the walls of the article, in order that he might have more stock to work on, so that he could deeply incise, or cut the glass to form patterns, the sides of the rough cut being in turn polished to give the effect of a many-faceted jewel. The success of the new *objet d'art* was not immediate, and it was only when the crude designs and imperfect workmanship of the earlier cutters gave way to the labors of highly-skilled artisans directed by talented designers that cut glass, or "art glass," as we might term it, took the place to which its great beauty entitles it. It is to America that we must look for the perfection, and the superiority of design and skillful workmanship of this branch of the industry. There is no such thing as absolute interchangeability in the glass-cutting establishment, and the artistic bent of the various cutters is encouraged. For purposes of illustration of this interesting industry, we have selected the plant of the Libbey Glass Company, of Toledo, Ohio, as being the best exponent of this really American industry.

Blowing a Glass Blank

Glass is a peculiar product, having as a base silica, which is fused with alkalies and metallic oxides to form a hard transparent substance which we all know as "glass." It can be wrought in various ways, and is susceptible of a high, and, when properly cut, a lasting finish. There are a number of varieties of glass, composed of varying ingredients, but we need only concern ourselves with lead glass, used for decoration by incision, or the cutting away of portions of the reinforced wall so as to form an ornate pattern. The raw materials consist of a sand, so called, of exceptional quality as regards sharpness and color. It is not a sand in the ordinary sense of the word, but is a quarried rock which has been crushed. This accounts for the uniformity of its color, which is so necessary in producing a steely-blue white glass, which is to be used for giving the prismatic colors caused by the cutting process. The red lead, saltpeter, and sodium carbonate are accurately mixed with the sand, and a small percentage of white arsenic or manganese is added to bleach or clarify it. The proportion is varied ac-

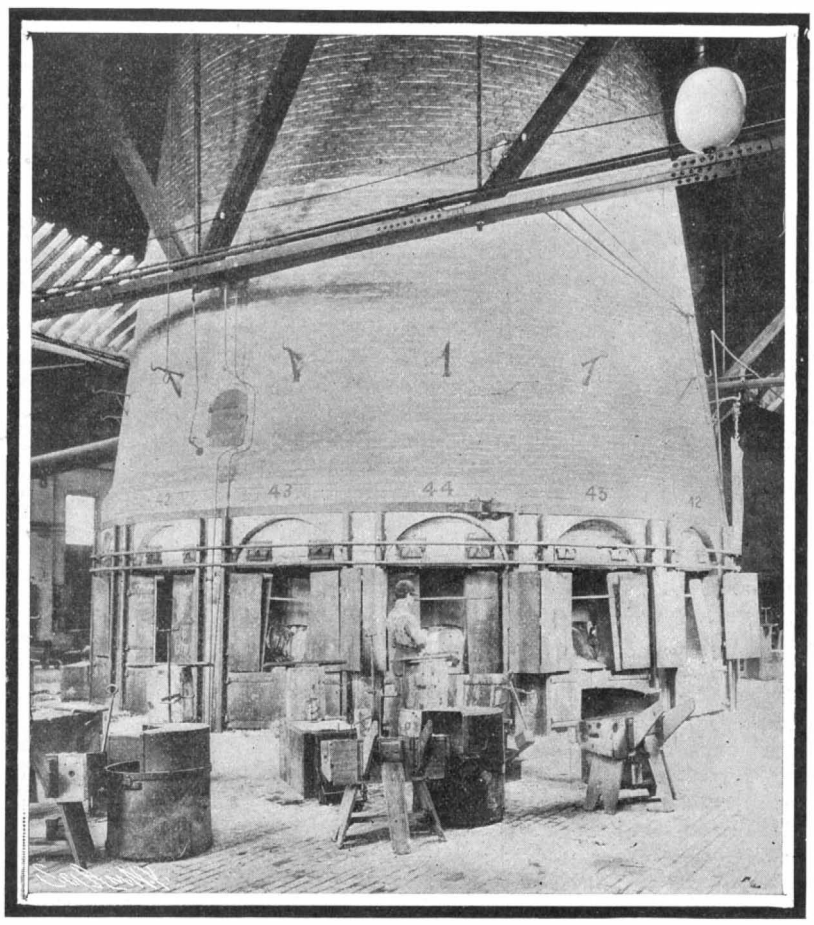

A Glass Furnace.

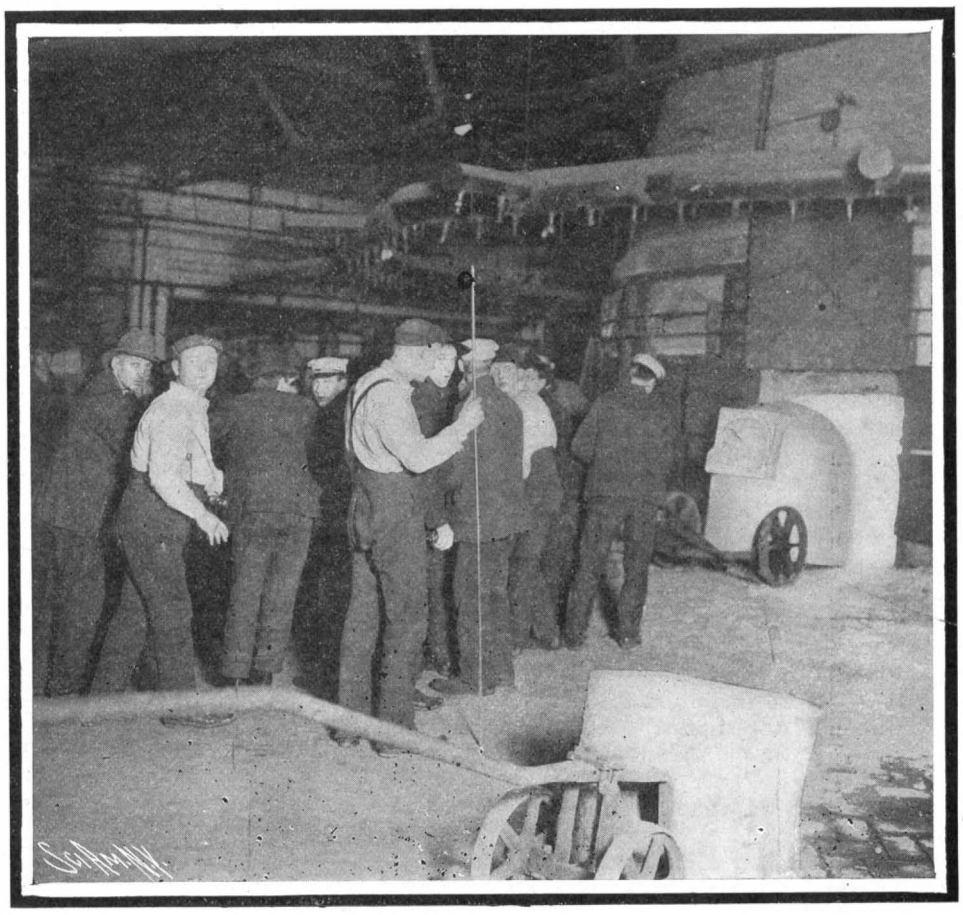

Setting a White-Hot Melting Pot.

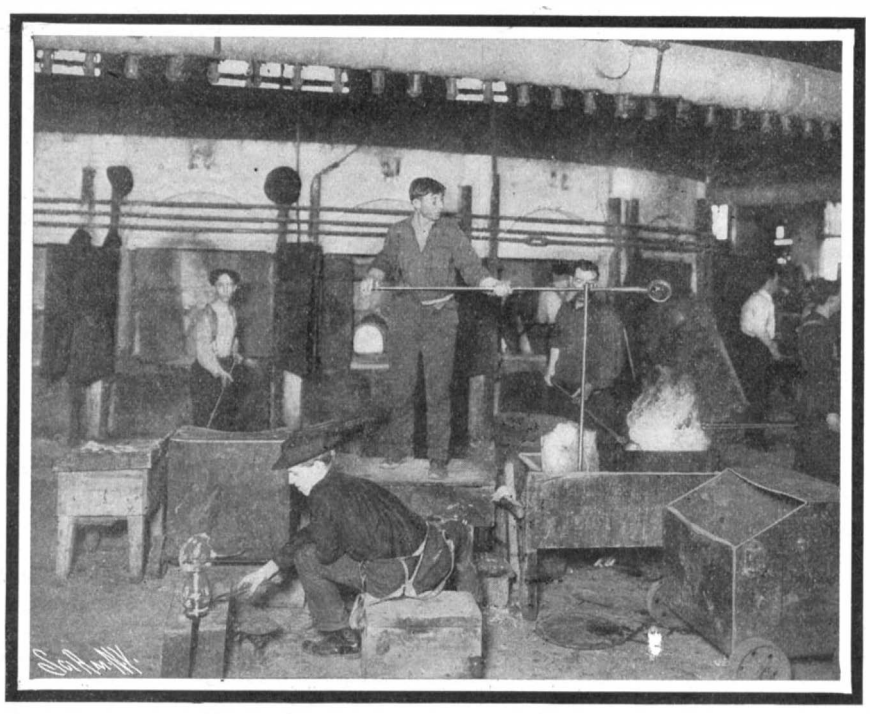

Blowing Glass Articles.

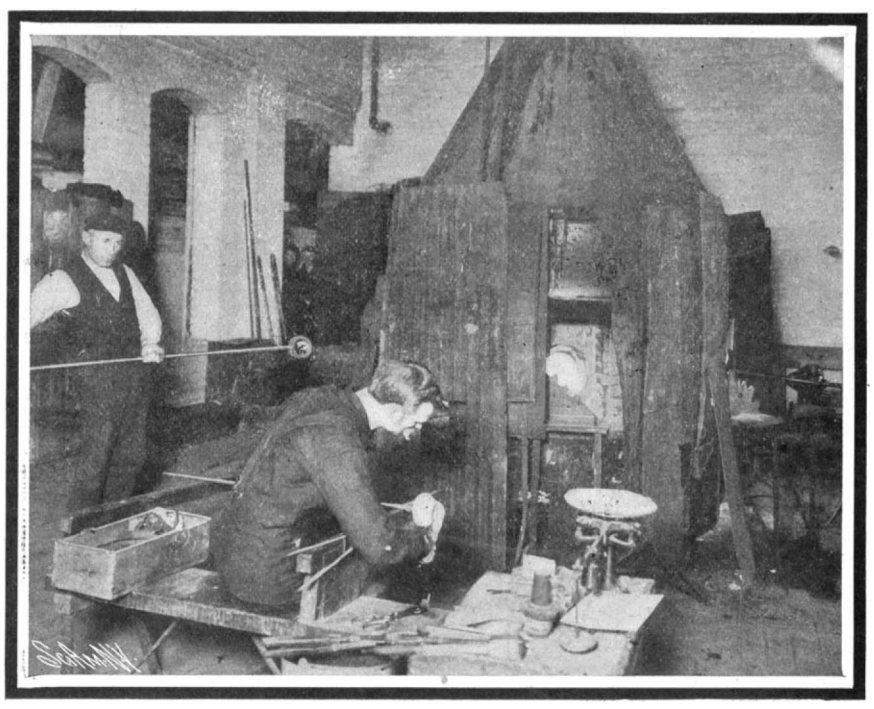

Forming a Glass Article.

THE MANUFACTURE OF INCISED, OR CUT GLASS.

© 1904 SCIENTIFIC AMERICAN, INC

cording to the nature of the finished product. A glass furnace is a large round or oval fire-brick oven, capable of holding an aggregation of melting pots, which rest on a floor in common under a dome called a crown. These pots are made of unbaked fire-clay. A mouth gives entrance for the raw material and the workmen's blowpipes, to which the molten glass adheres. A furnace may contain as many as sixteen pots arranged radially on the floor of the furnace. They are heated before setting, and are subsequently filled with about 1,600 pounds of raw material, which soon melts at a temperature of 2,500 deg. F., caused by the intense flame of gas and air, which is deflected from the dome downward, the products of combustion passing out through a stack.

The glass gatherer receives his order for a specified size and shape for his article; and after obtaining a sample to guide his memory, takes his iron blowing-tube, and collecting sufficient of the molten glass from the pot in the furnace, rolls it to and fro on a metal plate to produce a uniformity of distribution of the mass, which is then reheated in a furnace called a "glory-hole." He then turns it over to a glass blower, who takes the pipe and blows the article to approximately its final shape. It is then reheated and given definite form and finish by the most expert workman of all three. The tender glass must now be annealed or tempered to equalize the strains, otherwise the piece would break. It is then placed in kilns or tempering ovens, where it is first reheated and then gradually cooled.

The heavy uncut articles are then ready for the cutting operation, by which they lose considerable weight. In some cases the loss is one-third. The cutting operation really consists of three stages. The article is first roughed with sand and a steel grinding wheel. It is then smoothed by a stone cutting wheel, and is lastly finished by a wooden polishing wheel. A workman holds the article against the conical edge of a steel wheel secured to a shaft driven by belts and pulleys. Fine sharp clean sand and water are allowed to drip on the wheel from a cone-shaped bucket. The article is pressed against the rapidly-rotating wheel, and is deeply scored or cut. The heaviest and principal lines in the pattern are roughed-in by these steel wheels and the sand. In order that all articles may stand level, the bottoms are ground on a horizontal grinding wheel, sand and water still being used. The roughed article is now ready for the wet smoothing stones, which resemble steel wheels both as to size and edge, but no sand is used; these wheels follow the cuts that the steel wheels have made, and also cut in the finer lines of the pattern. The practically finished piece is now ready for the polisher, whose rouge-charged wheels are of wood, their size and edge being the same as those of the steel and stone wheels, and therefore adapted to follow every line with almost mathematical accuracy. We have now the finished piece, which may grace a table or which may adorn the buffet of the White House. While cut glass is made abroad, the examples lack shape and depth and uniformity of cut. For this reason American cut glass forms an object of export, and the examples of art in this glass which will be exhibited at the St. Louis Exposition will be a revelation to most visitors.

The Romans and the Orientals were fond of both the cameo and the intaglio processes of engraving, and they had a peculiar combination of both which we now designate as "rock-crystal engraving." This is a long and expensive process, but the superb and highly artistic results fully warrant the expenditure of labor. The somewhat formal and mathematical lines give way to floriated designs, or free rein is given to the plastic fancy by the possibility if not the ease of modeling. The sculptor in his studio adds clay while he is working at his bust or group, while his marble-worker cuts off the marble to attain the same effect, in one case addition and in the other subtraction—the glass engraver does both. This

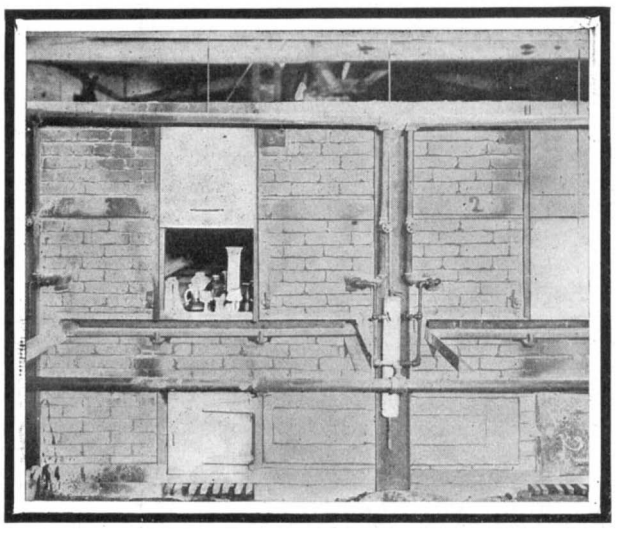

The Tempering Furnace.

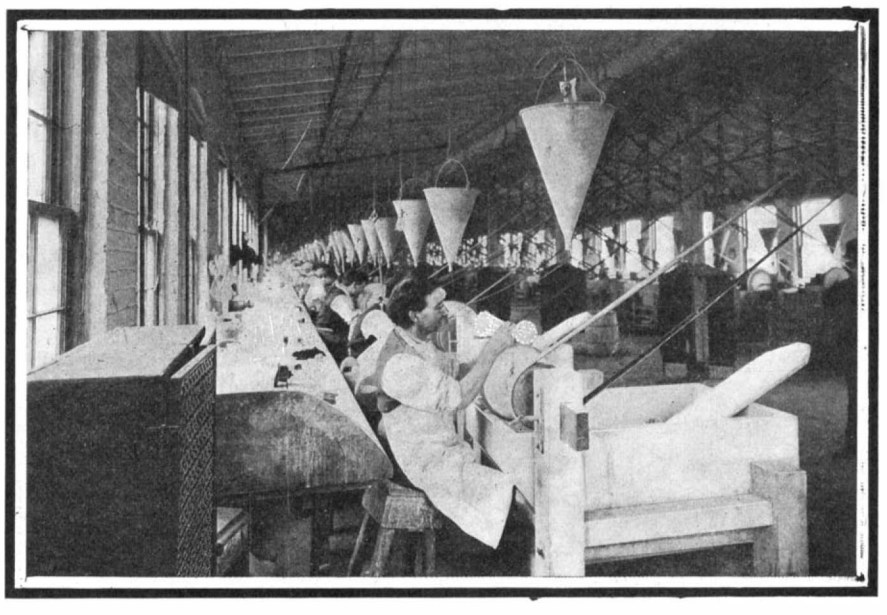

Polishing the Cut Glass.

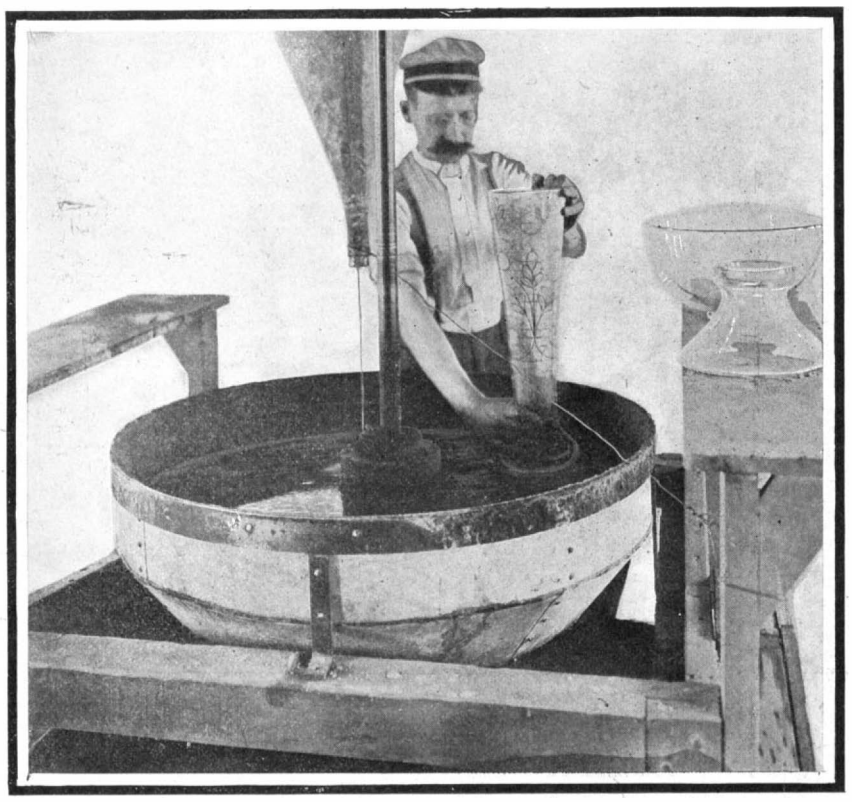

Grinding the Foot of a Vase.

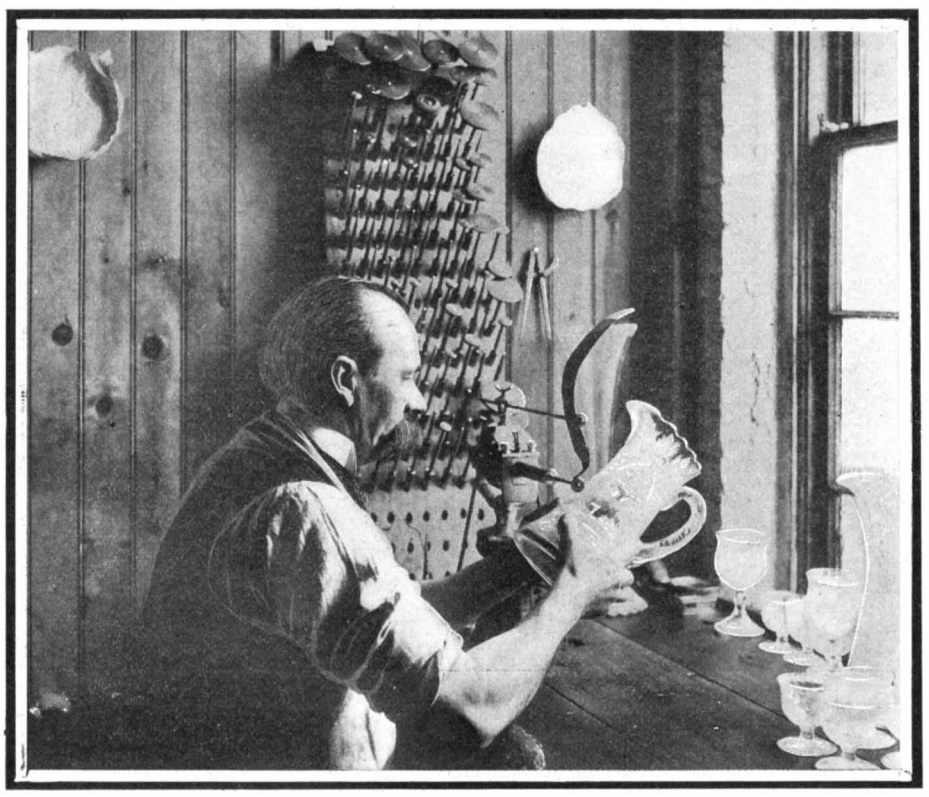

Engraving Glass.

Design Roughed in. Design Polished.

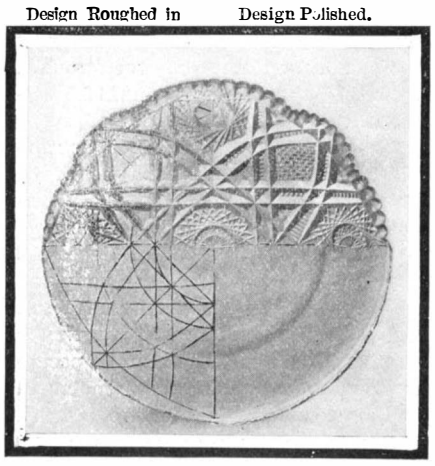

The Pattern. The Blank.

A Cut Glass Plate.

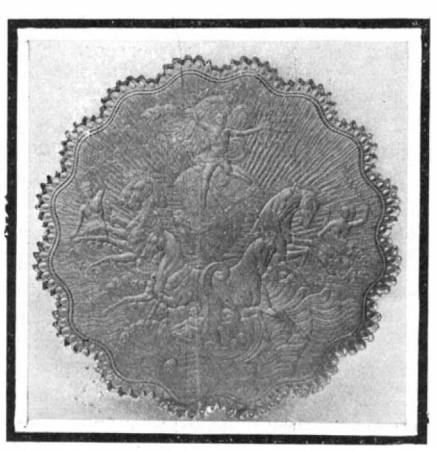

An Engraved Plate.

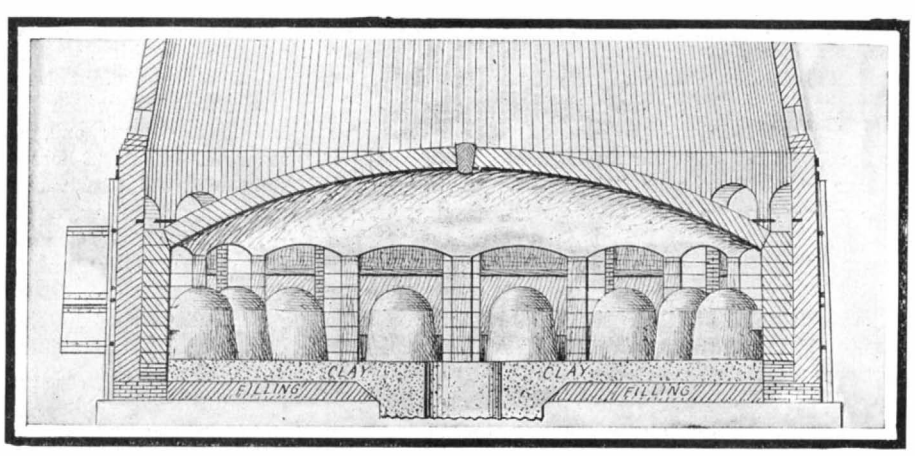

A Glass Furnace, Showing Melting Pots.

THE MANUFACTURE OF INCISED, OR CUT GLASS.

© 1904 SCIENTIFIC AMERICAN, INC

style of glass art work is also carried on by the Libbey Glass Company. The engravers use copper disks of various diameters and thicknesses. The steel spindles carrying the disks are secured to a rapidly-rotating polishing head, the copper being charged with olive oil and emery powder. The tools are changed as often as necessary to obtain the desired effect. Both smooth and matt surfaces may be produced, or delightful combinations can be made of them. The cut glass industry certainly has a bright future in this country.

THE AUTOMOBILE AND MOTOR-BOAT RACES AT NICE AND MONTE CARLO.

BY THE SCIENTIFIC AMERICAN'S SPECIAL CORRESPONDENT.

Interest in the annual automobile speed trials at Nice was increased this year because of the motor-boat races in the Bay of Monaco, which were run off a few days later in connection with an exhibition of this new type of speedy craft.

The automobile speed trials were held on the first day of April, and were carried out without accident and with a considerable lowering of existing records. These trials took place on an extension of the Promenade des Anglais, and the road, while not so straight or smooth as the cement road of the Promenade, was not bad enough to prevent the breaking of records.

Last year the Serpollet steam racer swept all records away and won for the third time (and thus permanently) the original Rothschild cup for the flying kilometer, in 29.19 seconds. A new cup was immediately donated by Baron de Rothschild, and was won for the first time last year by Hieronymus on a Mercedes car in 31.66 seconds. This, the best time previously of a gasoline racer in the Nice speed trials for the flying kilometer, was cut this year to 23 3-5 seconds by Rigolly on a 100-horse-power (nominal) Gobron-Brillié car. This new time for the kilometer corresponds to a speed of 152.54 kilometers, or 94.70 miles, an hour, which is an increase of 24.37 miles an hour in the rate of speed over that attained last year by Hieronymus on the 60-horse-power Mercedes. When the fact is taken into consideration that this much faster speed was attained on a poorer roadbed than that on which last year's records were made, one can readily see that there has been not only a considerable increase in the power of the machines, but also an increase in skill in guiding them. The sensations of going at a 95-mile-an-hour gait in an open automobile are graphically portrayed by Rigolly in the following words: "I felt I was traveling very fast—faster than at Ostend; but I was quite unable to judge the pace. I saw nothing of the road but a white ribbon which I did my best to follow in the middle. The only real sensation of my speed was the impression that my head was coming off—was being torn backward by a furious wind. I was in great need of a support, such as photographers employ." Asked if he could have maintained such speed for half an hour, he replied that the strain on his eyes and neck was so great that he did not believe anyone could keep up such a pace for 20 kilometers. Despite the fact that the machines, throwing up clouds of dust, all traversed this curving "ribbon" of road, whose surface had numerous small holes and hummocks, and which was lined on both sides with sightseers, not a single accident marred the events of the day.

These began with the mile speed trials from a standing start, which were opened at about 2:30 P. M., by a motor bicycle. Tamagni, on an Italian, 5-horse-power, twin-cylinder Marchand machine, won in 1 minute, 7 2-5 seconds, averaging a speed of 53½ miles an hour. A 5-horse-power Griffon machine was second in 1 minute, 9 seconds. The previous world's record for this event was 1 minute, 13 4-5 seconds, held by a Griffon machine.

There were eight huge racing cars in the speed trials, two of which were 100-horse-power Gobron-Brillié machines; one, a new 100-horse-power Napier racer; and four, 80-horse-power Mercedes racers. The Gobron-Brillié cars won all the trials, and tied each other in the mile from a standing start, which they covered in 53 3-5 seconds. The older of these two machines, driven by Duray, is fitted with three speeds, while the new car, driven by Rigolly, has four. This gave Duray an advantage when there was but a short distance in which to start, or in starting from a standstill. Four Mercedes machines made the next best times to the Gobron-Brillié's in the mile from a standing start, the first of these, driven by Werner, making it in 57 4-5. Mark Mahew, on his Napier, was seventh in 1 minute, 3 seconds.

The great events of the trials were the flying kilometer tests for the second and third Rothschild cups, which can be competed for by machines with explosive motors only, and by machines of any motive power, respectively. The weight of the machines in both instances must not exceed 1,000 kilogrammes (2,204.6 pounds). A distance of 600 meters (656.4 yards) was allowed in which to get up speed for these flying kilometer trials. The one for the second Rothschild cup was won by Rigolly in 24 seconds, with Duray second in 26 3-5 seconds, and Mark Mahew third in 28 3-5 seconds. Three out of the four 80-horse-power Mercedes cars finished next in 29 2-5 seconds, the fourth covering the 6-10 of a mile in only 2-5 of a second longer time. Although the Mercedes cars were beaten, they nevertheless showed their great uniformity by making such an even performance.

It was in the trials for the third Rothschild cup that Rigolly broke all records. Mark Mahew, on his Napier, flashed by first at 82.24 miles an hour. His time for the kilometer was 27 1-5 seconds. Hardly had the roar of his machine died away when sounds like those of a rapid-fire gun of large caliber were heard in the distance. One had barely time to guess what machine it was, when a huge racer with boat-shaped prow flashed by and was hid in a cloud of dust. The car jumped and bounded on the rather rough road in a most startling manner. But it was past before one could realize one's danger should anything go wrong. The spectators expected that a new record had been created, and cheered vociferously. Rigolly's machine covered the kilometer in 23 3-5 seconds, or at a 12½-mile-an-hour faster rate of speed than that attained by the Napier. The other Gobron-Brillié was second in 25 1-5 seconds, and the times of the Mercedes machines were 29, 29 1-5, 29 3-5, 29 4-5, and 30 2-5 seconds respectively. The Mercedes, which we illustrate, driven by Werner, was fifth in 29 1-5 seconds.

The Gobron-Brillié machines have been manufactured in France for a number of years past, and a full description of them will be found in the SCIENTIFIC AMERICAN for December 28, 1901. Their great peculiarity is the employment of a double piston motor in which the explosion occurs between the two pistons, driving them apart. The four-cylinder motor used on the present car has eight pistons. The casings on top of the cylinders cover the piston rods and the connecting rods which extend down to the crank shaft. The positive fuel-feed device which has been used heretofore has, we understand, been now abandoned for an

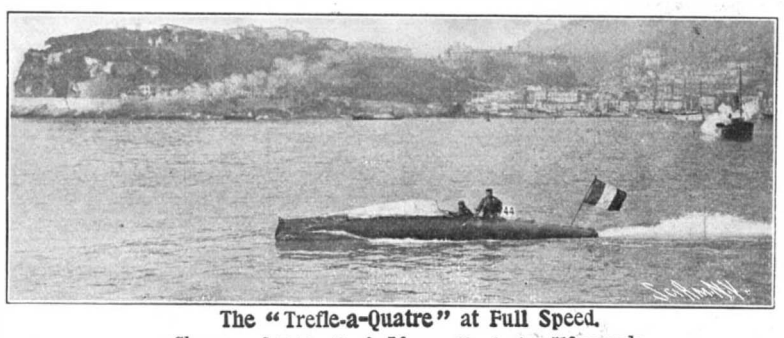

The "Trefle-a-Quatre" at Full Speed.
She covered 124.2 miles in 5 hours, 16 minutes, 51⅘ seconds.

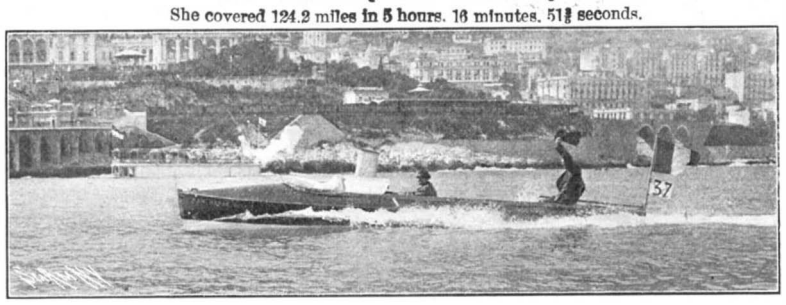

"La Rapee III." Winning the 93.15-Mile Race in 4 Hours, 30 Minutes, 22 1-5 Seconds.

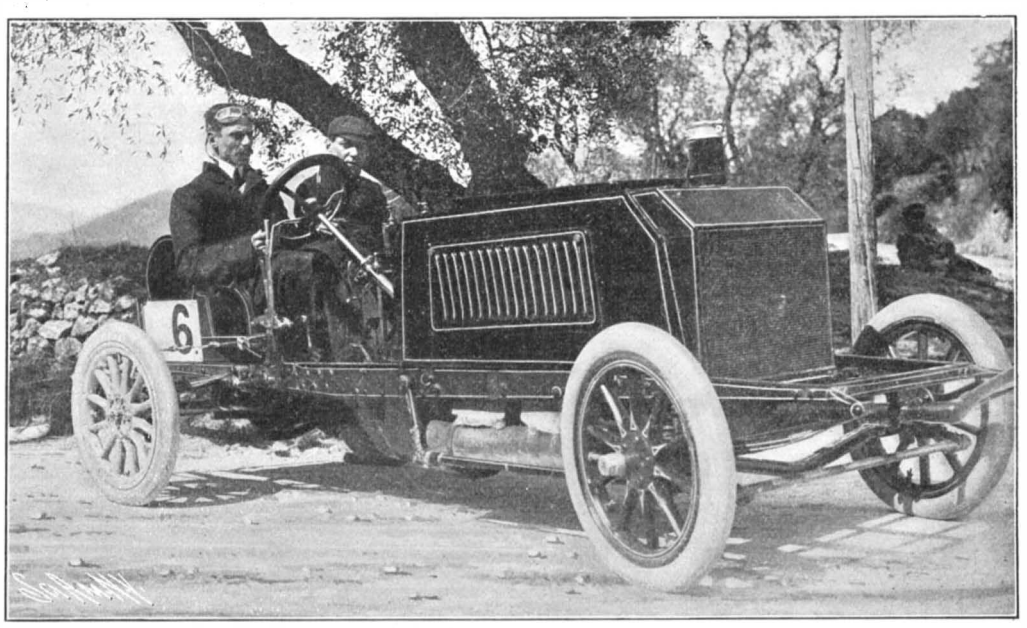

Lieut.-Col. Mark Mahew on His 100-Horse-Power Napier Racer.
Record: One mile from a standing start in 1 minute, 3 seconds. One kilometer with a flying start in 27⅕ seconds. (Third place.)

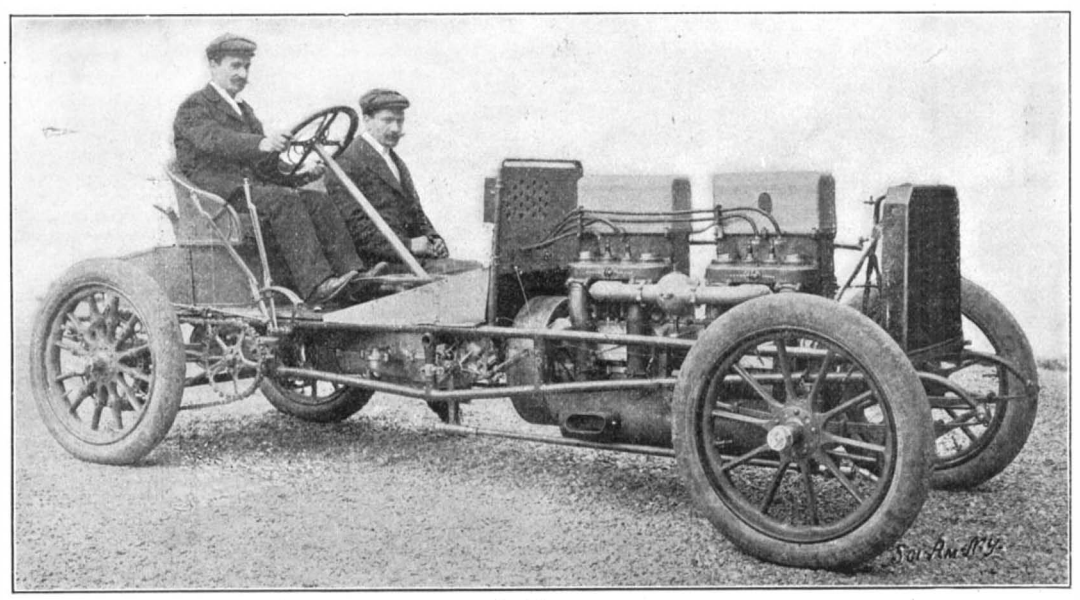

Rigolly on His 100-Horse-Power Gobron-Brillie Racer.
Record: One mile from a standing start in 53⅘ seconds. One kilometer with a flying start in 23⅘ seconds.

Werner on an 80-Horse-Power Mercedes Racer.
Record: One mile from a standing start in 57⅘ seconds. (Third place.) One kilometer with a flying start in 29⅕ seconds.

THE AUTOMOBILE SPEED TRIALS AND MOTOR-BOAT RACES AT NICE AND MONACO.

© 1904 SCIENTIFIC AMERICAN, INC

automatic carbureter. The Gobron-Brillié motor was one of the first to be adapted to the use of alcohol for fuel. The motor on the record-breaking racer is said to develop in reality nearly 130 horse-power.

All three of the machines illustrated are prospective contestants in the Gordon Bennett Cup Race to be held in Germany in June.

The last event of the day was the third annual hill-climbing contest for the De Caters cup. This cup was first won by Serpollet in 1902, the contest being that year held over a kilometer course on the long Nice-La Turbie hill on the Corniche road, and Serpollet's time being 59 seconds. Last year the test was made over a like distance on Laffrey hill, and Rigolly, on the same Gobron-Brillié machine which Duray is driving this year, cut nine seconds off Serpollet's record. The test this year was over a 500-meter (547-yard) course on the Nice-La Turbie hill, which has an average gradient of about 10 per cent. Duray, on the three-speed machine that won last year, won again this time in 26 seconds, Rigolly, on the four-speed Gobron-Brillié, taking one second longer. Werner, on the 80-horse-power Mercedes, was fourth in 28 seconds. Another Mercedes came in fourth in 28 3-5 seconds, while the Napier racer took fifth place in exactly half a minute. Fletcher and Jenatzy, on Mercedes cars, made a dead heat in 30 1-5 seconds.

The motor-boat races, which were sailed over a hexagonal course 12.5 kilometers (7.84 miles) in length in the Bay of Monaco, began on April 5 with a 150-kilometer (93.15-mile) race for the large, powerful racing boats less than 8 meters (26¼ feet) in length and having a total cylinder capacity less than 7.5 liters (457.66 cubic inches); and with a 60-kilometer (37¼-mile) race for the smaller cruising launches less than 6.5 meters (21.32 feet) long and with a cylinder capacity of less than 2.5 liters (152.55 cubic inches). A special traveling crane conveyed the boats from the exhibition space to the water's edge, and laid them upon a long incline running out into the water, down into which they were readily slid.

The 150-kilometer race was won in 4½ hours, 22 1-5 seconds by "La Râpée III.," a 7.98-meter (26.18-foot) boat built by Tellier and fitted with a Panhard & Levassor, four-cylinder, 35-horse-power motor having a cylinder capacity of 7.363 liters (449.30 cubic inches). The "Princess Elizabeth," which came in second in 5 hours, 18 minutes, and 4 seconds, is exactly the same type and length of boat, and is fitted with a four-cylinder Delahaye motor having a cylinder capacity of 7.443 liters (454.186 cubic inches).

Out of seven racers and six cruisers which started, only three of the former completed the race, while five of the latter succeeded in finishing. This shows that the ordinary launch with an engine of moderate horse-power is much more reliable than the light racing shell propelled by a high-power motor and generally termed an autqmobile, or motor, boat.

The winner of the 200-kilometer (124.2-mile) race—the "Trèfle-à-Quatre"—as well as "La Râpée III.," are shown in the photographs taken during the race. An idea of the fine lines of these boats can be had by noting the bow wave, which is so thin as to be quite transparent, the waterline of the boat being readily seen through it. The "Trèfle-à-Quatre" is fitted with a Georges Richard-Brazier four-cylinder motor. Its time for the 200 kilometers was 5 hours, 16 minutes, 51 3-5 seconds.

The motor-boat races were carried out successfully and with but one serious accident. This happened to the "Parisienne II.," a very long racer equipped with three motors of about 70 horse-power each. This boat caught fire from a gasoline leak, and the gasoline in her tanks made a furious flame. The three men of the crew escaped by jumping overboard, and two of them were badly burned. As the boat had a steel hull, it was not destroyed, although the engines were ruined.

There are said to be 42,000 locomotives in this country, and of these about 3,200 are supplied with electric headlights, while 1,650 are equipped with acetylene generators. The remainder of these engines are making use of oil for the headlight illuminant.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

PRINTING-TELEGRAPH RECEIVER.—J. D. WHITE, 50 Clanricarde Gardens, London, England. The present receiver differs in various ways from a simple form of printing-telegraph receiver and one more complex described in two former patents granted to Mr. White. The mechanism is operated by an electro-mechanical device by which the rotation of the type-cylinder is effected by currents of one polarity sent along a single wire, while the other cylinder is operated by currents of the opposite polarity sent along the same wire; but the operation is not limited to this particular device. It may also be operated by any of the other electro-mchanical devices used in receivers to rotate type wheels and to effect printing.

RELAY-MAGNET.—W. PALMER, JR., Rincon, New Mexico. The object in this case is to provide a simple and practical relay-magnet of a kind designed to enable the current from a local battery to be directed at will through either one of two electromagnets by merely reversing the polarity of the current on the main line at a remote point.

MEGAPLEX RELAY.—R. A. ENGLER, Dubuque, Iowa. In Mr. Engler's invention the improvement relates to relays, and more particularly to a type of relay for increasing the effect of feeble currents—such for instance, as are employed in telephony. The structure is such as to increase the effect in various ways, and especially to permit several distinct devices to act cumulatively.

Hardware.

SASH-FASTENER.—J. A. LONG, Spokane, Wash. In this patent the invention relates to a device for securing the meeting-rails of an ordinary window-sash that operates in a vertical direction. One object is to provide an improved form of sash-fastener that will engage the under face of the upper-sash rail and not be dependent upon the means of securing one portion of the sash-fastener to said rail. Another, to provide an improved form of device that will securely hold the rails together and prevent unauthorized operation of the window-sash.

WIRE-FENCE TOOL.—J. A. MILLER, Avondale Col. In the present case the invention pertains to tools employed in the erection and repair of wire fences, and has for its object to provide a tool of that character having details of construction that adapt it for efficient service as a wire-stretcher and a staple-pulling implement.

LEVEL, PLUMB, AND INCLINOMETER.—J. HAPPLE, Cleveland, N. Y. The purpose in this instance is to provide details of construction for a device which adapts it for convenient and reliable service to determine if an object or surface that may be fixed or movable is plumb, level or inclined, and define the degree of inclination or deviation from a perpendicular or horizontal plane.

SASH-LOCK.—C. W. RANDALL, Lockport, N. Y. In this lock the object in view is to provide a device which may be applied to one of the meeting-rails of a pair of sashes, said device serving to hold the sash or sashes in adjudged positions for preventing rattling thereof under the pressure of wind, the device being readily adjustable to sashes of different thicknesses in order that it may be used generally on different sizes and styles of sashes.

Household Utilities.

SAD-IRON.—M. JOYCE, Salt Lake City, Utah. To enable this iron to compete commercially with cheaper irons, the inventor casts the body in one integral piece, with guide-lugs projecting upward therefrom, and provides a wooden handle with a metallic connection-plate adapted to lie between the lugs of the iron-body and separated from the handle by a non-conducting shield, said plate having a stop-bar and a spring-dog connected with a headed pin or screw fastened on the upper side of the iron-body. The invention relates to irons of the type disclosed in two prior patents granted Mr. Joyce.

BED-COVERING.—E. W. BROWN, New York, N. Y. Mr. Brown's invention relates to coverings for beds, couches, cribs, and cots. His improvements enable the bed-clothing to be fastened in place easily and quickly so that the covering cannot be "kicked off," thus affording protection to the sleeper. Covering may be suspended in elevated position and in a way form a drapery, which depends from the suspended covering to the sides and foot end of the bed, thus keeping from coming in contact with the person, while protecting from drafts.

Of General Interest.

SELF-LOCKING TACKLE-BLOCK.—J. O. WALTON, Boston, Mass. The present invention consists in a simple guard combined with or formed on the block on its rear side just behind the cramping-pulley, so that the run of this part of the rope will be thrown laterally away from the cramping-face on the rear side, but will not interfere with the locking of the rope on the front side. A self-locking pulley-block has been shown and described in a former patent granted to Capt. Walton.

WINDOW-CLEANER.—J. C. G. FRITZ, New York, N. Y. The object of the invention is to provide a window-cleaner more especially designed for use on windows of locomotive-cabs, platform-windows of street-cars, and other vehicles and arranged to permit the engineer, motorman, driver, or other person to keep the outlook-window perfectly clear from frost, moisture, dirt, and the like and permit at all times a clear view of the path in front of the vehicle to avoid collisions.

NON-REFILLABLE BOTTLE.—W. C. BEAL, Fernandina, Fla. In this patent the improvement refers to a class of liquid-packages that are provided with means to expose or prevent the reuse of the receptacle after the contents have been removed, and has for its object to purovide novel details of construction for a bottle and its closure which will effectively prevent the refilling of the bottle after the contents have been partially or wholly decanted.

GARMENT-SUPPORTER FOR MEN.—W. A. WRIGHT, New York, N. Y. The purpose in this case is to provide a form of garment-supporter especially adapted for use in connection with trousers and so constructed that it will include a button or stud to receive a suspender-end, a member for supporting engagement with a pair of trousers, a member, if so desired, adapted to prevent the upward movement of a belt, and a member whereby to apply the device to the inner face of the trousers waistband.

STEERING AND STEADYING MECHANISM FOR BOATS.—W. H. YOUNG, Troy, N. Y. In this patent the invention has reference to improvements in steering and steadying mechanism for marine vessels, the object in view being the provision of a simple means whereby the boat may be easily steered and also prevented to a great extent from rocking and pitching.

CIGARETTE OR CIGAR BOX.—A. G. PSIAKI, New York, N. Y. The present invention has reference to improvements in cigarette or cigar boxes of the kind in which cigarettes or cigars are originally packed for sale; and an object is to provide a box of novel construction and having a receptacle for holding matches furnished with each package.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 5438.—For makers of armatura core punchings in sheet metal, of the ring type.

AUTOS.—Duryea Power Co., Reading, Pa.

Inquiry No. 5439.—For clocks for a factory, which are electrically controlled from one master clock.

For hoisting engines. J. S. Mundy, Newark, N. J.

Inquiry No. 5440.—For the makers of the "Merritt" typewriter, or dealers in repair parts therefor.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 5441.—For parties engaged in the manufacture or designing of clock cases.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 5442.—For manufacturers of light wooden and metal specialties.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 5443.—For manufacturers of vulcanized fiber specialties.

American inventions negotiated in Europe. Wenzel & Hamburger, Equitable Building, Berlin, Germany.

Inquiry No. 5444.—For manufacturers of machines for turning and boring hub blocks.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway New York. Free on application

Inquiry No. 5445.—For manufacturers of balloons.

Fine machine work of all kinds. Electrical instruments a specialty. Models built to order. Page Machine Co., 812 Greenwich Street, New York.

Inquiry No. 5446.—For woodworking machines for such work as dowels, skewers, etc.

The largest manufacturer in the world of merry-go-rounds, shooting galleries and hand organs. For prices and terms write to C. W. Parker, Abilene, Kan.

Inquiry No. 5447.—For manufacturers of heavy corded webbing.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Refrigerating Machine Company. Foot of East 138th Street, New York.

Inquiry No. 5448.—For machinery for making earthenware water pipes.

In buying or selling patents money may be saved and time gained by writing Chas. A. Scott, 340 Cuttler Building, Rochester, New York.
Highest references.

Inquiry No. 5449.—For the address of the Furber Patent Shoe Company.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 5450.—For the address of the U. S. Silver Co., also of the Crown Silver Co.

Patentable, combined working machine for sale. For cabinet makers, machinists, amateurs. Has capacity of 12 different apparatus. Foot power. Also a working bench to match. All rights to buyer. Sold separately or together. Buddig, Eustis, Neb.

Inquiry No. 5451.—For manufacturers of machinery for making tooth brushes.

FOR SALE.—35 H. P. Berger Gas Engine. A splendid engine at a bargain. Burrell & Morgan., Elkhart, Ind.

Inquiry No. 5452.—For the address of the Pyle National Electric Headlight Co.

FOR SALE.—Home and foreign patent rights covering Combination Pastry Knife. Comprises five utilities. Cost 3 cents to manufacture. Adapted to mail order custom, F. A. Tobler, Bisbee, Arizona.

Inquiry No. 5453.—For makers of a bower-barffing equipment.

Inquiry No. 5454.—For dealers in sulphuric acid in tank cars in quantities.

Inquiry No. 5455.—For a small ice machine, which is not expensive, and which is realy suitable for family use.

Inquiry No. 5456.—For the address of Geo. W. Shaw, manufacturer of wooden mantels, coal and gas grates.

Inquiry No. 5457.—For an electrical device by means of which the number of feet of water in a reservoir or tank can be ascertained at a distance of 4 or 5 miles.

Inquiry No. 5458.—For manufacturers of stamped steel cellings.

Inquiry No. 5459.—For machines for making paper boxes and cartons.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9378) H. L. J. says: I was recently shown an optical illusion which puzzles me. A chicken feather was placed near my eye, and looking through it at my hand with fingers slightly opened, and distant about 15 inches, I saw the bones in my fingers, as clear and distinct in outline as with the X-ray. So did others of the party. Again, the feather held in same manner between the eye and the sun when near the setting horizon, showed all the colors of the rainbow in same order and position. Please give the philosophy of all this. A. The experiment you made in looking through the meshes in the feather was an experiment in diffraction. When you looked at your finger held at a distance from the feather you saw a fringe or shadow which followed the outline of the edges of the finger. It did not resemble the outline of the bones at all, as they are seen on the fluorescent screen by X-rays. By the X-ray you see the bones as shadows, larger at the joints; you see the tapering shafts of the bones also. Here you only see the outline of the flesh of the fingers in a double line on each side of the finger. To test the matter use a lead pencil or a stick of about the size of the finger, and you can see the bone in a stick exactly as well as in your finger. There has been a very ingenious toy called the "bonescope" made on this basis. A piece of fine cloth is stretched over a half-inch hole in a bit of wood, which may be two inches across and a half inch thick. On looking through the hole in the center you may see all that you describe. The colors seen on the horizon and in looking at the setting sun are due to the interference of light. You will find all these appearances described, under "Diffraction and Interference of Light." The experiment is very curious, but is explained without difficulty. See Weight's "Light," which we can furnish for $2 mailed.

(9379) G. E. C. asks: 1. How many cubic feet capacity would be necessary in a tank or other reservoir, holding compressed air at a pressure of 200 pounds to the square inch, at the start, to run an engine furnishing 1 horse-power one hour? How large if the pressure was only 100 pounds at start? A. An engine running at a uniform air pressure of 50 pounds per square inch, at one half cut-off, requires 13½ cubic feet of free air per minute, delivered at ordinary temperature. The supply of air from a high-pressure tank, say of 200 pounds to 50 pounds, reduces the temperature over 300 deg. F. with an expansion of about two and one-half volumes; so that if heat can be added to the air after expansion from the tank, a considerable economy may be obtained in using compressed air from both pressures. The tank must have a reserve ca-

© 1904 SCIENTIFIC AMERICAN, INC

pacity for the engine running pressure at 50 pounds, and, therefore, the relative volumes being 14 1-3 at 200 pounds and 4 1-3 at 50 pounds, we find that the tank should have a capacity of 81 cubic feet at 200 pounds pressure, or say 3 feet diameter by 12 feet in length; and for 100 pounds initial pressure, a tank twice the capacity, or 4 feet diameter by 13 feet long. 2. Could a windmill be used for compresing the air, thus conveying the energy of the wind to the engine, and thence to a dynamo, for electric lighting, etc.? Would we not by so doing convert the unsteady, jerky motion of a windmill to an even, steady motion suitable for any purpose? A. A windmill can be used for compressing air to run a motor for driving a dynamo, and with ample storage the 24-hour day's work of the windmill may be stored for supplying the evening light current, either by compressed air or by direct driving of a dynamo and charging storage batteries. See SCIENTIFIC AMERICAN SUPPLEMENT Nos. 709, 606, on windmills for electric supply. 3. About what power would one get for use on the dynamo from an ordinary 8-foot windmill with the speed of wind at which it would do satisfactory work pumping from an 80-foot well? A. An 8½-foot windmill is only equal to one-tenth of a horse-power in a 16-mile-per-hour wind, and is totally unfit for transmission of pneumatic or electric power for any available work. A 30-foot mill is a useful source of power for such work, or equal to 3 horse-power in a 16-mile wind. 4. How many gallons of water flowing from an elevation of 50 feet, when applied to a water motor, will give 1 horse-power for one hour? If I could not use the compressed air as above suggested, could not the wind and water method be used? A. Four thousand gallons of water falling 50 feet in one hour are equal to one theoretical horse-power, and in the way you suggest may be made available for constant power by a reservoir of 12,000 or more gallons. A windmill 25 feet diameter, which has a capacity of 6,000 gallons per hour, 50 feet high, in a 16-mile wind, and with an adjustable pump which will work in any wind down to 8 miles per hour, may be made a useful source of power.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending April 19, 1904.

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Acids, making ortho-oxy-carbon, G. Wichmann 757,702
Adding or subtracting machine, J. H. Martin 758,013
Advertising and exhibiting paints, wall finishes, etc., device or means for, J. F. Gould 757,549
Air compressor, J. C. Williams 757,704
Air compressor unloading device, W. S. Fairhurst 757,901
Air purifier, J. S. Macardle 757,475
Antiseptic attachment, telephone, H. L. Thompson 757,850
Apron, storm, G. A. Hughes 757,749
Autoharp, E. E. Cruger 757,890
Automobile fender, A. Miesse 758,014
Automobiles, propulsion of electric, J. W. Aylsworth 757,715
Awning cover, automatic, W. R. Mudd 758,016
Axle, J. H. Entrekin 757,444
Badges, buttons, mirrors, etc., shell and covering therefor for, W. Hornich, Jr. 757,744
Bag. See Odorproof bag.
Band or strap brake, Middleton & Smith 757,480
Barrel, kraut dispensing, T. W. McFarland 757,951
Bath adjustable frame, combined automatic shower and vapor, Linendoll & Houghten 757,933
Bath spray, V. C. Van't Woud 757,791
Bath tubs, etc., leg fastening for, T. W. Simcox 757,974
Battery plates, apparatus for casting, J. Bijur 757,719
Battery plates, making storage, J. Bijur 757,718
Bedclothes holder, F. L. Germain 757,451
Bedstead and chest, folding, W. A. Arnold 757,430
Bedstead fastener, H. H. Hirsch 757,924
Belt fastener, Junkin & Alexander 757,662
Belt fastening implement, W. W. Woodley 757,589
Belting and making same, machine, B. G. Harley 757,919
Binder, loose leaf, J. W. Husing 757,660
Binder, temporary, W. J. Rile 757,682
Binding, A. S. Woodard 757,990
Binding post, S. C. Houghton 757,809
Blanks, mechanism for feeding thin flat flexible, L. A. Mayall 757,667
Blasting compound, J. Tollner 757,693
Block system emergency apparatus, F. V. Thompson 757,692
Blotter attachment, desk, J. I. Haycraft 757,921
Board for building purposes, A. B. Keyes 757,812
Boards from structures, implement for detaching, F. Guenther 757,915
Boat, J. C. Nichol 757,832
Boilers, cleaning and restoring, A. R. Raymer 757,839
Book leaf raiser, Sebastian & Stoebe 757,779
Boot or shoe for athletic purposes, P. A. Vaile 757,983
Boring machine, C. E. Gadfield 757,734
Boring tool, expansion, W. Pohlman 757,494
Bottle, Blue & Herndon 757,647
Bottle, J. Auld 757,714
Bottle, non-refillable, T. M. Wood 757,707
Bottle, non-refillable, A. Oullie 757,955
Bottle soaking apparatus, W. B. Wright 757,535
Bottle stopper and opener, F. Goodrich 757,548
Bowling alley, A. Herbst 757,922
Box, M. F. Middleton 757,827
Box and cutter for goods in ribbon form, combined, F. D. Scott 757,844
Box forming machine, S. Y. High 757,870
Bracelet, expansive, M. S. Rodenberg 757,772
Bracket for universal stands or supports, A. L. Robbins 757,498
Brake handle, C. J. Keplinger 757,468
Brick car, elevating, A. J. Zilker et al 757,710
Brick machine, Randall & Vanneman 757,961
Brick mold, Crapp & Finch 757,726
Bridge, E. L. & J. C. Dildine 757,804
Bridge construction, S. W. Hill 757,552
Bridge construction, arch, S. W. Hill 757,553
Bridle bit, C. G. Olin 757,954
Broiler, J. Frye 757,864
Broom, F. R. Lay 757,818
Brush, floor or like, F. Neidenbach 757,831
Brush, fountain, A. B. Landreth 757,628
Brush, fountain, D. E. Dunkle 757,897
Brush holder, antiseptic tooth, J. A. Cochrane 757,885
Brush with washing device, tooth, F. Fritz 757,907
Bucket or pail fastener, R. Steidl 757,848
Burglar and fire alarm, M. Nickels 757,490
Burner. See Gas burner.
Burner, J. D. Green 757,653
Button, combination collar and cuff, A. E. Strang 757,978
Button, garment, R. Steiner 757,576
Cabinet, L. Pederson 757,957
Cable grip, T. J. Cook 757,724
Cable tension regulator, overhead, J. F. & D. J. McKay 757,952
Camera focusing device, M. Schell 757,968
Camera, photographic, H. P. Tattersall 757,691
Camera, photographic, J. A. Pautasso 757,836
Can capping machine, F. Rogers 757,842
Can capping machine, J. T. Wilmore 758,034
Cans, apparatus for exhausting air from fruit, R. C. Davis 757,895
Candy flatting machine, H. G. Lange 757,472
Cane crusher, sugar, Wilson & Crumbly 757,988
Car brake, W. Gossett 757,910
Car brake and starter, combined, Kellogg & Swain 757,811
Car, dump, A. King 757,753
Car engines, apparatus for controlling the speed of motor, A. Krebs 757,815
Car fender, H. Howe 757,746
Car fender, E. Sherwood 757,845
Car friction and direct-acting spring draft-rigging, combined, F. B. Townsend 757,579
Car, motor, W. G. Wilson 757,533
Car or engine replacer, F. J. Fewings 757,608
Car, ore, C. Canclini 757,860
Car replacer, C. A. Fischer 757,902
Car wheels, making, H. V. Loss 757,819
Cars, flexible metal pipe coupling for connecting the air and steam pipes of railway, G. D. Pettingell 757,493
Carbid, producing, W. S. Horry 757,617
Carbureter, S. A. Lockhart 757,935
Cashiers, registers, and recorders, keyboard mechanism for mechanical, Dement & Hull 757,601
Casting machine, J. Bijur 757,720
Casting open-work structures, apparatus for, J. Bijur 757,721
Cement kiln cleaning machine, C. J. Van Doren 757,522
Cementing material and making same, T. W. Cappon 757,883
Chain, drive, E. F. Morse 757,762
Chair fan or mirror attachment, rocking, J. F. Yoho 757,857
Chopping block, butcher's, J. T. Nichols 757,488
Christmas tree candle holder, H. G. Hess 757,869
Chuck, C. R. Moon 757,561
Cigar manufacturing machine, B. Wertheimer 757,584
Cigars with smoke improving portions, providing, H. F. M. Thoms 757,514
Circuit controller for induction coils, R. Varley 757,792
Clothes drier, P. A. Ringnell 757,497
Cluster socket, J. H. Dale 757,441
Clutch mechanism, Ford-Smith & Coventry 757,805
Coal tipple structure, T. W. Fitch, Jr. 757,732
Cock safety attachment, gas, B. F. Edwards 757,652
Coffee roaster, J. E. Herriott 757,743
Coin controlled apparatus, W. Webber 757,530
Coin controlled dispensing apparatus, D. Sullivan 757,690
Coin counting and packaging machine, E. N. Gilfillan 757,612
Coin detector, F. G. Hartell 757,741
Coke oven, retort, A. C. Kloman 757,469
Coke oven, retort, W. M. Scott 757,509
Coloring machine, A. C. Hough 757,554
Commutator, automatic, J. H. Mercadier 757,942
Compound engine, S. Rothschild 757,965
Computating machine, Scott & Taylor 757,508
Concrete piles, sectional core for making, G. H. Poor 757,767
Conveyor spout coupling, sectional, C. F. Spencer 757,573
Conveying apparatus, material, H. Marcus 757,477
Cooking retort or kettle, O. Hubbell 757,555
Cooling apparatus, E. P. F. Magniez 757,822
Copper and zinc from ores, electrolytically extracting, S. Laszczynski 757,817
Cot, P. D. Heather 758,008
Cream separator, C. T. McCarroll 757,669
Crusher. See Cane crusher.
Cultivator, O. H. Cloyd 757,862
Curtain and shade roller holder, combined window, A. F. Gilbert 757,547
Curtain drying and stretching frame, lace, G. F. Hullings 757,930
Curtain fastener, F. P. Pfleghar 757,838
Dam, portable power, T. F. Gilliland 757,909
Dental appliance, W. T. Lyon 757,938
Desk, hotel register, J. I. Haycraft 757,920
Disinfecting apparatus, A. Giersiepen 757,806
Display rack or case, C. D. Allen 757,643
Distillation of wood and production of charcoal, apparatus for the, H. A. Mackie 757,939
Draft and buffing mechanism, F. W. Ritter, Jr. 757,841
Draft device, C. R. Davis 757,995
Draft equalizer, E. F. Moran 757,761
Dredger or shaker, powder, C. E. Grapewine 757,912
Drilling and automatic centering device, McElwain & Young 757,950
Dust guard, E. Jacquemin 757,466
Dyeing apparatus, automatic, J. Marshall 757,478
Electric arc rupturing device, S. H. Short 757,782
Electric controller, A. C. Eastwood 757,898
Electric furnace, Horry & Price 757,621
Electric lighting and power system, W. A. Turbayne 757,695
Electric motor, reciprocating, A. F. Christmas 757,991
Electric resistance furnace, E. F. Price 757,634
Electric switch, G. H. Whittingham 757,853
Electric switch, C. F. Hopewell 757,925
Electric switches or the like, means for protecting live parts of, W. McDevitt 757,830
Electrical generating system, W. A. Bole 757,436
Electrolytic deposition apparatus, W. J. & J. H. Jory 757,557
Electrotype plates, mechanism for holding, C. W. Eberhard 757,603
Elevator brake mechanism, A. Sundh 757,789
Elevator hoisting gear, A. Sundh 757,788
Embossing machine, H. S. Maidhof 757,758
Embossing machine platens, rotary support for, H. S. Maidhof 757,759
End gate, O. B. Reynolds 757,680
Engine whistle attachment, gas, W. L. Paul 757,673
Engines, flywheel for quick-running internal combustion, F. Reischenbach 757,636
Envelop and sheet of paper, combined, R. N. Wilt 757,801
Envelop fastener, G. D. Barber 757,716
Envelop or expanding wallet, A. Bushnell, Jr. 757,596
Excavators, car placing attachment for, H. H. George, Jr. 757,450
Excavators, car placing attachment for power, H. H. George, Jr. 757,449
Exercising apparatus, G. Yoerger 757,709
Explosive compound, J. P. Arnold 757,713
Explosive engine, H. R. Palmer 757,632
Extension table, J. & F. Dobrodenka 757,544
Eye shade, N. R. Wickersham 757,854
Eyelet, J. C. Engels 757,605
Fan, F. N. Roehrich 757,774
Fan, electric, F. N. Roehrich 757,773
Fan for disinfecting purposes, W. W. Rossiter 757,684
Feed cutter, F. Hamachek 757,614
Feed water heater, J. E. Lewis 757,665
Feed water heater, S. W. Simpson 757,846
Feed water regulator, J. B. Perkins 757,837
Fence post, V. E. Randall 757,962
Fence post, M. C. Wix 757,989
Fence post, H. J. Donahoe 758,002
Fence weaving machine, wire, A. E. Blashill 757,646
Fence, wire, W. B. Hughes 757,928
Fender. See Automobile fender. Car fender.
Fire alarm, T. F. Litaker 757,934
Fireproof building construction, G. A. Turnbull 757,519
Fish line reel, E. D. Rockwell 757,964
Fluids, apparatus for regulating the flow of, J. J. Royle 757,502
Fluids or solid materials, apparatus for operating on finely-divided, J. Luhne 757,757
Folding table, W. R. Montgomery 757,481
Food products, apparatus for preparing cereal, J. H. Miller 757,945
Foods, apparatus for retaining heat in, E. C. Kirk 758,009
Fruit or berry box, J. E. Lynam 757,558
Fruit or vegetable eye extractor, R. Patterson 757,835
Fruits, treating, C. R. Wilson 757,706
Furnace, S. C. Davidson 757,442
Furnace, O. Wundrack 757,536
Furnace, Mylin & White 757,949
Furnace ash chute, F. J. Blum 757,435
Furnaces, means for operating hydrocarbon burners for metallurgical, H. W. Falk 757,606
Furring clip, metallic, D. Ewart 757,863
Furring, wall, J. H. Nicholson 757,489
Fuse making machine, Lispenard & Truyter 757,580
Game, P. D. Bird 757,434
Game, J. R. Knapp 757,470
Game board, D. Stanger 757,976
Game table, J. S. Croxford 757,440
Garment supporter, T. M. Wheless 757,701
Gas battery, J. H. Reid 757,637
Gas burner, O. D. Cornell 757,651
Gas burner attachment, E. D. McCahill 757,482
Gas generator, H. C. Hanson 757,615
Gas generator, acetylene, W. J. Stinson 757,577
Gas generator, acetylene, G. A. Bidwell 757,875
Gas generator and burner, oil, J. P. Tirrell 757,980
Gas holder, J. H. Coke 757,887
Gas meter, dry, S. Kozminski 757,627
Gas mixer. A. M. Gummer 757,916
Gear cutting machine, W. A. Twining 757,696
Glass melting furnace, M. M. Maher 757,666
Glue and gelatin from bones, making, H. Hilbert 757,658
Golf ball, T. C. Crawford 757,600
Governor, engine valve, C. Kuhlewind, ... 758,010, 757,011
Governor, speed, C. Robinson 758,020
Grain drill, L. E. Roby 757,771
Grain screen, F. Fredeen 757,905
Grate or fireplace, fire, F. J. Bostel 757,595
Greenhouse or other glazed structure, C. B. Weathered 757,986
Grinding or sharpening device, I. M. Rose 757,843
Grip fastener, multiple, H. A. Meyercord 757,944
Guns, auxiliary barrel for breech loading, V. C. Tasker 757,790
Hammock stand, folding, G. F. Allen 757,428
Harness, F. J. Schenk 757,642
Harp, T. J. Hissem 757,462
Harvesting machine divider, G. Wilson 757,587
Hat trimming machine, F. C. Craw 757,542
Headlight, electric, W. H. Northall 757,564
Heating, electric, W. S. Horry ..... 757,618 to 757,620
Heating, electric, E. F. Price 757,633
Heating furnace, hot air, E. A. Tuttle 757,520
Hinge, J. W. Skilton 757,784
Hinge, frictional locking, P. C. Palmer 757,492
Hinge, spring, H. L. Ferris 757,607
Hitching post, T. C. Butterworth 757,882
Hoof pad, E. E. Lemon 757,473
Horseshoe, Fisher & Corrodi 757,445
Horticultural implement, E. Haines 757,739
Hose, F. B. Bosch 757,877
Hose coupling, F. W. Killen 757,752
Hose, rod, or pipe coupling, A. W. Huhsman 757,929
Hot air furnace, E. A. Tuttle 757,521
Household tool, H. H. Tyrrell 757,981
Hydraulic jack, F. H. Stillman 757,512
Index, ledger, G. C. Shepherd 757,510
Indexing card holder, H. Scudder 757,686
Induction coil, R. Varley ..... 757,523 to 757,525
Induction coil vibrator, R. Varley 757,527
Injector, steam boiler, T. J. Sweeny 757,849
Insulator, J. W. Osborne 757,765
Iron pyrites for desulfurization, preparing, U. Wedge 757,531
Jar fastener, S. A. Roden 757,683
Knitting machine needle, S. Woodward 757,708
Lace fastener, F. E. Stoke 757,977
Lacing device, E. T. Dixon, Sr. 758,001
Lacing loop, G. W. Prentice 757,678, 757,679
Ladder, step, P. Herder, Jr. 757,616
Lamp burner, coal oil, H. J. Pawling 757,674
Lamp, electric arc, R. Hopfelt 757,659
Lamp, electric arc, F. Sindingchristensen 757,847
Lamp, electric arc, I. W. Percival 757,958
Lamp, vapor, E. Seitz 757,780
Land roller, R. V. Wallace 757,583
Latch, O. F. Immell 757,464
Lathe taper attachment, turret, C. G. Richardson 757,681
Letter box, H. H. Warner 757,698
Line holder, C. Lykke 757,820
Linotype machine, S. J. Briden 757,648
Linotype machine, D. D. Scott 757,685
Liquid dispensing apparatus, C. A. Gildemeyer 757,611
Liquid dispensing apparatus, W. B. Cochrane 757,886
Lister, C. R. Davis 757,997
Loading apparatus for tramways, H. M. Sackett 757,777
Lock, S. Wisnewski 757,588
Lock, L. A. Frank 757,733
Lock and latch, H. G. Voight 757,529
Locomotive fire door, G. S. Edmonds 757,545
Loom picker motion, D. D. Miller 757,828
Looms, spooler for moquette or other pile fabric, J. F. Walker 758,028
Luggage carrier, F. Dales 757,892
Mail box, Sturgis & Allen 757,513
Mail delivery system, rural, W. A. Sumner et al 757,787
Mandrel, pipe, W. Allderdice 757,872
Mantle support, W. P. Johnson 757,556
Match machine, M. A. Sheldon 757,572
Measuring apparatus, C. R. Hudson 757,810
Measuring instrument, prepayment electrical, F. Conrad 757,439
Mechanical movement, D. W. Shiek 757,511
Metal bar cutting apparatus, V. E. Edwards 757,604
Metal sheets, machine for separating, G. Grove 757,453
Metal sheets, separating, G. Grove 757,454
Milk vat, G. H. Simon 757,569
Miter box, C. A. Anderson 757,538
Motor, J. T. McGrath 757,485
Mowing machine cutting apparatus, J. H. Wickamp 757,586
Multicylinder expansion engine, C. J. Williams 757,532
Music controller roll, A. Anderson 757,874
Music leaf turner, C. Thoma, Jr. 757,979
Nail blank feeding and sorting machine, Pierce & Newton 757,676
Nasal shield, T. Carence 758,030
Necktie securing device, F. Ferguson 757,730
Nut axle, C. Schneider, Sr. 757,506
Nut lock, J. W. Hancock 757,457
Nut lock, W. Rundle 757,775
Nut, lock, R. Varley 757,526
Nut wrench, W. E. Gilliland 757,613
Odor-proof bag, W. P. Flowers 757,610
Ore concentrator, centrifugal, E. R. Week 757,699
Ornamental fabric, A. S. Waitzfelder 757,851
Packed joint, F. B. Clark 757,992
Packing box, M. O. Anthony 757,591
Packing, rod, C. W. Caldwell 757,597
Pad. See Hoof pad.
Pad or tree protector, G. E. Brown 757,437
Pamphlet folding and wrapping apparatus, S. Elliott 757,728
Paper clip or holder, W. Lukes 757,937
Paper feeding device, T. G. & J. B. McGirr 757,484
Peeler, fruit or vegetable, T. M. Guest, ... 757,550 757,551
Pen, A. Hart 757,868
Pen, fountain, W. R. Rothwell 757,500
Pen, fountain, M. R. Crossman 757,543
Pen, fountain, F. M. Kegrize 757,664
Phase angle adjusting means, E. M. Tingley 757,516
Phase angle adjustment, E. M. Tingley, ... 757,517 757,518
Phase regulation, E. M. Tingley 757,515
Phonographs, etc., apparatus for casting cylinders for, A. Hamon 757,867
Photographic printing apparatus, White & Mallison 757,798
Photographs, rocket apparatus for taking, A. Maul 757,825
Photoprints, etc., apparatus for removing surplus moisture from, J. Halden 757,456
Physician's examining and treating couch or table, C. Hazard 757,807
Piano action, upright, F. Hammerle 757,657
Piano actions, pianissimo device for grand, A. T. Strauch 757,689
Piano, mechanical, P. Pomero 757,566


"Star" Foot and Power Screw Cutting Automatic Cross Feed Lathes
FOR FINE, ACCURATE WORK
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N.Y., U.S.A.

ENGINE & FOOT LATHES. MACHINE SHOP OUTFITS. TOOLS AND SUPPLIES. CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

Suppose You Save
50 Cents On Your First Belting Cost, And Breaks And General Belt Debility Costs You A Couple Of Dollars Every Now And Then, Where's The Initial Saving Gone?
True happiness lies in the use of SCHIEREN BELTING, and its cost isn't so much. Dixie Belt Leather Book tells.
CHAS. A. SCHIEREN & CO.
NEW YORK: 52 Ferry St. CHICAGO: 92 Franklin St. BOSTON: 192 Lincoln St. PITTSBURG: 243 Third Av. PHILADELPHIA: 228 N. Third St. DENVER: 1519 Sixteenth St. HAMBURG: Pickhuben 4.

Veeder Counters
to register reciprocating movements or revolutions. Cut full size.
Booklet Free
VEEDER MFG. CO.
Hartford, Conn.
Cyclometers, Odometers, Tachometers, Counters and Fine Castings.


Price $1.00

You Drink Down Disease

every time you take a draught of water that has not been filtered. Impurity lurks in it. Germs of disease cannot be seen, but they cannot pass through the celebrated
Berkefeld Filter
because it is so scientifically constructed as to suppress every atom of solid matter in the water, thoroughly purifying it. Will give one gallon of pure water in 4 minutes.
No trouble to clean or keep in order.
BERKEFELD FILTER CO., 4 Cedar Street, New York

STEAM TURBINES. — THEIR CONSTRUCTION, Operation and Commercial Application. SCIENTIFIC AMERICAN SUPPLEMENTS 1306, 1307, 1308, 1422, 1460, 1447, 1370, 1372. The articles have all been prepared by experts in steam engineering. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

WORK SHOPS
of Wood and Metal Workers, without steam power, equipped with
BARNES' FOOT POWER MACHINERY
allow lower bids on jobs, and give greater profit on the work. Machines sent on trial if desired. Catalog Free.
W. F. & JOHN BARNES CO.
Established 1872.
1999 RUBY ST., ROCKFORD, ILL.


FOR LIGHT AND MEDIUM WORK
this new 14 inch
B. F. BARNES
Upright Drill is the best tool made. Substantial, well built, up to date. The driving power is strong and positive—the five-step cone gives wide range of speeds—will drill from 1/16-inch to ¾-inch. Reading matter on request.
B. F. BARNES COMPANY, Rockford, Ill.

TO MINE OWNERS
You need a Hoisting Engine. You want the best, strongest, safest, most up-to-date engine that is made—the most durable and yet the greatest saver of money. Send for our free catalogue and state the size of engine you want. We build them for mines, quarries and docks. Both friction and geared hoist, 6 to 150 H. P. All parts easily interchangeable.

WEBER GAS & GASOLINE ENGINE CO. P. O. Box 1114-a, Kansas City, Mo.
EASTERN OFFICE, 115 Liberty Street, New York City.

Price $15.

GAS ENGINE IGNITERS
for Marine, Stationary and Automobile engines. Will save their cost many times over in one year.
Write for circulars.
The Carlisle & Finch Co.,
233 E. Clifton Ave., Cincinnati, O

Volt Ammeters
Pocket size, but large enough for accuracy and practical use. Various ranges for testing batteries, electric light, telephone and other circuits, etc. Also, Voltmeters and Ammeters for general measurements.
Send for Circular.
L. M. PIGNOLET,
80 Cortlandt St., New York, N.Y.

THE MIETZ & WEISS KEROSENE and GAS ENGINE
Sizes from 1 to 60 H.P.
Send for Catalogue.

Runs KEROSENE cheaper and safer than gasoline. Automatic, simple, reliable. No electric battery or flame used. Perfect regulation. Belted or directly coupled to dynamo for electric lighting, charging storage batteries, pumping and all power purposes.
A. MIETZ,
198-138 Mott St., NEW YORK.
ADOPTED BY U. S. GOVERNMENT.
Highest Award, direct coupled Generator Set, Paris Exposition, 1900.
Gold Medal, Pan-American Exposition, 1901. Gold Medal, Charleston, S. C., Exposition, 1902.

© 1904 SCIENTIFIC AMERICAN, INC

$40.00 A WEEK.



Reliable man or woman each county as manager to exhibit, take orders, appoint agents for **Harrison Valveless** Oil-Gas Stoves. **Wonderful invention**—beats others—Automatically generates fuel gas from kerosene—**Miniature gas works**—Absolutly safe—Enormous demand—**Splendid for summer cooking**—Delight customers—Cheap, clean, safe fuel. **Gasoline is dangerous. Catalogue Free.** Write today. **World Mfg. Co., 5687 World Bld'g, Cincinnati, O.**

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.

Lackawanna Motors



are Simple and Valveless. Easy to start and easy to operate.

For automobiles and launches.

3 to 24 H.P.

Cut shows Lackawanna Reversing Device attached to our 6 H. P. marine motor. No reversing gear necessary

LACKAWANNA MOTOR COMPANY
51-61 Letchworth St. - - Buffalo, N. Y.



Send For It To-Day

You'll find it always convenient to have as a useful and instructive book

Montgomery & Co.'s Tool Catalogue

The new edition has 704 pages and is copiously illustrated. Pocket size 6¼x4½ ins. Sent by mail for 25c.

MONTGOMERY & CO.,
105 Fulton St., New York City.

PALMER

MARINE and STATIONARY

MOTORS

2 and 4 CYCLE



are no experiment, as they are in successful operation in all parts of the world.

Launches in stock.

Send for Catalogue.

PALMER BROS.,
Cos Cob, Conn.
New York Office, 136 Liberty St.

Squabs Pay Beat Hens

Easier, need attention only part of time, bring big prices. Raised in one month. Attractive for poultrymen, farmers, women. Send for **FREE BOOKLET** and learn this *immensely rich home industry.*

PLYMOUTH ROCK SQUAB CO., 289 Atlantic Ave., Boston, Mass.

The Franklin Gas Engine

One-Half Horse Power

worth $100 complete. We sell all necessary castings, materials and detail drawings for $16.50. For real work—not a toy. 450 revolutions per minute. Upright or horizontal form. Finished parts sold separately. Runs by gas or gasolene. For boys and men with a mechanical turn. Write for circular 9.

PARSELL & WEED
129-131 West 31st Street. New York.

RADIUM AND RADIO-ACTIVITY

The SCIENTIFIC AMERICAN SUPPLEMENT has published the most complete information on the subject of Radium and Radio-activity that has thus far appeared.

The following articles, written by men who have played a prominent part in the discovery of the marvelous properties of radium, should be read by every student of chemistry and physics:

RADIO-ACTIVITY AND THE ELECTRON THEORY. By SIR WILLIAM CROOKES. SCIENTIFIC AMERICAN SUPPLEMENT **1402.**

THE RADIO-ACTIVITY OF MATTER. By PROFESSOR HENRI BECQUEREL. SCIENTIFIC AMERICAN SUPPLEMENT **1379.**

SOME PROPERTIES OF THE RADIO-ACTIVE SUBSTANCES. By PROFESSOR HENRI BECQUEREL. SCIENTIFIC AMERICAN SUPPLEMENT **1427.**

PRODUCTION OF HELIUM FROM RADIUM. By SIR WILLIAM RAMSAY. SCIENTIFIC AMERICAN SUPPLEMENT **1444.**

THORIUM: A RADIO-ACTIVE SUBSTANCE WITH THERAPEUTICAL POSSIBILITIES. By DR. SAMUEL G. TRACY. SCIENTIFIC AMERICAN SUPPLEMENT **1470.**

RADIUM IN MEDICINE. By DR. SAMUEL G. TRACY. SCIENTIFIC AMERICAN SUPPLEMENT **1455.**

A RÉSUME OF RECENT SPECIAL STUDIES OF RADIUM AND RADIO-ACTIVITY. SCIENTIFIC AMERICAN SUPPLEMENTS **1468** and **1471.**

RADIUM AND RADIO-ACTIVE SUBSTANCES. By WILLIAM J. HAMMER. SCIENTIFIC AMERICAN SUPPLEMENT **1429.**

A COMPLETE MANUAL OF RADIUM TECHNOLOGY, clearly explaining the methods of obtaining radium, conducting experiments with the substance and measuring its radio-active force will be found in SCIENTIFIC AMERICAN SUPPLEMENTS **1475, 1476, 1477.**

These SCIENTIFIC AMERICAN SUPPLEMENTS comprise what may well be considered an admirable text-book on the subject of radio-activity.

Price of Scientific American Supplements
TEN CENTS BY MAIL
for each number mentioned. Order through your newsdealer or from

MUNN & CO., 361 Broadway, New York

BICYCLES FOR SALE

At Prices All Can Pay

9,000 wheels to be sold this month. Factories have gone down with a crash. Dealers are swamped. We are seizing lot after lot for defaulted storage.

5,000 Bicycles, $12.50, $15, worth $25 to $30.

4,000 Bicycles, $18 to $25, worth $35 to $50.

Manhattan Racers, $25. Regular $50 wheel, with coaster brake.

Second-Hand Bicycles, $5 up. In this lot are fine police wheels from Philadelphia and Baltimore. Some very slightly used.

98 cents for $2 Tires. A special sale. An unpaid storage seizure cuts prices. Other tires, $1.25, $1.50, $2.

$3 Lamps, 68 cents. Great factory clearing sale. $1 worth of sundries for 40c. See famous bargain windows.

MANHATTAN STORAGE CO.
No. 42 Cortlandt Street, New York, N. Y.



Price $210

Warwick Motor Cycles

New Grip Control. Many other new features. The Best yet Weight, 99 lbs Send for catalog

Warwick Cycle and Automobile Co., Springfield, Mass.

Patents, Trade Marks,

COPYRIGHTS, etc.,

Address **MUNN & CO.,** Solicitors of Patents.

Office of the SCIENTIFIC AMERICAN
361 Broadway, New York.
Branch Office: **625 F St., Washington, D.C.**
Hand-book Sent Free on Application.

The Hygrophant

shows with accuracy and without computation the temperature and degree of humidity. Send for circular

J. S. F. HUDDLESTON
20 Devonshire St., Boston

Get Rid of Boiler Scale

and save hundreds of dollars every year by using the wonderful **Dean Boiler Tube Cleaner.** It will cost



you nothing to make a thorough trial of this cleaner, as we will be pleased to send you one for a free trial. Write to-day for details of our offer.

WM. B. PIERCE CO.
319 Washington Street, Buffalo, N. Y.

HOW TO MAKE AN ELECTRICAL Furnace for Amateur's Use.—The utilization of 110 volt electric circuits for small furnace work. By N. Monroe Hopkins. This valuable article is accompanied by detailed working drawings on a large scale, and the furnace can be made by any amateur who is versed in the use of tools. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1182.** Price 10 cents. For sale by MUNN & CO., 361 Broadway, New York City, or by any bookseller or newsdealer

Automatic Machines FOR FORMING WIRE

from coil into shapes similar to cuts. We can furnish machines or goods, as desired.

☞ *Send for Catalogue.*

BLAKE & JOHNSON,
P.O. Box 7, WATERBURY, CONN.

A GOOD INVESTMENT

For **$1.75** we will send by express (not prepaid), complete N. D. Outfit with full instructions for learning **TELEGRAPH OPERATING.** A fascinating study that will enable you to earn good wages. Send 25 cents for universal dating stamp, by mail, postpaid. Send for our catalog. *Established* 1879.

J. H. BUNNELL & Co., Inc. 20 Park Place New York

PORTLAND CEMENT MAKING IS described in excellent articles contained in SCIENTIFIC AMERICAN SUPPLEMENTS **1433, 1465, 1466.** Price 10 cents each, by mail. Munn & Company, 361 Broadway, New York City, and all newsdealers.



Kerosene Oil Engine

Nothing but Kerosene Oil to run it

Simple, Safe and Efficient. Needs little attention, is less likely to get out of order, and is cheaper to run than any other engine manufactured. **Economical and Easily Operated.**

International Power Vehicle Co.
Stamford, Conn.



Marine Motors

If you want a Gasoline Motor, with all the good points and none of the bad, buy a

"RELIABLE"

Either jump or make and break Spark.

Boston Gasoline Engine Co.
134 Broad St., Boston, Mass

Piano player's key striker, J. Courville	757,889
Picture projecting apparatus, slide-feeding device for, Green & Gent	757,737
Pile driver, J. H. Hopkins	757,926
Pile driving apparatus, H. W. Phillips	757,960
Pin lock, W. H. Taylor....758,026	758,027
Pin retainer, J. Evans	757,729
Pin tumbler lock, W. H. Taylor	758,024
Pin tumbler lock key, W. H. Taylor	758,025
Pipe and nut wrench, combined, G. E. Carnes	757,861
Pipe coupling, automatic, C. O. Cole	757,888
Pipe or bar cutter, W. T. Snell	757,975
Planer, E. Rawson	757,963
Planter and fertilizer distributer, seed, J. D. Kinney	757,813
Plaster of Paris, manufacture of, W. Brothers	757,649
Plate box, H. D. & R. C. Bickford	757,540
Plow, F. Dinwiddie	757,443
Plow, O. C. Babcock	757,539
Plow, F. Wienke	757,855
Plow and planter, lister, C. R. Davis, 757,998,	757,999
Plow and planter, sulky lister, C. R. Davis.	758,000
Plow, sulky, C. R. Davis	757,996
Plow, sulky lister, C. R. Davis	757,994
Pocket, L. M. Brown	757,879
Pocketbook, O. A. Lehman	757,755
Polishing machine, D. McCance	757,763
Power and motion, mechanism for transmitting and controlling, W. H. Kessler	757,751
Power transmitter, J. Coates	757,599
Press, G. B. Rowe	757,501
Pressure, controlling device for maintaining steady, T. P. Ford	757,903
Pressure regulator, B. Zindel	757,590
Printing press, F. J. Herdle	757,460
Printing press, D. H. Saunders	757,967
Printing press, platen, J. Hein	757,458
Printing rollers, means for securing impression surfaces to, F. J. Herdle	757,461
Protractor and its accompaniments, J. H. Renshaw	757,568
Pulley driving mechanism, I. J. Daily	757,891
Pulp beating engine, J. White	757,585
Pulverizing machine, Schoellhorn & Albrecht.	757,969
Pump, ship, Sanborn & Runnells	758,022
Pumping apparatus, oil, C. Robinson	757,499
Push button switch, W. A. Church	757,541
Rack. See display rack.	
Rail joint, M. Lopprich	757,936
Rail joint, M. Warner	757,984
Railway chair, F. W. Pool	758,018
Railway, electric, G. H. Fretts	757,906
Railway rail stay, Laas & Sponenburg	757,754
Railway signaling, electric, S. M. Young	757,537
Railway trains at danger signals, means for stopping, W. L. Adamson	757,711
Railway wagon, J. T. Jepson	757,931
Railways, means for cleaning the third rails of electrical, W. Chausse	757,650
Rake, O. M. Walker	757,795
Ratchet wrench, G. Brauer	757,878
Razor, J. Guinan	757,656
Razor guard, J. Guinan	757,655
Reducing mill, H. W. Becht	757,433
Refractory material, basic, A. T. Macfarlane	757,821
Refrigerator, R. R. Graf	757,911
Refrigerator car air agitator, H. A. Turner.	757,581
Reins, driving, G. H. Carlin	757,598
Resawing machine, T. J. Mitchell	757,946
Rheostat, I. E. Storey	757,687
Rheostat, electric, R. W. Brown	757,880
Rocking chair with air apparatus, M. Friedland	757,447
Roller coaster, G. A. McLaughlin	757,487
Rolling machine, wheel, F. P. Bates	757,432
Rotary engine, A. Guindon	757,455
Rotary engine, J. S. Davis	757,894
Rulers, manufacture of, H. E. Peucker	757,675
Safety pin, F. Westpfal	757,700
Sail, spinnaker, G. A. Lowry	757,474
Sale recorder, D. Griffith	757,913
Sand box gage, T. E. Mooney	757,947
Sash lock, D. Wilde	757,856
Saw cover, W. C. Happe	757,740
Saw filing machine, N. Kall	757,663
Saw, portable crosscut, F. Richter	757,770
Saw tooth for metal saws, insertible, C. C. Newton	757,953
Sawing logs, etc., electrically-driven machine for, K. Kottmann	757,626
Sawing machine, J. A. House	757,745
Sculptor's copying machine, R. T. Paine	757,833
Seal lock, J. D. C. Knapp	757,814
Sealing envelopes and mailable matter and affixing stamps thereto, machine for, J. N. Stacy	757,574
Secondary battery, L. H. Flanders	757,446
Seedbox, R. Bassett	757,645
Semaphore, electric, D. Boisvert	757,722
Sewing machine, corset, S. Royle	757,966
Sewing machine illuminator, P. Englund	757,900
Sewing machine motor, J. H. Macon, Jr.	757,629
Sewing machine rotary fan attachment, H. W. C. von Castens	757,723
Sewing machine shuttle actuating mechanism, G. L. Corcoran	757,725
Sewing machine thread cutting device, J. T. Hogan	757,463
Shaft coupling, J. R. George	757,735
Shaft fastener, W. A. Jones	757,932
Shaft support and anti-rattler, combined, J. C. Bridgman	757,859
Sharpening attachment for band cutters and feeders, J. Manderson	757,823
Shearing tool, S. Arce	757,429
Sheet cutting machine, M. Meriam	757,560
Sheet mill adjusting mechanism, S. B. Ely et al.	758,003
Shoe, ankle supporting, G. Krieger	757,816
Shoe, electric sole, A. Reed	757,495
Shovels, making, F. Skelton	757,783
Shredding machine or the like, M. F. Williams	757,705
Sifter, ash, J. P. Hill	758,032
Signal apparatus, J. D. Price	757,768
Sink overflow device, Akers & Ross	757,871
Sizing, A. Muller-Jacobs	757,948
Skirt and waist holder, combined, M. Little-Pritzkow	757,756
Skirt supporter, A. M. Ott	757,672
Slotting machine, M. & H. E. Morton	757,562
Smoke conveyor, W. L. Gale	757,546
Smokers' articles, mouthpiece or stem for, J. A. Manahan	757,760
Soap holder, J. S. Roake	757,638
Soldering iron, electrically heated, A. C. McCloskey	757,670
Spinning ring, H. B. Hoyle	757,748
Spirometer, A. E. Wells	757,797
Spring. See Wagon spring.	
Spring controller, coil, T. A. Shea	757,781
Stacker, hay, J. W. Kenworthy	757,624
Starch by centrifugal action, separating, R. Schrader	757,778
Stay bolt, D. L. Shaffer	757,973
Steam engine, L. Goos, Jr.	757,452
Steam engine, F. P. Hummel	757,750
Steam generator, Kitchen & Perkins	757,625
Steam generator, G. L. Rose	757,639
Steam trap, automatic, J. M. Towne	757,694
Steel, treating and manufacturing, W. B. Burrow	757,803
Stenciling, Burdick & Pervilhac	757,438
Stone, manufacturing, J. C. McClenahan	757,483
Storage battery, A. V. Meserole	757,943
Stove, camp, D. L. Miller	758,015
Stove for heating smoothing irons, etc., W. Hegemann	757,742
Stove igniter, oil, W. H. Wilder	757,703
Stove or furnace, heating, R. W. Dodge	757,602
Stove, wickless blue flame oil, A. J. Blackford	757,876
Strip delivering apparatus, G. Norwood	757,565
Sulky, G. W. St. Clair	757,575
Superheater, J. P. Sneddon	757,570
Suspenders and belt, combined, S. L. Engel.	757,899
Swingletree or doubletree, E. Haiman	757,866
Syringe, H. M. Guild	757,654
Table leg attachment, J. F. Arnold	757,712
Tack claw, G. C. Parish	758,017
Tally device, L. L. Frost	757,908
Tap bottle, E. Walker	757,794
Telegraph switchboard spring jack, J. F. Skirrow	757,785
Telegraph system, H. O. Rugh....757,503,	757,504
Telegraph system, wireless, G. Marconi	**757,559**

WITTE GAS ENGINES

The highest type of self-contained engines on any commercial gas or liquid fuel. Now sold on **30 Days' Free Trial.** Very sensitive governor; perfect electric igniter, other exclusive essentials. Result of 30 years' experience. Write for Catalogue E

WITTE IRON WORKS CO.,
517 W. 5th Street, Kansas City, Mo.

TAKE THE NICKEL PLATE ROAD FOR THE ST. LOUIS FAIR.

Lowest Rates and many unusual privileges. Special $15.00 rate on certain dates. Full information on application to local Agents, or R. E. Payne, General Agent, 291 Main St., Buffalo, N. Y., or A. W. Ecclestone, D.P.A., 385 **Broadway, New York.**

THE
"BEST" LIGHT
is a portable 100 candle power light, costing only 2 cents per week. Makes and burns its own gas. Brighter than electricity or acetylene and cheaper than kerosene. No Dirt. No Grease. No Odor. Over 100 styles. Lighted instantly with a match. Every lamp warranted.
Agents Wanted Everywhere
THE "BEST" LIGHT CO.
87 E. 5th Street,
CANTON, OHIO.
THE BEST LIGHT.

The APPLE Ignition Dynamo

Saves battery troubles, attached to any gas engine. Governors, Storage and Dry Batteries, Spark Coils, Plugs, Switches, Automatic Timing Devices.

The Dayton Electrical Mfg. Co.
98 Reibold Bldg., DAYTON, O.

ELECTRIC LAUNCH MOTOR.—THE design in this paper is for a motor of unusual simplicity of construction, which can easily be built by an amateur at small cost. It is intended for a boat of about 24 feet over all and 4 feet 6 inches beam, drawing 18 inches, and is capable of propelling such craft at a speed of 7 miles per hour. Illustrated with 21 cuts. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1202.** Price 10 cents by mail, from this office and from all newsdealers.

Vaccination and Life Insurance

are alike in one particular: Vaccination makes a man immune from smallpox, life insurance makes his family immune from poverty.

Can you spare five minutes to read our little booklet, "The How and the Why"? We will gladly mail you a copy.

PENN MUTUAL LIFE INS. CO.
PHILADELPHIA

"The Sharer"



A new foot power that can be applied to all light machinery. A kick starts the machine and an occasional kick keeps it going. *Send for our Booklet.*

SLOTKIN & PRAGLIN,
210A Canal St., New York.

ELECTRIC SEWING MACHINE MOTOR.—The instructions and numerous illustrations of details contained in this article will enable any mechanic of average ability to build an efficient motor that will operate a sewing machine. The cost of materials for this machine should not exceed five dollars. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1210.** Price 10 cents by mail, from this office and from all newsdealers.

Low-Priced Electric Wagons



Capacity 1 to 3 Tons

Double Motor Equipment
Direct Double Chain Drive
No Gears or Pinions

THE AUTO-CAR EQUIPMENT CO.
Buffalo, N. Y.

50 Years' Experience

PATENTS

Trade Marks, Designs, Copyrights, Etc.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.

Patents taken through MUNN & Co. receive *Special Notice,* without charge, in the

Scientific American

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & CO. 361 Broadway, **NEW YORK**
Branch Office 625 F St. Washington, D. C.

© 1904 SCIENTIFIC AMERICAN, INC

NOW READY! A HALF PRICE EDITION

Appletons' Cyclopedia of Applied Mechanics

Each Volume 10x7x2. Weight 20 lbs.

Edited by PARK BENJAMIN, Ph.D., LL.B.

A Magnificent Set in Three Vols. Fully Illustrated

Handsomely bound in half morocco, each volume containing over 900 pages, with nearly 8,000 engravings.

SPECIAL PRICE $12.00

Heretofore the publishers' price of this work has never been less than $22.50 in the cheapest binding and it has been sold only by subscription. We have secured a special edition of this valuable work, and will box and ship, **prepaid**, the three volumes to any address in the United States or Canada on receipt of the above price. By purchasing **now from us** you save half the original price and have in return a technical cyclopedia and dictionary, the great usefulness of which has been testified to by nearly **one hundred thousand purchasers of this valuable work**—technicians and mechanics who refuse to estimate its value to them in their work by mere dollars and cents.

AS A REFERENCE WORK IT IS WITHOUT A PEER!

Containing upwards of 10,000 topics, 2,700 pages, nearly 8,000 engravings. It is the recognized standard of American mechanical practice in workshops, manufactories, technical schools, and libraries all over the United States. There is not a machinist, engineer, electrician, business manager or foreman who can afford to be without the information contained in these volumes. *You are doing yourself an injustice* if you don't take advantage of our offer and send for these volumes at once.

☞ *Add $1 extra for expressage to England and the Continent, or $2 extra to Australia and other countries.*

☞ *Special circular of contents of these volumes sent free. Our 40-page catalogue sent FREE on request.*

THE NORMAN C. HENLEY PUBLISHING COMPANY
132 Nassau Street, New York, U. S. A.

LEVIATHAN vs. LEATHER } DRIVING BELTS

EVIDENCE SUBMITTED:

TESTIMONY OF A CEMENT MANUFACTURER.

"We did not expect the 30-inch belt would do the business, as it was taking the place of a 36-inch double leather, and we bought the 30-inch to put on top of the 36-inch leather. Finally the 36-inch leather gave out, and, as I said before, we kept right on with the 30-inch Leviathan, and the beauty of it is, we have no use for the idler, the 30 inch running comparatively slack and transmitting nearly 500 horse power."

Further evidence as to what is done with **Leviathan Belting,** particularly under severe conditions, as exposure to water, oil, weather, or extreme heat, is ready for the asking.

It will pay you to ask.

MAIN BELTING COMPANY,
1223 CARPENTER STREET, - - - - - PHILADELPHIA
CHICAGO BOSTON NEW YORK BUFFALO



A BRAKE IS "THE JEWEL" OF BICYCLE MECHANISM

It is simply lawlessness to life and apparatus not to take advantage of the new principle applied in the new 1904

MORROW BRAKE

Morrow Trade-Mark

The Morrow avoids all troubles by employing but one clutch.
Send for a catalogue and learn the recommendatory features of this perfect device.
PRICE, $5. ECLIPSE MACHINE CO., Elmira, N. Y.

Steel Castings for Special Purposes

Our complete facilities enable us to undertake the manufacture of high grade steel castings for almost any purpose. Write us for particulars. **Open Hearth Steel Castings** for locomotives, ship building, electrical, pump and general machinery purposes. Subject to U. S. Government, Lloyd's, Railroad and other specifications. RAIL OR WATER DELIVERIES.

SEABOARD STEEL CASTING CO., Chester, Pa.

POCONO MOUNTAINS

Lackawanna Railroad

For an ideal outing this Summer. The region is high, the climate invigorating and the trip comfortably made in three and one-half hours from New York. A handsomely illustrated book of 128 pages, containing complete information about hotels and boarding-houses, together with a delightful love story entitled "A Chance Courtship," will be mailed on receipt of 10 cents in stamps.

Address T. W. LEE, General Passenger Agent, New York City.

Telegraphy, H. O. Rugh	**757,505**
Telegraphy, apparatus employed in wireless, J. A. Fleming	758,005
Telegraphy, device for wireless, J. A. Fleming	758,004
Telegraphy, multiplex, J. J. Ghegan	757,736
Telegraphy, wireless, F. J. Green	758,006
Telephone apparatus, electrical, P. H. Fisk	757,609
Telephone desk set, H. P. Clausen	758,031
Telephone transmitter, W. L. Wilhelm	757,799
Telephony, A. Meinema	757,826
Tent cottage, A. M. Holmes	758,033
Thermal cut-out, H. P. Clausen	757,884
Thermal cut-out, M. Setter	757,971, 757,972
Thresher and separator, combined grain, F. Fredeen	757,904
Ticket issuing machine, J. M. Siebler	758,023
Tie plate, W. S. Jones	757,467
Tiling substitute, E. Reizenstein	757,840
Tire filler, vehicle, C. D. Nirdlinger	757,631
Tire protector, J. L. Brown	758,029
Tire tightener, C. T. Umsted	757,697
Tire, vehicle, A. C. Hills	757,923
Toilet table and traveling trunk combined, lady's, A. L. Jacob	757,661
Too-great speed alarm, G. Rouaix	757,640
Tool hanger, E. B. Wiles	757,987
Tool, pneumatic, W. T. Sears	757,970
Top roll saddle, E. Dixon	757,727
Toy, J. J. Quinlan	757,567
Toy, mechanical, Patten & Lippy	757,834
Traction engine, F. C. Watson	757,985
Trap. See Steam trap.	
Traveling case, W. T. Richards	758,019
Trench digger, J. Helm	757,459
Tripod, folding, R. P. Palmer	757,766
Trolley, C. E. Smith	757,786
Trolley base, F. S. Martin	757,824
Trolley pole safety device, P. McCullough, et al	757,630
Truck for rolling stock, bogie, H. A. Hoy	757,927
Truck frames, device for lifting railway, W. Schott	757,507
Truck, lateral motion car, E. C. Washburn	757,852
Trucks, adjustable hook for hand, G. M. Vickers, Jr.	757,793
Trunk, J. A. H. Villmow	757,528
Tube bending machine, G. F. Atwood	757,593
Tubes, bending, G. F. Atwood	757,592
Tug, thill, J. S. Bean	757,717
Typewriting machine, W. J. Barron	757,431
Typewriting machine, R. W. Uhlig	757,982
Universal joint, E. J. Reece	757,769
Valve, E. P. Allen	757,873
Valce, faucet, E. F. Field	757,731
Valve, flush, E. A. Marsh	758,012
Valve for safety train stops, air, H. G. Sedgwick	757,571
Valve gear, explosive engine, L. T. & C. Hagan	757,917
Valve mechanism, H. R. Mason	757,479
Valve, reducing, J. J. Burke	757,881
Valve, throttle, R. A. McKee	757,486
Vehicle body hanger, H. Jones	757,623
Vehicle brake, H. P. Maxim	757,940
Vehicle lamp holder attachment, A. Groff	757,914
Vehicle running gear, C. P. Malcolm	757,476
Vehicle running gear, motor, H. P. Maxim	757,941
Vehicle, steam-propelled, H. K. Hess	757,808
Vehicle wheel, J. A. Polk	757,677
Vending apparatus, R. E. Payne	757,956
Vending machine, Coleman & Shepard	757,993
Vending machine, F. G. Hartell	758,007
Ventilator, S. H. Jacobson	757,465
Ventilator, C. A. Withers	757,534
Vessels, apparatus for scraping ore from wings of, M. Andrews	757,858
Vessels, self-grip and draw-off attachment for, L. E. Saunders	757,641
Vise, H. S. Hanstine	757,918
Wagon brake, N. Pfeffer	757,959
Wagon spring, C. L. Thomas	757,578
Walking stick and stool, combination, N. F. Russell	757,776
Warping machine, F. Ott	757,491
Washing machine, J. W. Montgomery	757,829
Washing machine, C. Dietz	757,896
Water, apparatus for separating oil and grease from, E. Friesdorf	757,448
Water closet tank valves, mechanism for operating, P. J. Gross	757,738
Water heater, E. E. Murphy	757,563
Wave responsive device, Woodward & Shoemaker	757,802
Wax applying roll or brush, W. A. Reed	757,496
Weeder, wheel, C. Wear	757,796
Welding steel plates, etc., to sheets of aluminium and aluminium-plated other metals, H. Wachwitz	757,582
Wheel traction band, L. Kniffen	757,471
Wheel tread, traction, J. W. Pridmore	757,635
Wind motor, J. J. Williams	757,800
Winding or hoisting drum, H. F. James	757,622
Windlass, G. W. Menefee	757,668
Window, J. Frye	757,865
Window screen, Stout & Turner	757,688
Window screen, extension, G. W. Rockwell	758,021
Wire drawing machine, D. J. McMahon	757,671
Wire stretcher, P. O. Daughters	757,893
Wrench, G. A. Andrus	757,644
Wrench, E. Howell	757,747
Wrench, J. N. Noyer	757,764
Wrench, W. H. W. Beecher	758,035
Yoke center, neck, J. E. Beebe	757,594

DESIGNS.

Bath tub, C. Weelans	36,881
Collar or similar article, A. Schweriner	36,884
Hammock body, I. E. Palmer	36,885
Lavatory, C. Weelans	36,882
Spoons, forks, or similar articles, handle for, G. P. Tilton	36,879
Stove, P. H. Ficken	36,883
Toy bank, A. C. Williams	36,880

TRADE MARKS.

Absinthe, O. L. Pernod	42,402
Asthma, compound for the cure of, Williams & Cole	42,445
Axle grease, W. N. Ley	42,412
Baths, chemical preparations for sulphur, Chemische Fabrik Vechelde A. G.	42,422
Bearings for machines, journal and shaft, D. E. Kempster	42,464
Bearings for sheaves, D. E. Kempster	42,463
Beer, lager, Cumberland Brewing Co. of Allegheny County	42,441
Boots and shoes, leather, P. W. Minor & Son	42,395
Boots and shoes, leather, George E. Keith Co.	42,436
Bread, J. E. Blackburn	42,408
Bread, biscuits, and cakes made from bananas, W. A. Jones	42,409
Cement, Portland, Empire Portland Cement Co.	42,453
Coffee, Direct Coffee Co.	42,403
Corset bones, J. Janowitz	42,430
Corsets, Birdsey & Somers	42,392
Cuff holders, H. C. Frank	42,426
Dress goods, certain named, Joy, Langdon & Co.	42,431
Fabrics, certain named woven, Hodges Fiber Carpet Co.	42,393
Fish hooks and fishing tackle, Henry Milward & Sons	42,458
Flax fiber products for certain named purposes, Union Fiber Co.	42,432
Flour, wheat, Royal Milling Company	42,405
Food for animals, Shamrock Stock Food Co.	42,437
Food preparations, artificial, Chemische Fabrik von Heyden, Aktiengesellschaft	42,410
Gages, pressure and vacuum, Standard Gage Manufacturing Company	42,396
Hair tonic, A. Koppelberger	42,444
Hardware, carriage makers', H. D. Smith & Co.	42,398
Laces, shoe, J. Einstein	42,435
Leather goods, polishes for, Whittemore Bros. & Co.	42,411
Leather, upper, Victor R. F. Walker Co.	42,394
Malt liquors, certain named, Barclay, Perkins & Co.	42,439, 42,440

All over the civilized world
THE IMPROVED
BOSTON GARTER
IS KNOWN and WORN
Every Pair Warranted
The Name is stamped on every loop—
The Velvet Grip
CUSHION BUTTON CLASP
Lies flat to the leg—never Slips, Tears nor Unfastens
ALWAYS EASY
Send 50c. for Silk, 25c. for Cotton, Sample Pair.
Geo. Frost Co., Makers, Boston, Mass., U. S. A.
REFUSE ALL SUBSTITUTES

SENSITIVE LABORATORY BALANCE.

By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a $125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1184.** Price 10 cents. For sale by MUNN & CO., 136 Broadway, New York City, or any bookseller or newsdealer.

"Globe" GASOLINE Marine Engines

Improved. Simple. Reliable, Economical, Substantial. Prices Right. Guaranteed. Write for Catalogue. Built by....

PENNSYLVANIA IRON WORKS CO., Philadelphia, Pa. and 136 Liberty St., New York. U. S. A.

MENNEN'S BORATED TALCUM TOILET POWDER



A Positive Relief For PRICKLY HEAT, CHAFING, and SUNBURN, and all afflictions of the skin.

Removes all odor of perspiration. Delightful after Shaving. Sold everywhere, or mailed on receipt of 25c. Get Mennen's (the original). *Sample Free.*

GERHARD MENNEN COMPANY, Newark, N.J.

MECHANICALLY FASTENED
Fisk Tires

Stay on the Rim when in use, but can be detached by a novice. Get a catalogue describing it.

FISK RUBBER COMPANY
Chicopee Falls, Mass.

BRANCHES AND REPAIR DEPOTS: Boston, Springfield, New York, Philadelphia, Washington, Syracuse, Buffalo, Detroit, Omaha, Chicago, St. Louis, Minneapolis, Denver, San Francisco, Los Angeles, London, Eng.

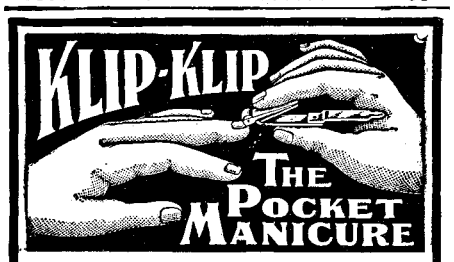

COSTS 25 CENTS LASTS 25 YEARS

Solid German Silver. Trims, Files and Cleans the nails with either hand. Don't take imitations. Sold everywhere or by mail for **25c.** Money back if you want it. Manicure Book, **"A Handy Hand Book of the Hands"**—complete instruction on the care of the hands and nails. Sent for two 2c. stamps.

Klip-Klip Co., 556 Clinton Ave. S., Rochester, N. Y.

Trade Mark

ORDER BY MAIL

The Famous Hosiery Which is Superior to All Others FOR WEAR.

All Sizes 3 PAIR FOR $1.00

Send Postal for Illustrated Booklet

10c. extra for Mailing Each Three Pairs

Men's Women's and Children's

Never Surrender Hosiery

ALL WEIGHTS AND KINDS
COTTON OR LISLE THREAD

Order for the entire family

For 62 years the Leading Dry Goods Store of Worcester

BARNARD, SUMNER & PUTNAM CO.
Worcester, Mass.

© 1904 SCIENTIFIC AMERICAN, INC

Founded by Mathew Carey, 1785.
A House in touch with Three Centuries.

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U.S.A.

☞ *Our New and Revised Catalogue of Practical and Scientific Books, 94 pages, 8vo; a Catalogue of Books on Metallurgy, Mining, Prospecting, Mineralogy, Geology, Assaying, Analysis, etc.; a Catalogue of Books on Steam and the Steam Engine, Machinery, etc.; a Catalogue of Books on Sanitary Science, Gas Fitting, Plumbing, etc., and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to anyone in any part of the world who will furnish his address.*

ELECTRICAL ENGINEERING TAUGHT BY MAIL.

Write for our Free Illustrated Book.
"CAN I BECOME AN ELECTRICAL ENGINEER?"
We teach Electrical Engineering, Electric Lighting, Electric Railways, Mechanical Engineering, Steam Engineering, Mechanical Drawing, at your home by mail. Institute indorsed by Thos. A. Edison and others.
ELECTRICAL ENGINEER INSTITUTE,
Dept. A, **240-242 W. 23d St. New York.**

TYPEWRITER HEADQUARTERS
332 Broadway, New York, sell all makes under half-price. Don't buy before sending for samples of writing, prices, exchange and unprejudiced advice. Immense stock for selection. Shipped for trial. Guaranteed first-class condition. Dealers supplied.



A splendid fit across shoulders, chest—everywhere.
MODEL SHIRTS
combine the style, comfort and choice of fabric secured in "made-to-order shirts," with the price of ready made shirts.
LOOK FOR THIS MARK. ASK YOUR DEALER.
MODEL INDIANAPOLIS SHIRT
Try our coat shirts. Write to-day for our booklet—All about good shirts and the style to wear on certain occasions.
Model Shirt Co., 30 Century Bldg. Indianapolis, Ind.

HIGHEST GRADE GREY IRON CASTINGS
For Gasoline Engines and Cylinders
All kinds of Automobile Castings.
FRONTIER IRON WORKS, 2 Auburn Ave., Buffalo, N. Y.

STIMULATION without IRRITATION
Means New Life to the Scalp.

The Evans Vacuum Cap gives the scalp a thorough massage and encourages a free and healthful circulation without rubbing and without the use of drugs or irritants. It will stop hair from falling out and restore a normal growth where live follicles exist. The Cap is used about ten minutes twice a day and its effects are pleasant from the very beginning. We will refund your money in full if results are not satisfactory after a thirty days' use. Call on or address
EVANS VACUUM CAP CO.
ST. LOUIS OFFICE, Fullerton Building.
NEW YORK OFFICE, 1300 Broadway.
NOTE:—To those who find it convenient to call at our offices we will give a sufficient number of demonstrations free to satisfy them as to the merit of this appliance.

TAKE NO SUBSTITUTE
A Dated Guaranty Tag on Each Tire
Protects you against Old Stock
Now Only $4.95 A PAIR Express Paid.
ALLIGATOR PUNCTUREPROOF-SELF-HEALING BICYCLE TIRES
The ORIGINAL and only Puncture-proof and Self-healing Tire made. Nails, tacks, and glass will not let the air out. Positively will not become porous. Strong, durable, resilient. Greatest thickness where needed (see G in illus.) Examine—"feel of it." Sent C.O.D. anywhere, subject to examination—no deposit asked; but we pay express only when cash accompanies order. State diameter of rim and size tire wanted. CATALOG FREE. State and Lake Sts.
THE VIM COMPANY, Sole Manufact'rs, **CHICAGO.**

Mention *Scientific American*

Send for this Book
It's FREE

If you want
Hot Water
instantly, anytime, anywhere.
It tells of the *cheapest* and most convenient way to secure hot water and plenty of it, summer or winter, in bath room, laundry, kitchen, etc., by using the
Humphrey Crescent Instantaneous Water Heater
Sold by all Plumbers.
This heater is handsome in appearance, occupies little space, is easily and quickly installed and lasts a lifetime. Gas is the fuel and less is required than in any other heater giving equal service. Hot water flows the moment the gas is lighted. 50,000 in use. Price $16 to $45, depending upon size. Sent on **30 days trial.**
Humphrey Co., Dept. L, Kalamazoo, Mich.

Medical pastes and salves, Wollwascherei u. Kammerei Dohren bei Hannover..... 42,421
Medical preparation for the treatment of certain named diseases, liquid, Asmo Remedy Co. 42,417
Medicated salt, Bourland & Stevens Bros. 42,413, 42,414
Medicinal and food compounds, certain named, C. F. Boehringer & Soehne.... 42,452
Medicinal preparations, certain named, L. D. Gardner 42,450
Medicine, certain named, L. W. Leithead Drug Co. 42,447
Medicine for the cure of certain named diseases, Duluth Medicine Co. 42,446
Mineral water, H. F. Schnelker..... 42,400
Needles and pins, bodkins, and crochet hooks, certain named, Henry Milward & Sons 42,459
Nut crackers, J. E. Hamilton..... 42,427
Oil, olive, F. Sanguinetti & Cie..... 42,404
Ointments and ointment bases, Schering & Glatz 42,451
Overgaiters, A. E. Little & Co..... 42,434
Paper clips, Cushman & Denison Manufacturing Co 42,425
Pens, fountain, F. C. Brown..... 42,424
Perfumes in solid, liquid, and powdered form, R. Hudnut.....42,442, 42,443
Piano players and self-playing pianos, automatic, Kohler & Campbell..... 42,428
Power transmitting machinery, certain named, Dodge Manufacturing Co..... 42,462
Printing purposes, synthetic or anilin colors for, C. Jager..... 42,423
Razors, C. F. Ern..... 42,426
Remedies, certain named, Iowa Medicine Co. 42,416
Remedies for the cure of certain diseases, J. A. Monger..... 42,448
Remedy for a certain named disease, J. Horsch 42,415
Remedy for worms, internal, Pratt Food Co. 42,449
Rice, Meinrath Brokerage Co..... 42,407
Rock drilling machinery and tools, Ingersoll-Sergeant Drill Co..... 42,397
Rubber hose and cotton hose, Bowers Rubber Company .....42,454 to 42,457
Rye meal, corn meal, pearl and flaked hominy, and grits, Wells-Abbott-Nieman Co. 42,406
Salves used externally, A. V. Mentz..... 42,420
Sewing machines and parts thereof, Illinois Sewing Machine Co..... 42,429
Skirts for women, Wearwell Skirt Co..... 42,433
Sleeping draft, M. A. Quee..... 42,418
Suits for boys, Siegel Cooper Company..... 42,390
Syrup of guaiacol, Davis Pharmaceutical Co. 42,419
Tobacco and cigarettes made therefrom, smoking, J. & F. Bell, Ltd..... 42,438
Tobacco, smoking, Wells-Whitehead Tobacco Co. 42,399
Whisky, Belmont Distillery Co..... 42,401

LABELS.

"Absorbine," for a veterinary medicine, W. F. Young..... 10,986
"Balm of Gilead," for ointment, F. A. Williams 10,987
"Buster Brown Legging," for leggings, H. Jacob & Son..... 10,964
"Buster Brown Ring," for rings, E. & J. Bass 10,965
"Choco," for confectionery, Choco Candy Co. 10,970
"Domestic Pets," for picture blocks, National Novelty Corporation..... 10,967
"Dr. Brooks' Faultless Tooth Powder," for tooth powder, D. L. Brooks..... 10,989
"Egyptian Salve," for salve, W. Wyman... 10,988
"Extra Dry Ginger Ale," for carbonated beverages, American Soda Fountain Co.. 10,980
'Guaistol (Davis) The Only Permanent Sirup of Guaicol," for medicine, Davis Pharmaceutical Co. 10,983
"High Life," for smoking tobacco, R. Harris & Bro. 10,971
"Honey Dew," for smoking tobacco, R. Harris & Bro..... 10,972
"Ino," for beverage, Ino Company..... 10,979
"King's Stop a Cough," for medicine, California Chemical Co..... 10,985
"Life Malt," for malt extract, N. Biever, Jr. 10,981
"Maltozone," for medicine, M. Carnot..... 10,982
"Orange Drip Syrup" for syrup, S. C. Leonard 10,976
"Our Dollies," for picture blocks, National Novelty Corporation 10,966
"Pride of Reidsville," for smoking tobacco, R. Harris & Bro..... 10,973
"Regal Brand Condensed Milk," for condensed milk, United States Condensed Milk Co. 10,975
"Reissmann's A. B. C. Ruler," for rulers, F. Reissman 10,968
"Reissmann's Perfection Mitre Scale," for rulers, F. Reissmann..... 10,969
"Setter," for whisky, J. R. Stonebraker & Co. 10,977
"The Famous Sunbury Creamery Butter," for butter, Sunbury Co-operative Creamery Co. 10,974
"The La Grange," for mineral water, W. H. Thomas 10,978
"X-o Quick Cure," for medicine, A. Crichton 10,984

PRINTS.

"An Adler Serge Suit," for men's apparel, David Adler & Sons Clothing Co..... 960
"Arabian Chocolates," for candy, Gray Litho Co. 965
"Arcadian Chocolates," for candy, Gray Lithograph Co. 972
"Attractive Summer Footwear for Women," for shoes, O. McCormick..... 961
"Duchess Chocolates," for candy, Gray Lithograph Co. 974
"Finest Chocolates," for candy, Gray Lithograph Co. 973
"Harriet Hubbard Ayer's Face Cream," for face cream, H. A. Seymour..... 962
"Kleanwell Tingle Sponge," for rubber sponges, A. H. Smith..... 964
"Little Tingler," for rubber sponges, A. H. Smith 963
"Outing Assorted Fine Chocolates," for candy, Gray Lithograph Co..... 976
"Princess Assortment Chocolates," for candy, Gray Lithograph Co..... 975
"Princess Chocolates," for candy, Gray Litho. Co. 971
"Puritan Chocolates," for candy, Gray Litho Co. 968
"Purity Bon Bons and Chocolates," for candy, Gray Litho. Co..... 970
"Purity Health Chocolates," for candy, Gray Litho. Co. 969
"Purity Italian Chocolates," for candy, Gray Litho. Co. 966
"Society Chocolates," for candy, Gray Litho Co. 967

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address **Munn & Co., 361 Broadway, New York.**

PERFORATED METALS
FOR ALL USES. MADE AS REQUIRED.
HARRINGTON & KING PERFORATING CO., 225 N. UNION ST. CHICAGO.

EASIER TO ROW — ABSOLUTELY SAFE



Write to-day for free catalogue
15-foot boat, crated **$29.00** seat five persons in comfort. able for ladies and children.
Mullins Unsinkable Steel Pleasure Boats
Made of steel. Practically indestructible Air chamber each end. Cannot sink. Cannot leak. Require no caulking. Ideal boat for family use, summerresorts, parks Guaranteed. Will The modern row boat for pleasure, safety and durability. No other boat so desir-
W. H. MULLINS, 384 Depot St., Salem, Ohio

SPECIAL MANUFACTURING.
DIES AND STAMPINGS TO ORDER.
SPEC'L MACHINERY-MODELS-EXPERIMENTAL WORK.
DROP FORGING DIES AND DROP FORGINGS.
HARDWARE SPECIALTIES ETC. MANFD. TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.
THE GLOBE MACHINE & STAMPING CO.
970 HAMILTON ST., CLEVELAND, OHIO.

Export Trade
How to Secure and How to Hold It
Valuable hints on how to secure Export Trade sent gratis on request. Address
EXPORT EXPERT
Box 773, New York

ICE MACHINES, and Bottlers Machinery. **Corliss Engines,** Brewers' THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BAILLARD, Fox Bldg., Franklin Square, New York.

SPECIAL MACHINERY Tools and Dies. Model & Experimental Work. **Costilo Machine Works,** 60 Centre St., New York

CHEMICAL EXAMINATIONS OF ALL KINDS.
DR. H. C. STIEFEL, Bissell Block, Pittsburgh, Pa.

The National Sheet Metal Works is especially equipped to manufacture small articles stamped, pressed, cut from sheet metal. White metal casting and plating a specialty.
The National Sheet Metal Co., Peru, Ill.

MODELS & GEARS CATALOGUES FREE. UNION MODEL WORKS 193 CLARK CHICAGO.

PEACH TREES, 4 to 6 ft., 3 cts. 3 to 4 ft., 2½ cts. Circular free. Trees kept dormant late as May 15 if desired. R. S. JOHNSTON, Box 75, Stockley, Del.

First Class Lathe and Bench Work, Die-Sinking and Chasing. J. T. WAITE, 275 Water St., New York.

WORKING MODELS furnished of your invention. Send drawing and description for estimates. J. WEINERT & CO., 134 Pierce Ave., Chicago, Ill.

"THE CRYSTAL" "ONE CENT" Plate Glass Gum Vender
Designers and constructors of vending machines of all kinds, on contract.
MICHIGAN NOVELTY WORKS, Kalamazoo, Mich,

MODEL Draughting and Experimental Work Inventions developed. Salable articles. Manufactured on royalty or contract.
MARION MODEL WORKS, Box 487, Marion, Ind.

National Supply Co. 835 Broadway, N.Y.
Model Makers and Manufacturers of
PATENTED ARTICLES, ETC.

DRYING MACHINES. S. E. WORRELL Hannibal, Mo.

Are you interested in Patents, Model or Experimental work? Our booklet entitled
WHAT WE DO—HOW WE DO IT
will be sent to you on request.
KNICKERBOCKER MACHINE WORKS, Inc., 8-10-12 Jones Street, New York.

$62.00 TO LOS ANGELES AND SAN FRANCISCO AND RETURN VIA THE NICKEL PLATE ROAD.
Tickets on sale April 22d to May 1st inclusive. Good returning until June 30th, 1904. Stop off privileges. For full particulars see local Agents. or write R. E. Payne, General Agent, 291 Main St., Buffalo, N. Y., or A. W. Ecclestone, D. P. A., 385 Broadway, New York.

SEALED PROPOSALS WILL BE RECEIVED AT the office of the Light-House Engineer, Tompkinsville, N. Y., until 1 o'clock p. m., Monday, May 16, 1904, and then opened, for extending and repairing wharf at New London Buoy Depot, New London, Conn., in accordance with specifications, copies of which, with blank proposals and other information, may be had upon application to Major William T. Rossell, Corps of Engineers, U. S. A., Engineer.

PROPOSAL FOR SEWAGE DISPOSAL.
Bids will be received up to ten o'clock A. M., May 12th, 1904, for the erection of a sewage system to include boiler, pumps, reservoirs, and all pipes and connections necessary to install a broad irrigation system for disposal of sewage, at the State Hospital for the Insane, at Danville, Pa.
The specifications can be had at the Institution and personal inspection of the grounds will be required.
The right to reject any bid or estimate is reserved.
H. B. MEREDITH, M. D.,
Superintendent.

IMPORTANT TO WIRE MANUFACTURERS
For Sale.—Patent and Machine producing staple article of very large consumption made of steel wire. This machine makes at a great saving of cost a much superior article than the one now made by hand. Interested parties can see the machine in operation and get further information by addressing, R.E., box 842, N.Y.

MODELS CHICAGO MODEL WORKS ESTAB'D SHED 1867. 178 E. MADISON ST. CHICAGO, ILL. WRITE FOR CATALOGUE OF MODEL SUPPLIES.

SPLITDORF SPARK COILS
25 VANDEWATER ST. N.Y.

MODEL AND EXPERIMENTAL WORK.
Electrical and Mechanical Instruments. Small Mach'y.
EDWARD KLEINSCHMIDT, 82 W. Broadway, New York.

BUILDERS of Special Machinery. Models Experimental work. Inventions developed. THE FENN-SADLER MACH. CO., Hartford, Conn.

Dies, Tools, Models and Special Machinery. Metal Specialties and Stampings Manufactured. HOEFT & MOORE, Chicago, U. S. A. OFFICE: 836 FIFTH AVENUE. WORKS: INDIANA & FRANKLIN STREETS.

AUTOMOBILE Parts. Our line of automobile parts is complete and embraces new and original ideas in construction. Send for Catalogue and Prices.
OTTO KONIGSLOW, Cleveland, Ohio.

Specialties Manufactured. Special machinery built. **Nye Tool & Machine Works,** 200 So. Clinton St., Chicago.

NAME PLATES—STEEL STAMPS
EMPLOYEE CHECKS, KEY TAGS & BADGES.
J. ROBBINS MFG. CO. 58 KNEELAND ST.
SEND FOR CATALOGUE ····BOSTON, MASS.

PUNCTURE PROOF HEDGETHORN BICYCLE TIRES

REGULAR PRICE $8.50 TO INTRODUCE WE WILL SELL YOU A SAMPLE PAIR FOR ONLY $4.80
STRONG, DURABLE, EASY RIDING, SELF-HEALING
NO MORE TROUBLE FROM PUNCTURES
Result of 15 yrs. experience. Fully covered by patents. Beware of imitations. No danger from thorns, cactus, pins, glass, tacks or nails. Serious punctures like intentional knife cuts can be readily vulcanized. Guaranteed not to become porous. NOTE the thick tread and puncture-proof sections—will outlast any other make. Soft, elastic and easy riding. We will ship C.O.D. on approval without a cent deposit. If you order direct from this advertisement, sending cash, we will prepay express charges. Pump free with each pair.
Send for CATALOG "T," showing all makes and kind of tires, bicycle sundries, coaster brakes, built-up-wheels, etc., at half usual prices.
MEAD CYCLE CO., Dept. T-59 ***Chicago, Ill.***

Radium
The Spinthariscope, improved, very brilliant, with particle of radium, postpaid, **$9.00**
New Radiant Tubes, containing radium and radioactive salts for lecture demonstration, **$7.50**
Ten milligrams radium, 7,000 activity, **$17.50**
WILLIAMS, BROWN & EARLE
Dept. 6 **918 Chestnut St., Philadelphia, Pa.**

"Time trieth Truth"
and time proveth
the accuracy of the
ELGIN WATCH
Every Elgin Watch is fully guaranteed. All jewelers have Elgin Watches. "Timemakers and Timekeepers," an illustrated history of the watch, sent free upon request to
ELGIN NATIONAL WATCH CO., ELGIN, ILL.

Put Your Money in Upper Peninsula Land
$10.00 down and **$10.00** per month will buy you **40 acres** of good **farming land** in the **Upper Peninsula of Michigan.** This land is close to markets, good towns and railroads. Hundreds of settlers will go to this country this Spring and land values will increase. **NOW** is your time to make a safe, permanent, profitable investment. No if's or an's about it. Write to us to-day—now.
UPPER PENINSULA LAND CO., Ltd., 846 Washington Arcade, Detroit, Mich.
F. J. MERRIAM, GEN. MGR.
REFERENCES—ILLINOIS TRUST & SAVINGS BANK, Chicago, Illinois; COLONIAL TRUST COMPANY, New York, N. Y.; CLEVELAND CLIFFS IRON COMPANY, Cleveland, Ohio.

© 1904 SCIENTIFIC AMERICAN, INC

WINTON

WINTON is KING
Long live the King

THE WINTON MOTOR CARRIAGE CO., Cleveland, U.S.A.

Orient Buckboard



With Two Speed
Price, $425
4 H. P.
Weight, 500 lbs

The little machine that has in one year gained a reputation bounded only by the limits of the earth.

Write for catalogue.

WALTHAM MANUFACTURING CO.
Waltham, Mass.



CHARTER

GAS and GASOLINE

For All Work.
Stationaries, Portables, Hoisters, Pumpers, Sawing & Boat Outfits.
Send for Catalogue and Testimonials.
State Your Power Needs.
CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

STEAM HEATERS

For Manufacturing and Laboratory Purposes

Made with finished surface in various sizes. Write for circular and prices.

J. A. STOWELL CO.
Leominster - - - - Mass.

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill

What Is Daus' Tip-Top?



TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on **ten (10) days' trial.**
Price $7.50 less trade discount of 33⅓ per cent, or $5 Net

The Felix F. Daus Duplicator Co., Daus Bldg, 111 John St., New York

Radium Finest selected specimens Pitchblende and Carnotite—radium ores—by express $1 each. Will make picture through block of wood, etc. Radium of moderate activity—affects photo plate vigorously in two hours or less—$10 per gram. H. H. BUCKWALTER, 713 Lincoln, Denver, Colo.

MICROSCOPES

Our Microscopes, Microtomes, Laboratory Glassware, Chemical Apparatus, Chemicals, Photo Lenses and Shutters, Field Glasses, Projection Apparatus, Photo-Micro Cameras are used by the leading Laboratories and Government Departments Round the World. Catalogs free.

Bausch & Lomb Opt. Co.
ROCHESTER, N. Y.
New York Chicago Boston Frankfurt, G'y

Coats of Arms

Established for Trade-Marks, Stationery, Carriage and Auto-Panels, Etc.
Genealogies Traced.
Colonial Records and Registers Scrutinized.
Revolutionary Lineages.
St. Botolph Research Bureau
181 St. Botolph St., BOSTON, MASS.

Shippers Buyers Superintendents
Clerks Managers Foremen
Salesmen Bookkeepers Stenographers

Learn Business System

The development within ten years of Scientific **BUSINESS SYSTEM** marks a new vocation for bright young men; many are now employed by the several firms of high reputation who make it a business (not of auditing) but of *systematizing* factories and stores from receipt of goods or raw material to output. Others who have learned the principles of Modern Business System are filling lucrative positions in factories or stores. The demand for men so trained greatly exceeds the supply. For full particulars address Dept. B.

BOSTON SCHOOL OF BUSINESS SYSTEM
227 Washington St., Boston, Mass.

RUST ON GUNS TOOLS & CYCLES **PREVENTED** BY **MANNOCITIN**
C. H. BESLY & CO. CHICAGO ILL. U.S.A.
15 to 21 Clinton Street.

W. L. DOUGLAS $3.50 SHOES

UNION MADE — BEST IN THE WORLD



$10,000.00 REWARD will be paid to any one who can prove that W. L. Douglas does not make and sell more men's $3.50 shoes than any other manufacturer in the world.

The reason W. L. Douglas $3.50 shoes are worn by more men in all stations of life than any other make is because they hold their shape, fit better, wear longer and are of greater value than any other $3.50 shoe.

2,473,464 PAIRS OF FINE SHOES WERE MADE AND SOLD BY W. L. DOUGLAS IN 1903.

"For years I could not believe it possible to make a first-class shoe for $3.50, until at last I tried a pair of your $3.50 shoes. I am now convinced that W. L. Douglas $3.50 shoes are the best in the world for the money."—Merritt L. Brown, with Knox, the Hatter, New York.

W. L. Douglas High-Grade Boys' Shoes, $2.00 and $1.75.

Douglas uses Corona Coltskin in his $3.50 shoes. Corona Colt is conceded everywhere to be the finest patent leather yet produced.

Fast Color Eyelets Used Exclusively.

Douglas has the largest men's $3.50 Shoe Mail Order Business in the world. No trouble to get a fit by mail. State size and width; narrow, medium or wide toe; with or without cap on toe; kind of leather desired; congress, lace or button. 25c. extra prepays delivery.

W. L. Douglas $3.50 shoes are sold through his own retail stores in the principal cities, and shoe dealers everywhere. No matter where you live, Douglas shoes are within your reach. If you desire further information before purchasing, write for Illustrated Catalogue.

W. L. DOUGLAS, 157 SPARK STREET, BROCKTON, MASSACHUSETTS.

SAVE ONE THIRD

By Buying of the Makers

We are actual manufacturers—not a commission house. We can and do save our customers one third on retail prices by selling direct to user and cutting out all dealers' profits. All our goods carry our guarantee. Our free illustrated catalogue shows a greater assortment of carriages and harness than any dealer can show you. Send for it.

THE COLUMBUS CARRIAGE AND HARNESS COMPANY, COLUMBUS, OHIO.



COLD GALVANIZING.

AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.



NICKEL AND Electro-Plating Apparatus and Material.
THE
Hanson & Van Winkle Co.,
Newark, N. J.
92 William St., N. Y.
30 & 32 S. Canal St.
Chicago.



O=O=O=O!

BE YOUR OWN BOSS

Better than a bank account

An opportunity to make one's self independent. Own what is better than a bank account, and learn what no one can take from you: the profession of a Watchmaker, Engraver, and Optician. By taking a course in our school you become a skilled Watchmaker, Engraver, and Optician equipped to bear the brunt of life's battles, and earn at the outset from $1,000 to $1,200 per year.

The standing of this school insures prompt recognition for our graduates as well as profitable positions.—The greatest watchmaking center in the world.

Dept A. Pamphlet mailed free upon request.
Waltham Horological School Waltham, Mass



BRISTOL'S RECORDING INSTRUMENTS.

Pressure Gauges, Vacuum Gauges. Voltmeters, Amperemeters, Wattmeters, and Thermometers, make continuous records *Day and Night.* Will pay for themselves. Every instrument fully guaranteed and sent on 30 days' trial. ☞ *Send for Circulars and Specimen Chart.*
The Bristol Company, Waterbury, Conn
SILVER MEDAL PARIS EXPOSITION.

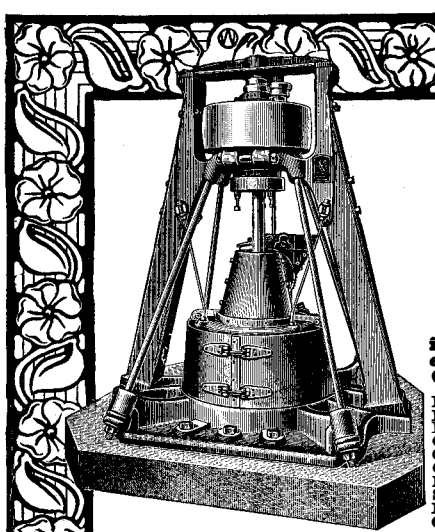

THE GRIFFIN MILL

is conceded to be the highest type of mill for Portland Cement work ever produced. 579 sold in two years to the following large Portland Cement Works in the United States and Canada:

Lehigh Portland Cement Co.,	Ormrod, Pa.	Texas Portland Cement & Lime Co.,	Dallas, Tex.
Lehigh Portland Cement Co.,	Mitchell, Ind.	Iola Portland Cement Co.,	Iola, Kan.
Lehigh Portland Cement Co.,	Wellston, Ohio	Wabash Portland Cement Co.,	Stroh, Ind.
Central Cement Co.,	Coplay, Pa.	Kansas Portland Cement Co.,	Iola, Kansas
Glens Falls Portland Cem. Co.,	Glens Falls, N.Y.	Alma Cement Co.,	Wellston, Ohio
Cuyaga Lake Cement Co.,	Ithaca, N. Y.	Aetna Portland Cement Co.,	Fenton, Mich.
National Portland Cement Co.,	Durham, Ont.	Penn-Allen Portland Cement Co.,	Allentown, Pa.
Sandusky Portland Cement Co.,	Syracuse, Ind.	Martins Creek Portland Cement Co.,	Martins Creek, N. J.
Newaygo Portland Cement Co.,	Newaygo, Mich.	Wolverine Portland Cement Co.,	Coldwater, Mich.
Great Northern Portland Cement Co.,	Baldwin, Mich.	Bronson Portland Cement Co.,	Bronson, Mich.
Midland Portland Cement Co.,	Bedford, Ind.	Quaker Portland Cement Co.,	Sandts Eddy, Pa.
Bonneville Portland Cement Co.,	Siegfried, Pa.	Diamond Cement & Litho. Stone Co.,	Chicago, Ill.
Iroquois Portland Cement Co.,	Caledonia, N. Y.	Mississippi Val. Portland Cem. Co.,	Louisiana, Mo.
Alpha Portland Cement Co.,	Alpha, N. J.	Belleville Portland Cement Co.,	Belleville, Ont.
Whitehall Portland Cement Co.,	Cementon, Pa.	Toledo Portland Cement Co.,	Manchester, Mich.
Struthers Furnace Co.,	Struthers, Ohio		

Surely that is evidence enough of its great superiority over all other makes. The way it works is the reason; most work, best work, in least time, at least expense.

Illustrated catalogue shows what you need. And it is free!

BRADLEY PULVERIZER COMPANY, 92 State St., Boston, Mass.

ACCURATE RELIABLE DURABLE

New England WATCHES

STYLISH & EFFECTIVE IN DESIGN

Perfection in time-keeping quality, combined with beauty of design, must of necessity create that feeling of satisfaction known to the users of our watches

THE NEW ENGLAND WATCH CO., 37 & 39 Maiden Lane, New York
7 Snow Hill, London, England



We have complete Outfits for....

YOUR OWN ELECTRIC LIGHTS

Any size place, summer homes, launches, yachts, etc. Every detail included; very best material; practical. So simple no electrician required. **Light All the Time,** as storage battery included. **Gas, Gasoline** or **Steam** engines used give plenty of power for pumping water, sawing wood, refrigeration, etc. For printed matter address

ELECTRIC DEPARTMENT
RICHARDSON ENGINEERING CO., Hartford, Conn.



A Practical Car for American Roads.

Three Speeds and Reverse, Sliding Transmission, Interlocking Devices Throughout. Bevel Gear Drive Direct in Top Speed.

2 cylinder upright motor, 18-20 Horse Power.
4 " " " 32-35 " "

Prices $2,300 to $4,000.

Aluminum Bodies. Canopy Top or Limousene Types. Descriptive Catalogue sent upon request.

ROYAL MOTOR CAR CO.,
100 Marquette St., Cleveland, Ohio, U. S. A.

AMERICAN JUMP SPARK IGNITION OUTFITS

MARINE
AUTOMOBILE

STATIONARY
MOTORCYCLE

SEE CATALOGUE W.
AMERICAN COIL COMPANY, Somerville, Mass.

The culmination of progressive enterprise

Western Department, Chicago, Ill. **Two-Speed Gear, Coaster Brake** Eastern Department, Hartford, Conn.

CHAINLESS BICYCLES

Catalogues free at our 10,000 dealers' stores or any one catalogue mailed on receipt of 2-cent stamp.

POPE MANUFACTURING COMPANY

The Hoggson Pocket Time Stamp

Prints Year, Month, Day, Hour and Minute, correctly timing every act, operation or transaction. An absolute necessity in every business. S. H. HOGGSON & CO.
267-269 West 17th Street, NEW YORK.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM JESSOP & SONS LD 91 JOHN ST. NEW YORK

© 1904 SCIENTIFIC AMERICAN, INC